



SPECIAL GAMES ISSUE

Swords And Sorcery II 42

Test your courage against Trolls, Dragons and Hot Dog vendors.

Tape Librarian by Raymond J. Herold	100
Code Cracker by James P. Morgan	110
Software Lock by M. D. Kelleher	118

Star Search 50

Control the starship Enterprise, while you reach into the galaxy.

Life in the Fast Lane by Terry Kepner & Claud M. Grace.	62
A Heartbeat Away by Clinton Morey	76
Slot Machine by Stewart Fason	84

On The Radio 86

Schedule your station's broadcast with this disco-based system.

Cheap Video by Paul C. Fowler, Jr.	116
PR-40 Printer Interface by John Hise	152
Graphic Sort by C. A. de Zoysa	166



Plus:

More than 30 articles, reviews and columns.

Complete contents on page 5.

*TRS-80 is a trademark of the Tandy Corp.



The easiest, least expensive way to generate spectacular multi-color graphics, sharp two-color alphanumerics: Your computer, a color tv set and the Percom Electric Crayon™.

Add the Electric Crayon™ to your system and your keyboard becomes a palette, the tv screen your medium.

You dab and stroke using one-key commands to create dazzling full-color drawings, eye-catching charts and diagrams.

Or you run any of innumerable programs. Your own BASIC language programs that generate dynamic pyrotechnic images, laugh-provoking animations.

From a combined alphanumerics-semi-graphics mode to a high resolution 256- by 192-element full graphics mode, the microprocessor-controlled Electric Crayon™ is capable of generating 10 distinctly different display modes.

Colors are brilliant and true, and up to eight are available depending on the mode.

As shipped, the Electric Crayon™ interfaces a TRS-80* computer. It may be easily

adapted for interfacing to any computer or to an ordinary parallel ASCII keyboard.

But that's not all

The Electric Crayon is not just a color graphics generator/controller.

It is also a complete self-contained control computer. With built-in provision for 1K-byte of on-board program RAM, an EPROM chip for extending EGOS™, its on-board ROM graphics OS, and a dual bidirectional eight-bit port — over and above the computer/keyboard port — for peripherals. The applications are endless.

Shipped with EGOS™, 1K-byte of display memory and a comprehensive user's manual that includes an assembly language listing of EGOS™ and listings of BASIC demo programs, the Electric Crayon™ costs only \$249.95.

Options include:

- LEVEL II BASIC color graphics programs on minidiskette: \$17.95.
- A 34-conductor ribbon cable to interconnect the Electric Crayon™ to a TRS-80*: \$24.95.
- RAM chips for adding refresh memory for higher density graphics modes: \$29.95 per K-byte.
- Electric Crayon™ Sketchpad, a sketching grid of proportioned picture elements (pixels) in a tv aspect ratio. For 128 x 192 or 256 x 192 graphics modes. 11-inch by 17-inch, 25-sheet pads: \$3.95 per pad.

SYSTEM REQUIREMENTS: the video circuitry of the Electric Crayon™ provides direct drive input to a video monitor or modified tv set. An internal up-modulator for rf antenna input may be constructed by adding inexpensive components to the existing video circuitry.

Prices and specifications subject to change without notice.



PERCOM DATA COMPANY, INC.
211 N. KIRBY GARLAND, TEXAS 75042
(214) 272-3421

™ = trademark of Percom Data Company, Inc.

* = trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

Get into computer color graphics the easy, low-cost way with a Percom Electric Crayon™. Available at Percom dealers nationwide. Call toll-free, **1-800-527-1592**, for the address of your nearest dealer, or to order direct if there is no Percom dealer in your area.

Quality is the real difference. Low price is merely a dividend.

High quality.
Competitive pricing.
And a proven track record.

Three reasons why Percom is the industry's number one independent manufacturer of mini-disk systems for microcomputers.

And if you're looking at mini-disk drives, extra storage capacity is an added bonus.

In fact, you store almost one fifth more data on Percom TFD-100[™] drives and over two-and-one-fourth times as much on TFD-200[™] drives.

Besides extra testing and superior design, you get free, with each system, a software patch on minidiskette that not only upgrades TRSDOS* for operation with the newer 40- and 77-track drives, but also deglitches version 2.1.

Available in 1-, 2- and 3-drive configurations, Percom drives for the TRS-80* computer start as low as \$399.

The gift of speech



Called Speak-2-Me-2[™], this clever interface module makes a Texas Instruments†

Speak & Spell† the voice of your computer — announcing, imploring, commanding with expressions and sentences created from the Speak & Spell† vocabulary.


Speech is controlled either at the keyboard or by your own Level II BASIC programs. Or by Percom, minidiskette word games (available soon).

Speak-2-Me-2[™] is installed in the battery compartment of your Speak & Spell†, and power is provided from an ordinary calculator power pak. Supplied with an interconnecting cable, operating software and a comprehensive users manual, Speak-2-Me-2[™] costs only \$69.95.

(Speak & Spell[™] not included.)




✓ 408

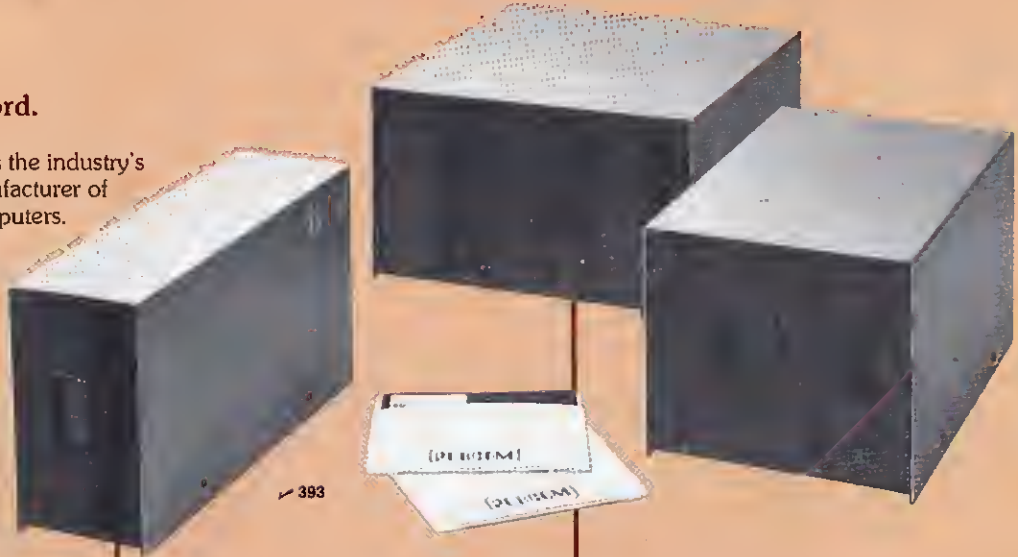

✓ 393

the Separator:™ End "CRC error. Track locked out!"



This plug-in adapter virtually eliminates data read errors, a problem that plagues

TRS-80* computer systems. The SEPARATOR[™], so called, is installed in the Expansion Interface without modifying the host system. When installed, data and clock signals are reliably separated during playback, an essential function that the separator circuitry of the host computer performs very poorly. Price is only \$29.95.

Note. Opening the Expansion Interface may void the Tandy limited 90-day warranty.

✓ 409

OS-80[™] uses Level II BASIC commands

With OS-80[™], Level II BASIC commands are used for DOS and Disk BASIC functions.

You extend the OS-80[™] utility set indefinitely with your own BASIC disk-resident utilities.

OS-80[™] resides in less than 7-Kbytes of RAM.

The program is supplied on minidiskette along with a simple file manager, BASIC disk utilities and an OS-80[™] "Handbook" that you expand and maintain.

All are helpful programming examples.

Price, with instruction manual, \$29.95.



✓ 410

NEW! OS-80[™]
Machine Language
SAVE / LOAD
Utility. Only
\$19.95 on
minidiskette w/instructions.

Quality Percom products are available at Percom dealers nationwide.
Call Percom's toll-free order number, 1-800-527-1592,
for the address of your nearest dealer or to order direct.

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PERCOM DATA COMPANY, INC.
211 N. KIRBY GARLAND, TEXAS 75042
(214) 272-3421

✓ 258

PERCOM

[™] trademark of Percom Data Company, Inc.

* trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

† trademark of Texas Instruments, Inc.



META TECHNOLOGIES

FOR YOUR TRS-80® DISK SYSTEM



★ NEW ★ MTC AIDS-III* ★ NEW ★

MODEL I . . . \$69.95

MODEL II . . . \$99.95

Introducing the latest addition to MTC's family of data management systems, AIDS-III. NO PROGRAMMING, easy to use. COMPLETE PACKAGE including demonstration application, documentation and MAPS-III (see below).

- Up to 20 USER-DEFINED FIELDS of either numeric- or character-type.
- CHARACTER-type fields may be any length (total: up to 254 characters).
- NUMERIC-type fields feature automatic formatting, rounding, decimal alignment and validation.
- Full feature EDITING when adding or changing records:
 - ENTER FIELD (can't type-in more characters than specified).
 - BACKSPACE (delete last character typed).
 - DELETE FIELD contents.
 - RESTORE FIELD contents.
 - RIGHT-JUSTIFY FIELD contents.
 - SKIP FIELD (to next or previous field).
 - SKIP RECORD (to next or previous record).
- SORTING of records is MACHINE CODE assisted.
 - 200 RECORDS (40 characters) in about 5 SECONDS.
 - ANY COMBINATION of fields (including numerics) with each field in ascending or descending order.
- SELECTION of records for Loading, Updating, Deleting, Printing and Saving is MACHINE CODE assisted.
 - Specify up to 4 CRITERIA, each using one of 6 RELATIONAL COMPARISONS.
 - LOAD or SAVE selected records using MULTIPLE FILES.
 - Example: Select records representing those people who live in the state of Colorado, but not in the city of Denver, whose last names begin with "F" and whose incomes exceed \$9000.00.
 - Example: Select records representing those sales made to XYZ COMPANY that exceed \$25.00, between the dates 03/15 and 04/10.

MAPS-III (MTC AIDS PRINT SUBSYSTEM), included at no charge, has the following features:

- Full AIDS-III SELECTION capabilities.
- Prints user-specified fields DOWN THE PAGE.
- Prints user-specified fields in titled, columnar REPORT FORMAT, automatically generating column headings, paging and (optionally) indentation.
- Can create a single report from MULTIPLE FILES.
- Prints user-defined formats for CUSTOM LABELS, custom forms, etc.

BELOW ARE TESTIMONIALS from owners of AIDS systems. These are absolutely authentic statements and are typical of the comments we receive.

"This program will do more for my business than all the other programs I have combined."

David Wareham, Vice President (EDP), National Hospital and Health Care Services Inc.

"We have 32 different Data Base Management packages for the TRS-80. AIDS-III is easily the best. It also makes it easier for us to step up to our Model II since the package is available for both computers."

Jack Bilinski, President, 80 Microcomputer Services

"Your AIDS program is far and away the finest information management system that I've ever seen. I am currently using it to maintain a clear picture of the demographic data on all the kids in our residential treatment program and it is working for me superbly."

Frank Boehm, Director, Front Door Residential Treatment Program

- COMPATIBLE with AIDS-II data files and AIDS subsystems.
- Move up from AIDS-II and EXPAND to 20 field capability WITHOUT REENTERING DATA.
- AIDS-II (Model I or II) owners may UPGRADE FOR ONLY \$25.00.

*WARNING! This program is written in BASIC and can be listed in the normal manner. Modification of program code is NOT RECOMMENDED due to its extreme complexity.

MTC AIDS - II

Ailing information? Doctor it up with AIDS-II. This Automated Information Directory System offers twelve user-defined fields with full feature editing when adding or changing records. Selective Loading, Updating, Deleting, Printing and Saving records may be accomplished using any of six relational comparisons. Also features machine code assisted sorting (200 records in about 5 seconds) by any combination of fields, and much more! Unique "windowing" capability allows directories of unlimited size. Window size is typically 200 or more records in 32K. Can be used for mailing lists, client reference reporting, appointment "calendars", inventory records and other information systems. Easy to use. Defining a system takes about a minute. MAPS-I (MTC AIDS PRINT SUBSYSTEM) is included at no charge. MAPS features full AIDS-II selection capabilities, prints user-specified fields down the page, produces user-specified columnar report formats with automatically generated column headings and paging, and allows user-defined print formats for custom forms, labels, etc. Add subsystems for additional capabilities. May be upgraded to AIDS-III when required.

MTC AIDS-II \$ 49.95
For Model II \$ 79.95

AIDS

CALCULATION SUBSYSTEM (CALCS)

MTC's most popular AIDS subsystem. Use for report generation involving basic manipulation of numeric data. Prints user-specified fields in titled, columnar report format, automatically generating column headings, paging and (optionally) indentation. Features full AIDS-III selection capabilities and can create a single report from multiple files. Provides the additional capabilities of user-specified balance forward computations, columnar subtotals, columnar totals and user-defined computations (allows multiplication, division, addition, and subtraction of field values and constants). Features may be used in combination. For example, the calculation of a user-defined quantity/cost column may simultaneously be listed by itself, used as part of a balance forward computation and as part of either (or both) a columnar subtotal or columnar total. Use for accounting, inventory, financial and other numeric-based information systems.

MTC CALCS \$ 24.95
For Model II \$ 39.95

MORE →
PRODUCTS ON PAGES 6 & 7


All products guaranteed for replacement only. Prices, Specifications & Offerings subject to change without notice.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

QUANTITY DISCOUNT INQUIRIES INVITED

WE ACCEPT
• VISA
• MASTER CHARGE
• CHECKS
• MONEY ORDERS
• C.O.D.


• Add \$2.50 for shipping & handling
• \$2.00 EXTRA for C.O.D.
• Ohio residents add 5½% sales tax.



TO ORDER CALL TOLL FREE
1-800-321-3552
IN OHIO call (216)289-7500 (COLLECT)

META TECHNOLOGIES CORPORATION

26111 Brush Avenue, Euclid, Ohio 44132



405 800627
TRS-80 and Radio Shack are registered trademarks of Tandy Corp

APPLICATION

- 86 On the Radio. Computers direct air time. *Don Hastings.*

GAMES

- 42 Swords and Sorcery. A contest with dragons and trolls. *Barry L. Adams.*
 50 Star Search. A bonus for Trekkies. *Howard Berenbon and Robert F. Gentile.*
 59 Star Fighter. 4K of heavenly battle. *Albert C. Farrarra.*
 62 Life in the Fast Lane. A hybrid of the game. *Terry Kepner.*
 68 U-Boat. Play and learn. *Hubert C. Borrmann.*
 76 A Heartbeat Away. Presidential simulation. *Clinton Morey.*
 84 Slot Machine. Personalizing games. *Stewart Fason.*

GENERAL

- 148 Rights of Passage. The upgrade to Model II. *Dan Keen and Dave Dischert.*

HARDWARE

- 136 300 Baud Terminal. Using unused ICs. *Timothy Loos.*

UTILITY

- 100 Tape Librarian. Tape management for micros. *Raymond J. Herold.*
 107 The Invisible Password. Keep your secret. *Michael A. Conley.*
 108 Slash Zero. Differentiate between zero and O. *Robert M. Richardson.*
 110 Code Cracker. Making and breaking codes. *James P. Morgan.*
 118 Software Lock. Limit access to subroutines. *M.D. Kelleher.*
 121 Lowercase with Strings. Soft approach to LC. *Milan D. Chapko, M.D.*
 122 Custom EDTASM. Modifications for your needs. *John T. Blair.*
 132 AUTOPOKE. BASIC approach to machine code. *Jasper E. Kump.*
 160 The Graphics Coder. Electronic video worksheet. *V. F. Racine.*
 164 Disk File Protection. Overwrite protection for TRSDOS 2.1. *Dan Keen and Dave Dischert.*
 170 Pencil RS232 Driver. Modifies Pencil for RS-232-C. *Dick Kinsey.*
 174 Cassette File. Locate dumps easily. *James Tallman.*

INTERFACE

- 116 Cheap Video. Interface for your television. *Paul C. Fowler, Jr.*
 152 PR-40 Printer Interface. Interface for a SWTPC. *John Hise.*

TUTORIAL

- 144 Towards Machine Language. The next logical step. *Allan S. Joffe.*
 166 Graphic Sort. Watch your 80 work. *C. A. de Zoysa.*
 178 Machine Code USR. Putting machine code inside BASIC. *Larry MacDonald.*

REVIEW

- 184 The TRS-80. For the neophyte. *Alexander MacLean.*

REGULARS

- | | |
|--|--|
| 8 80 Remarks. <i>Wayne Green.</i> | 31 80 Accountant. <i>Michael Tannenbaum.</i> |
| 12 Input. | 31 Edit 80. <i>Jim Perry.</i> |
| 18 Reviews. | 32 Inside 80. <i>Ed Juge.</i> |
| 24 The Assembly Line. <i>William Barden, Jr.</i> | 36 News. <i>Nancy Robertson.</i> |
| 28 80 Applications. <i>Dennis Kitz.</i> | 194 Advertisers' Index. |

Editor/Publisher
Wayne Green

Assistant Editor/Publisher
Jeff DeTray

Managing Editor
Jim Perry

Production Editor
Michael Comendul

Editorial Assistants
Emily Gibbs

Thomas Peabody
Nancy Robertson

Review Editor
Chris Brown

Production Manager
Noel Sell

Assistant Production Manager
Robin Sloan

Production

Steve Baldwin

James Butler

Tedd Cluff

Bob Drew

Bruce Hedin

Kenneth Jackson

Clare McCarthy

Michael Murphy

Dion Owens

Patrice Scribner

Sue Symonds

John White

Typesetting

Barbara Latti

Sara Bedell

Mary Kinzel

Karen Podzycki

Photography

Bill Heydolph

Terrie Anderson

Reese Fowler

Executive Vice President

Sherry Smythe

Corporate Controller

Alan Thulander

Executive Assistant

Leatrice O'Neill

Accounting Manager

Knud Keller

Circulation Manager

Debra Boudrieau

Circulation

Barbara Block

Pauline Johnstone

Bulk Sales Manager

Ginny Boudrieau

European Marketing

Reinhard Nedela

Australian Distributor

Rudi Hoess

Advertising

603-924-7138

Kevin Rushalko, Mgr.

Penny Brooks

Nancy Ciampa

Marcia Stone

Jerry Merrifield

Harold Stephens

Manuscripts are welcome at 80 Microcomputing, we will consider publication of any TRS-80 oriented material. Guidelines for budding authors are available, please send a self-addressed envelope and ask for "How to Write for 80 Microcomputing." All material to be published will be paid for upon acceptance by the Editor. Address all submissions for the attention of the Managing Editor. Entire contents copyright 1980 by 1001001 Inc. No part of this publication may be reprinted, or reproduced by any means, without prior written permission from the publisher. All programs are published for personal use only, and may not be reproduced for others. All rights reserved.

80 Microcomputing (ISSN # applied for) is published monthly by 1001001 Inc., 80 Pine Street, Peterborough, NH 03458. Application to mail second class postage rate is pending at Peterborough, NH 03458 and at additional mailing offices. Phone: 603-924-3873. Subscription rates in the U.S. are \$18 for one year and \$45 for three years. In Canada, \$20—one year only, U.S. funds. Foreign subscriptions (surface mail), \$28—one year only, U.S. funds. Foreign subscriptions (air mail), \$60—one year only, U.S. funds. In Europe please contact Monika Nedela, Markstr. 3, D-7778, Markdorf, W. Germany. In South Africa contact 80 Microcomputing, P.O. Box 782815, Sandton, S. Africa 2146. Australian Distributor: Electronic Concepts, Rudi Hoess, 55 Clarence Street, Sidney 2000, Australia. All U.S. subscription correspondence should be addressed to 80 Microcomputing, Subscription Department, P.O. Box 981, Farmingdale, NY 11737. Please include your address label with any correspondence. Postmaster: Send form #3579 to 80 Microcomputing, Subscription Services, P.O. Box 981, Farmingdale, NY 11737.



META TECHNOLOGIES



Fellow TRS-80 User:

I'd like to thank you for your continued interest in our products and tell you something about MTC's approach to marketing. MTC's marketing efforts are directed at several areas:

- **Market Expansion.** This is accomplished by increasing market coverage (more types of product) and by increasing market share (more people buying a given product). Unlike many of our smaller competitors, we tend to concentrate on fewer product areas, but in greater depth.
- **Product/Market Investigation.** When enough of our customers tell us they are interested in a particular type of product, we either create the product, or acquire it, to fill the need. Sometimes a product is created or acquired that fills a previously unrecognized need. It is Marketing's job to inform our customers of its existence and potential benefit.
- **Corporate/Product Promotion.** As in any business it is important that you, the customer, think of MTC, rather than our competitors, when you need diskettes, educational or other quality products. Our distinctive name and logo are part of a unique corporate identity. We use expensive ad space for "letters" to our fellow TRS-80 users because we think it is important that you know something about the people you buy from. We promote our products using a variety of means, including product reviews and announcements, enclosing product information sheets with all orders shipped, and direct mailings, along with our normal advertising. This month we are introducing our regularly featured Product Preview section as a means of informing you of new developments. We will also be publishing a newsletter, which will be sent to all our customers, featuring new product announcements, programming hints and tricks, product reviews, letters to the Editor, a customer response questionnaire and more.
- **Distribution Extension.** We are interested in increasing market exposure through coordination, not competition, by fostering a network of reputable dealers. For example, LTM Inc. offers the full line of MTC products and takes orders via toll-free phone calls and mail. They, however, advertise in other publications. In this way, each company maximizes its market penetration.

Next, let's look at who buys MTC products. Our customers typically fall into one of three groups. Most prominent is the businessman/hobbyist. He is relatively new to small computers, has some programming knowledge and is using a 48K, Model I with two disk drives. He wants to learn more about the machine and how to program it, but will buy a "solution" to a problem if it exists and is inexpensive. Second are Fortune 500 companies and governmental and educational organizations, such as school systems, major universities, and even the United States Army! The third group is the advanced hobbyist/computer professional. These customers buy our programming tools to save time. While not generally interested in educational products, they do purchase our AIDS systems in considerable quantities.

We specialize in products that use high technology and that solve problems for a broad class of users. They provide continual benefit and lasting value. That's why we don't offer game programs or specialty software (such as a \$200 concrete foundation cost estimation package for building contractors).

While the majority of our products are created by our technical staff, we are always interested in seeing quality work by others. We are especially interested in outstanding communications packages, educational products like REMASSEM and REMDISK, system-type software for Model II (such as BASIC extensions and machine code routines), hardware diagnostics packages and related programming tools.

We at MTC look forward to providing you with the quality products and service you deserve and should expect. If we offered you anything less, we wouldn't be Meta Technologies Corporation.

Sincerely,

Wendy K. Sayer
Wendy K. Sayer
Marketing

Apparat, Inc. introduces

NEWDOS/80

Apparat's long-awaited successor to NEWDOS+ is here! This is not an enhanced version of NEWDOS, but a completely new product. Simplified DOS commands can be instantly executed from BASIC, even within a program, without disturbing the resident code. System options, such as password protection, number and type of disk drives, BREAK key enable/disable and lowercase modification recognition, can be quickly and easily changed. Five new random-access file types allow record lengths of up to 4096 bytes, and no FIELDing! A powerful CHAIN facility allows keyboard INPUTs to be read from a disk file. An improved RENUMBER facility permits groups of statements to be relocated within program code. Diskettes may even be designated as RUN-ONLY! Features all NEWDOS+ utilities (SUPERZAP 3.0, etc.) and much more! One MTC technical staff member said having NEWDOS/80 is "better than sex" (you'll have to judge for yourself!). Includes 180-page instruction manual and MTC QUE card.

NEWDOS/80..... \$149.95
CALL REGARDING OUR NEWDOS+ UPGRADE PRICING.

★ PRODUCT PREVIEW ★

General Business System for Model II

This product will be a full-feature, professional-grade business system, with fully integrated General Ledger, Accounts Receivable and Accounts Payable. A Payroll subsystem will be added later. Some of the major features and facilities are:

- General Ledger can handle a chart of accounts having more than 1000 accounts and sub-accounts.
- User defines and controls the account number structure to suit his own needs.
- Transactions can be entered and stored up to the limit of available disk storage (typically more than 5000 on a multi-drive system).
- Accounts Payable and Accounts Receivable are fully integrated with the General Ledger.
- Extremely high-speed, machine code assisted sorting is used for reports, etc.
- Financial Reports are user-defined and formatted.
- Formats of customer statements (Accounts Receivable) and checks (Accounts Payable) are user-definable.

We are targeting for release of this product in early fall, 1980.

← **MORE**
PRODUCTS ON PAGE 4

mTc-SHIRTS

HIGH-QUALITY, POLY-COTTON BLEND T-SHIRTS. White with Navy Blue neck and sleeve "rings". MTC logo on sleeve. Top quality transfers of your choice on front.

Specify size (S, M, L, XL) and Transfer:

- META TECHNOLOGIES MAKES EVERY BYTE COUNT!
- DON'T TOUCH MY BITS!
01111110
- RAM it!
- MICRO LOVERS TAKE SMALLER BYTES!

mTc-SHIRTS..... \$5.95

MAILSORT(Model I)..... \$19.95

MAILSORT replaces existing sort in Radio Shack Disk Mailing List[®] system. Sort by any combination of fields, such as NAME, within CITY, within STATE. Hi-speed in-memory routine sorts 300 records in approximately 60 seconds. Minimum 32K recommended. For use with old or new versions.

PEEK&POKE..... \$14.95

Frustrated because PEEK and POKE have been removed from Model II BASIC? Satisfy your curiosity with PEEK&POKE from MTC. Included are B-bit and 16-bit (LSB, MSB) self-relocating machine language routines, instructions, and demo program.

Transfer PROGRAMS and DATA from MODEL I to MODEL II

TRAN-SEND

\$49⁹⁵ by MTC

Requires MODEL II and MODEL I with disk & RS-232. Simple to use, not a kit - nothing else to buy. Complete with custom cable, 5 1/4" & 8" floppies, instructions. May be used over phone lines. Custom Cable only..... \$19.95

Suitable for use with Radio Shack[®] transfer program(CT 0131)

MAKES EVERY BYTE COUNT

IN YOUR TRS-80® MODEL I OR MODEL II DISK SYSTEM

PROGRAMMING TOOLS

TDAM \$19.95
For Model II \$29.95
Includes MTC QUE Card!

Having trouble with RANDOM FILES? With MTC's Table-Driven Access Method (TDAM) you'll never fret over FIELDING again. No knowledge of random access files is required. Insert the TDAM "interpreter" into any BASIC program and type in a few DATA statements describing the information in your files. TDAM does the rest! Reads and writes fields and records of any type (even compresses a DATE field into 3 bytes!). Features automatic file buffer allocation/deallocation, memory buffering, sub-record blocking/deblocking, and handles up to 255 fields per record. Super fast and super simple! Complete with TDAM interpreter, instructions and demo program. Requires programming experience.

DIVERGE \$19.95
For Model II \$29.95
Compares two BASIC program files, showing the differences between them. Identifies & lists lines which have been inserted, deleted, & replaced. Use for version control.

REBUILD \$19.95
For Model II \$29.95
Reorganize programs for adding program code, faster execution, readability. Much more than simple renumbering. Rearrange groups of statements within a program - automatically updates references to line numbers. Use with SUPERSEDE and MINGLE for maximum effect.

Let Your TRS-80® Teach You ASSEMBLY LANGUAGE DISK I/O TECHNIQUES

REMISOFT does it again! REMDISK-1 is a concise, encapsulated supplement to REMASSEM-1. Package consists of two 45-minute lessons on audio cassettes, and display programs providing illustration and reinforcement. Provides specific track and sector I/O techniques, and sequential and random file access methods and routines.

REMDISK-1 \$29.95

SAVE Any 3,
\$49.95
For Model II \$74.95

SIFTER \$19.95
For Model II \$29.95
Twelve in-memory high-speed sorts for use in any BASIC program: stable, non-stable, with/without tags, for numeric or string data. Random File Sort included. Some sorts written in machine code. Includes sort subroutines, demo programs and instructions. Relocate as needed with REBUILD. Requires programming experience.

SHRINK \$19.95
For Model II \$29.95
Makes Every Byte Count! Make programs smaller and faster! Combines lines & removes unnecessary code including remarks, without altering program operation. Typically reduces program size 25% to 40%.

SUPERSEDE \$19.95
For Model II \$29.95
A "must have" for the professional programmer or the serious amateur. Probably one of the greatest time-savers available. Write programs in shorthand - change variable names - generate program documentation - use with REBUILD and MINGLE to build new programs from old ones.

MINGLE-II \$19.95
For Model II \$29.95
Merge up to 14 files (Program or Data) into a single file. Data files may be merged in ascending or descending sequence with the ordering based on a user-specified comparison field. A very handy utility for consolidating data files.

Let your TRS-80® Teach You ASSEMBLY LANGUAGE

REMISOFT's unique package, "INTRODUCTION TO TRS-80® ASSEMBLY PROGRAMMING" includes ten 45-minute lessons on audio cassettes, a display program for each lesson providing illustration & reinforcement, and a text book on TRS-80® Assembly Language Programming. Includes useful routines to access keyboard, video, printer and ROM. Requires 16K - Level II, Model I.

REMASSEM-1 \$69.95

Single sided, Single density, Soft-sectored

DISKETTES

Verbatim 5¼-inch

AUGUST
SPECIAL*

\$23⁹⁵ Box of 10

Quantity 10 Boxes \$23.50

Hard-sectored (10-hole), Box of 10 \$26.95

8-inch FLOPPIES

Single-density, Box of 10 \$29.95

Double-density, Box of 10 \$39.95

PLASTIC LIBRARY CASES

5¼-inch or 8-inch diskette case \$3.00

FACTORY FRESH, ABSOLUTELY FIRST QUALITY
Minimum order 1 box, NO order limit!

*Price in effect Aug. 1 through Aug. 31, 1980

Complete for Model I with all utilities
Plus exclusive MTC QUE card!

NEWDOS +
\$69⁹⁵ by Apparat

40 TRACK VERSION \$79.95

includes REF, RENUM, SUPERZAP, EDITOR/
ASSEM., DISASSEM., DIRCHECK, and more! This
is the original NEWDOS with all of Apparat's utility
programs. Includes exclusive MTC QUE (Quick User
Education) card.

MTC QUE Card only \$1.50

The perfect supplement for your NEWDOS+, from IJG, Inc. "TRS-80 DISK AND OTHER MYSTERIES"

by Harvard C. Pennington

132 pages written in PLAIN ENGLISH packed with
HOW TO information with details, examples and in-
depth explanations. Recover lost files and direc-
tories, remove file protection, make BASIC pro-
grams unlistable. How to use SUPERZAP, recover
from DOS errors and MORE!

TRS-80 DISK \$19.95


All products
guaranteed for
replacement only.
Prices, Specifications &
Offerings subject to
change without notice.

**MOST ORDERS
SHIPPED
WITHIN ONE
BUSINESS DAY**

**QUANTITY
DISCOUNT
INQUIRIES
INVITED**

WE ACCEPT
• VISA
• MASTER CHARGE
• CHECKS
• MONEY ORDERS
• C.O.D.

• Add \$2.50 for
shipping &
handling
• \$2.00 EXTRA
for C.O.D.
• Ohio residents
add 5½% sales tax.



TO ORDER CALL TOLL FREE
1-800-321-3552
IN OHIO call (216)289-7500 (COLLECT)

META TECHNOLOGIES CORPORATION

26111 Brush Avenue, Euclid, Ohio 44132



20

800627

TRS-80 and Radio Shack are registered
trademarks of Tandy Corp

80 REMARKS

by Wayne Green

*"... Radio Shack
would do better
if they were honest
with their customers and
didn't try to deceive them."*

Painful Fact of Life

You probably have people asking you, as a computer "expert," what system you recommend. It's a very difficult question to answer. Owners of TRS-80 systems are all too familiar with the many deficiencies of the system. Some get so excited over the lack of color that they buy Apple or CompuColor systems. Others want a system with more business support and go for a Cromemco or an MSI. The arguments are endless since all of the systems have both benefits and drawbacks.

The main benefit of the TRS-80 is one which Radio Shack can't even mention, yet it's the single benefit which makes the system the main one which can be honestly recommended for a newcomer to computing. This is the software support.

By virtue of the large number of Radio Shack stores—there are more Radio Shacks than there are McDonalds, believe it or not—plus their marketing and promotion savvy, there are more TRS-80 systems out there than everything else combined. Programmers, being aware of this situation, have tended to first write programs for sale to TRS-80 owners. Thus we find the situation where there are more programs for the 80 than for all other systems combined. We find not only quantity, but also better quality. The pressures of the marketplace are such that poor programs tend to fall by the wayside and the better ones survive.

Radio Shack can't advertise this because they are trying as hard as they can to keep this fact a secret from their customers. They don't want the TRS-80 buyers to know that there is anything more than their handful of mediocre programs available. These are the programs put out by Radio Shack and sold from their stores. Some might call this greed, others might term it practical business sense. That depends on whether you are working for Radio Shack or independently.

It is my belief that Radio Shack would do better if they were honest with their customers and didn't try to deceive them. But then, I'm certainly not above suspicion as far as having a personal interest is concerned.

It is a full time job just to try to keep up with the programs being released for the 80, much less try to evaluate them as to their usefulness and value. There are thousands of programs... thousands. From my experience at least 25 percent are worth buying and using. The rest extend from absolute rip-offs to stuff of minimal value, despite some very high prices. Buyer beware!

The Radio Shack owned stores are not al-

lowed to sell any products not made by Radio Shack... nor even let the customers know that such exist. No books or magazines which hint at outside sources are permitted to be sold in the stores.

Where this practice may all come home to roost will be when some other company spends the money to convert many TRS-80 programs to their own system and thus ends up with far more programs apparently available than Radio Shack is showing in their stores.

Gathering Strength

Oddly enough, though the Japanese have

*"They have built up
a bureaucracy
akin to that
in Washington..."*

been slow to get into this field, they are now gathering their strength, apparently backed by their government. It has been the Japanese who are the most understanding of the importance of software and who have been most serious in dealing with us about their support. They seem willing to spend whatever it takes to get programs to support their systems. Thus, while Radio Shack is trying to discourage software support, Japan is pushing for it. What will this mean in one or two years as far as equipment sales is concerned?

For the time being, considering the amount of software support for the TRS-80, it is difficult to recommend any other system for newcomers. Add in the splendid training courses available with the system, the dealer network and the growing service. In the long run the efforts by Radio Shack to prevent others from making money from the 80 may do them in, but, for now, they have things their own way.

The Tandy people should be a little more humble, for the TRS-80 went a long way toward saving the whole company. Lafayette started to get into computers and then dropped the ball. They went into bankruptcy. Radio Shack had many of the same problems: a disastrous drop in CB sales, a slowing of hi-fi sales, and a general drop in consumer electronics sales. Without the surge of business from the 80, the Tandy balance sheet could have turned red and their stock plummeted.

Radio Shack has a major problem that probably can't be solved. If you look at their finan-

cial reports you see that almost 50 percent of their expenses go for their management staff. They have built up a bureaucracy akin to that in Washington and such an overhead is very hard to ever cut down. I've talked with several friends at Ft. Worth and they assure me that the firm would run much better with less than half as many people. The Japanese firms are lean and mean, so they may be able to run rings around Radio Shack. The Japanese production lines are more automated, and their advertising and promotion is superb.

The next couple of years will be important. Either Radio Shack and the other American manufacturers will blunder into giving the market to Japan... or they will get their act together and win out. So far the blundering seems to be prevalent.

We're hearing rumblings from the Tandy folk about a couple of new systems to be announced in the near future. One is supposed to be an ultra low cost system (\$295?) which will probably be much like a Level 1, but with a modulator for using a TV set as a monitor.

Recent TV ads for black and white TV sets for around \$60 do tend to make this approach attractive. I don't think anyone can do more than dump inventory at a loss at those prices, so the ads may be more a reaction to the present recession and an attempt to raise cash from a dead inventory by a large firm than any hint of a general lowering of TV prices.

Digression

To digress (as usual), television sets do not make good monitors for computers. The problem has to do with the "el cheapo" circuits they build into bargain sets, plus the limitations of bandwidth between television channels. The wider the bandwidth of the i-f (intermediate frequency) of a set, the sharper will be the picture on the screen. This is the main difference between a computer monitor and a TV set—sharpness. This is why your screen is relatively fuzzy on your TRS-80. The monitor shipped with the system was originally designed for a TV set and modified.

The limited bandwidth of TV sets is one of the major drawbacks to the color systems such as the Apple. You'll be bumping into this, one of these days, when Tandy announces their TRS-80 Color.

There have been conflicting reports about Tandy changing over to a new microprocessor chip in the new system. The folks at Tandy deny this, but others point to very large orders for the Motorola 6809 chip as proof that the new TRS will be based on that, rather than the Z-80. My own reading of the entrails suggests that the Z-80 will stay and that the 6809 may be

SPECIAL DELIVERY with EXTRACT

A 100% Machine Language Word Processor

TRS-80® + Electric Pencil® or Radio Shack's Scretsit®

We can't stop improving and expanding the capabilities of your TRS-80®! By using SPECIAL DELIVERY with EXTRACT and either Electric Pencil® or Radio Shack's Scretsit® you can get even more out of your computer. From just one package, you will get all this:

MAILFORM: Create MAILFILE: The ONLY complete name and address list entry/editor program written in machine language. Instant search on any field, complete cursor control, just fill in the form!

MAILRITE: Print letters written with either the Electric Pencil® or Radio Shack's Scretsit® inserting information from a MAILFILE into the letter for personalizing and addressing. You can send a personalized letter to one person then a different personalized letter to a second person with true typist quality from your fine printer. Features: Indents, Underscore, Bold Type, End of Page Stop,

Address Envelopes, unlimited insertion from address list and More!

EXTRACT: Take out information from MAILFORM, the machine language mailing list. Find the names you need by Zip Code, Street Address, Gender, Age or any other way!

SORT: In-Memory sort on an entire address list using any field as the key. This program can sort an entire list in a matter of seconds!

LABEL: Prints labels from MAILFILE.

CONVERT: Make MAILFILE from RS mail list.

MOD II version available soon

SPECIAL DELIVERY will run on your TRS-80® with TRSDOS®, NEWDOS® or any other TRS®-like DOS.

If you bought SPECIAL DELIVERY from us, send us the disk and we will update it to include EXTRACT for \$25. If you haven't already taken advantage of our SPECIAL DELIVERY program, we'll send you the complete program including EXTRACT for just \$125 (Disk). We can also send you the Electric Pencil® for \$150.



✓ 42

Software Etc. . . .
1839 Chamberlain Drive
Carrollton, Texas 75007.
Phone Orders: (214) 492-0515

Demand a Demonstration from your local Dealer or write for a brochure of our complete line of fine software.

used to power an intelligent terminal such as a printer.

Too Simple?

While this magazine is aimed at the TRS-80 users, it is not solely for the beginner. Some articles may put off readers by being far too fundamental. On the other hand, some of the material is definitely for the advanced user and may, at first, be pretty puzzling. Have patience... it will sort itself out if you hang in there.

Articles Needed

We need more articles to help rank beginners understand computers. Perhaps, before you become so much of an expert that you have forgotten how to write in English, you can take the time to help those who are just starting down the road?

For instance, beginners would like to know about the various types of disk systems. I don't recall any definitive articles on them yet. A

good article would explain about formatted and unformatted disks, single and double density, single and double side, different sizes, Winchester technology, what a disk controller does. There should be good photo illustrations of the various disk systems and disks.

The Factory

While in Fort Worth talking with the Tandy people about Instant Software support, Sherry and I paid a visit to their TRS-80 plant. They have taken over a huge J.C. Penny store and converted it into a facility where they manufacture both the Model I and Model II systems. It is impressive.

Except for the monitor and the Model II power supply, everything seems to be made right there in Fort Worth. They stuff the circuit boards, run them through a wave soldering unit which solders everything at one time, clip off the wire ends, run a test and put them together. They test again, put them in their cabinets and

run even more tests. A good deal of their time and effort is spent on trying to make sure that the units will work when received. Despite all this, the first Model II received by us for test in New Hampshire didn't work.


Computers are fairly sturdy, but I sure hope they are able to come up with something better than a disk system for storage, for those are terribly delicate. Not much can happen to a computer board in shipment, but the disk units can get bent out of shape, as can the tube in the monitor. Say, how about a little gadget packed with each computer system carton which would indicate if the box had been subjected to more than a given number of G's of acceleration. These aren't too difficult to make and they could be sent back by the dealer after the unit had been delivered. This would put the onus for the damage to the unit on the carrier and thus tend to force them to emphasize to their workers that computers must not be kicked from a truck to the ground.

They have a completely automated testing

Continue to page 32



The system starts out with the CPU board being stuffed with chips and parts. Two boards at a time move along the production line.

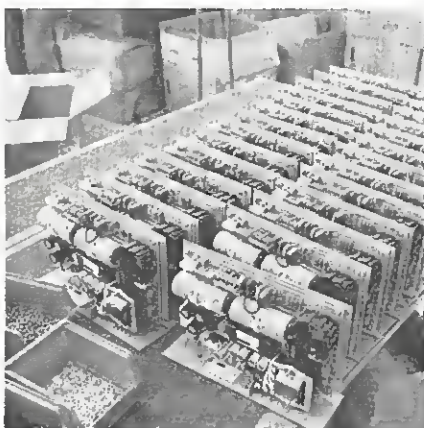

The power supply boards from Asia are unpacked and inspected.



The disk units are unpacked and inspected, then installed in the system.



Once stuffed, the boards are inspected to make sure all the parts are there... and in the right place.



The system now starts getting put together. The monitor units, at the left, have been unpacked and inspected. They are covered to prevent damage.



Next the system is inspected and then given a 24-hour burn-in under high temperature conditions. This is designed to aggravate parts failures over this critical test period.

clearly readable printouts clearly remarkable price

The \$625* Heathkit H14 Printer. You'll pay hundreds more for a printer with its features.

Where else can you buy a microprocessor-based printer with the H14's features and copy quality for under a thousand dollars?

The Heathkit H14 prints up to 165 characters per second, one full line every two seconds.

5 x 7 dot matrix and finest quality impact printhead give you clear, easy-to-read images.

All functions are microprocessor-controlled for reliable performance and more efficient use of your computer.

You get:


- Standard 96-character ASCII set—UPPER and lower case.
- Operator or software selectable line width: 132, 96 and 80 characters per line.
- Compatibility with any computer having RS-232C or 20 MA current loop serial interface with handshaking.
- Sprocket paper feed, with adjustable spacing, keeps paper moving smoothly.
- "Paper out" and "paper jammed" signals prevent loss of data.

- Selectable baud rates from 110 to 4800.
- Convenience of standard fan-fold paper, 2.5 to 9.5 inches wide.
- Chrome wire rack keeps paper neat.

Price includes connecting cables, paper rack and ribbon. Just add paper and you're ready to run. And service on the H14 is close by at any of 55 Heathkit Electronic Centers throughout the U.S.

Complete details on the remarkable H14 are in the newest, free Heathkit Catalog. Send for yours today or pick one up at your Heathkit Electronic Center.

"Whatever your computer, this printer is an excellent complement ...an excellent value."
— Creative Computing Magazine

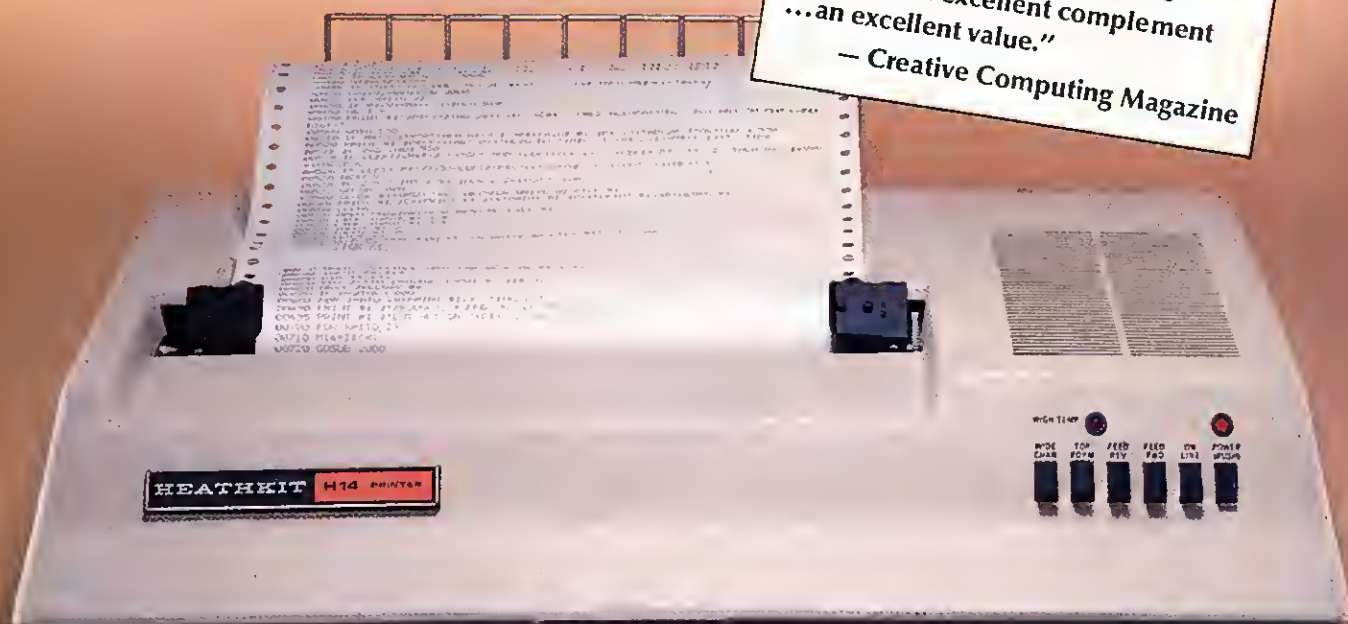

FREE CATALOG See the complete line of Heathkit Computer Products, including printers, video terminals, floppy disk systems and software, in the new, 104-page Heathkit Catalog. It describes nearly 400 exciting kits for your



home, work or pleasure — all at build-it-yourself savings. Send for yours today or pick one up at your Heathkit Electronic Center where Heathkit Products are displayed, sold and serviced. See your white pages for center nearest you.

*In kit form, F.O.B. Benton Harbor, MI. Also available completely assembled at \$895 F.O.B. Benton Harbor, MI. Prices are subject to change without notice.

†Units of Veritechnology Electronics Corporation

Heathkit®

Heath Company, Dept. 035-684, Benton Harbor, MI 49022

CP-181

80 INPUT

"... while experimenting with my Disk BASIC, I learned an interesting fact. It has to do with the execution times of FOR-NEXT loops."

Simple Interface

I am writing this letter in response to Peter Noeths' June article "Teletype Interface." He offers a circuit to run a model 33 teletype as a printer for the TRS-80. As Level II 16K owners, Mr. Cory Gates and I have a much faster and cheaper way of interfacing the model 33.

When Mr. Gates and I bought our ASR 33, we considered using a UART to transform from parallel to serial. Soon after buying the ASR 33, we met with a TRS-80 owner who has interfaced his ASR 33. Mr. Leon Hogan runs his 33 with a single open collector and RSM-2. Using RSM-2's TRS232 software, he runs at the 110 baud needed for the ASR 33. RSM-2 will output to the cassette latch in serial at any of six bauds.

Building the interface is a simple 30 minute job. First of all, open your keyboard. Solder a wire to the GND on J1 (power jack). This will supply the ground needed for the interface. Next solder a wire to the 74LS75 at pin 3. This chip is the cassette latch. Pin 3 is Q Prime or the data inverted and serves as your single line. Now tie this wire to the base of the transistor. This transistor serves two needs. It acts as an open collector to run the power supply and inverts the data to the normal state. After this, tie the emitter to the GND on the keyboard and the GND on the teletype. Last, but not least, the power. Tie the negative terminal to the collector and the positive terminal to the single on the teletype. To test the hardware just run this:

```
10 FOR I=1 TO 1000:OUT 255,2:NEXT
20 FOR I=1 TO 1000:OUT 255,0:NEXT:GOTO 10
```

The printer should lock and then unlock.

Now, all that is needed is the software. If you have RSM-2, run it and set the 'Y 1 0 1'. This will set the baud to 110 and line-feed after carriage return. To print with LPRINT and LLIST use this program:

```
7FB0: 21 B9 7F LD HL,7FB9
7FB3: 22 26 40 LD (4026),HL
7FB6: C3 19 1A JP 1A19
7FB9: 21 FF 7F LD HL,7FFF
7FBC: 34 INC (HL)
7FBD: AF XOR A
7FBE: CD E9 7F CALL 7FE9
7FC1: 59 LD E,C
7FC2: CD E4 7F CALL 7FE4
7FC5: 06 08 LD B,08
```

```
7FC7: 79 LD A,C
7FC8: 1F RRA
7FC9: 4F LD C,A
7FCA: D4 E4 7F CALL NC,7FE4
7FCD: DC E8 7F CALL C,7FE8
7FDD: 10 F5 DJNZ 7FC7
7FDE: AF XOR A
7FDF: D3 FF OUT FF
7FE0: 7B LD A,E
7FE1: FE 0D CP 0D
7FE2: 20 1A JR NZ,7FF4
7FE3: AF XOR A
7FE4: 32 FF 7F LD (7FFF),A
7FE5: 0E 0A LD C,0A
7FE6: 1E 00 LD E,00
7FE7: 18 D5 JR 7FB9
7FE8: 3E 01 LD A,01
7FE9: 18 01 JR 7FE9
7FEA: AF XOR A
7FEB: D3 FF OUT FF
7FEC: 21 6A 02 LD HL,026A
7FED: 2B DEC HL
7FEE: 7C LD A,H
7FEF: B5 OR L
7FF0: 20 FB JR NZ,7FEE
7FF1: C9 RET
7FF2: 3A FF 7F LD A,(7FFF)
7FF3: FE 46 LD 46
7FF4: C0 CP NZ
7FF5: 0E 00 LD C,0D
7FF6: 18 BB JR 7FB9
7FF7: 00 NOP
COMMAND?
```

Enter this program with TBUG and punch with 'P 7FB0 7FFF 7FB0 LISTER'. To use it, enter 32687 at memory size and load it with 'SYSTEM' and then 'L'. Execute with '/'. Now the printer commands will work. This program is written so you can relocate it using EDTASM with little work.

I hope that I have saved someone time and money.

Ray Nuber
Olathe, KS

Relative Time

Recently, while experimenting with my Disk BASIC, I learned an interesting fact. It has to do with the execution times of FOR-NEXT loops. Using the real-time clock I came up with the following relative times:

```
FOR I = 1 TO 32766: NEXT I (real) - 107 seconds
FOR I = 1 TO 32766: NEXT I (real) - 77 seconds
FOR I = 1 TO 32766: NEXT I (integer) - 76 seconds
FOR I = 1 TO 32766: NEXT I (integer) - 46 seconds
FOR I = 1 TO 32766%: NEXT I (integer) - 45 seconds
```

These times were for my Model I with an Expansion Interface. This seems to indicate that using just NEXT for each FOR-NEXT loop

can save a considerable amount of time. However, see the Level II manual page 4/10 (2nd ed - 4/12) for a warning on this usage as it relates to GOTOs.

I also noticed that using variables in an integer FOR-NEXT loop makes little or no difference for smaller loops. Try it on a loop less than 10000 using variables to define the range of the loop. This is because they are evaluated only once. See the manual for more details.

It is interesting that the manual makes no mention of this difference in speed in their section on speeding up execution. The jump from integer NEXT variable to integer NEXT saves almost as much time as the jump from reals to integers!

Richard Zeller
Mill Valley, CA

EDTASM Error

Thanks for publishing the EDTASM Index (June '80'). To me, it's this kind of useful article that really makes a magazine like *80 Microcomputing* worthwhile in the long run.

The author, Terry Kepner, also found three errors in the Editor/Assembler manual. I wish to point out another. On page 81, the description of the instruction BIT b, (HL) should read:

"... with the contents of the MEMORY LOCATION POINTED TO BY THE HL register pair ..."

In addition, the number "444" appears three times near the bottom of the page. In each case the number should be "4444."

Thank you, and keep those great issues coming.

Jeff Berkowitz
Isla Vista, CA

Good News

I am impressed with the new magazine. The content is excellent. Please work for careful review and proofreading of submitted programs and information. In the Feb. issue, for example, Wes Thielke gives some pointers for accessing the ROM routines. I tried his procedure for using the SET/RESET routine (Table 3), however I get a SN ERROR message and a return to BASIC after it has set a point. I have tried everything I can think of to solve the

problem. Can you help me out?

Good news for light pen builders. You can build the light pen described in the April issue ("Build a Light Pen" by Wayne Holder) using all Radio Shack parts. The circuit does not appear to be critical. Here is my list of parts:

PQ1: Phototransistor: RS# 276-130
Q1,Q2,Q3,Q4: PNP Transistor: RS#276-1604 (15 in one pkg)
R1: #271-025
R2: #272-061 (use in place of 2.4 meg).
R3: use two 2.2 meg resistors in series.
R4: #271-034
C1, C2: #272-1069
C3: #272-996

Although several substitutions have been made, this set of components works well. You will not be able to fit this into the pen, however. I built the amplifier circuit on a separate board. For the pen, I took a standard push-top ball-point, broke out the "push" mechanism, and installed the phototransistor at the point. You do not have to have the phototransistor flush with the point, it can be behind the point slightly; the sensitivity is excellent. The cost of the pen is greatly reduced, and if you have some friends you can divide the leftover 2N3906 transistors.

Roger A. Kendall
Lexington, MO.

Etch-a-Modification

In the May 1980 issue of *80 Microcomputing* James K. Shrum's "Etch-a-Screen" is an excellent drawing program.

At the end of his article he wrote, "Should anyone come up with any modifications I'd like to hear about them."

After working with the program, I found the following to be the ones I used most.

While drawing a racetrack, I discovered I had made a mistake. I then proceeded to push the break key and type RUN. This cleared the screen and returned me to the home position (O,O).

Why couldn't I have just pushed a key to clear the screen?

I added this line and it did the job and left me at my current position.

```
135 IF S = "C" THEN CLS: GOTO 30: 'clears the screen when  
you type "C".
```

While drawing a diagram of a pinball game I had a need to see where I was on the screen.

These lines show the values of X and Y, as they stand at the current position on your screen.

```
105 IF P = 1 PRINT @ 55,X;Y;
```

```
145 IF S = "P" THEN  
P = 1: GOTO 30: 'prints the current value of X,Y  
so you know where you are on  
the screen.
```

```
155 IF S = "Y" THEN  
P = 0: PRINT @  
55,CHR$(198);: GOTO  
30: 'turns off and erases position  
teller.
```

In a few cases I found myself wanting to start at the bottom-right hand corner.

Why can't we start or move to any place on the screen?

This line lets you input exactly where you want to go to or start.

```
165 IF S = "I" THEN  
PRINT @ 952;: INPUT  
X,Y: PRINT @ 952,  
CHR$(196);: GOTO 30: 'lets you set X and Y anyplace  
on the screen.
```

The above line also clears the bottom line of the screen.

These additions will fit in with your 4K machine provided that you remove all REM's.

Here is a list of all the commands possible for "Etch-a-Screen" if you enter my additions.

Type "D" before entering your command.
T - Puts you into the text mode.
S - Saves a drawing on cassette.
L - Lets you load a previously saved program.
New additions
C - Clears the screen and leaves you at your last position.
P - Prints the values of X and Y so you know where you are on the screen.
Y - Turns off the position teller.
I - Lets you input the values of X and Y which will move you to that position.

Thank you, James Shrum for such an excellent program.

Randy Long
Yorba Linda, CA

Small Corrections

A couple of small corrections will help the "MENUE" program in DOS to BASIC by Gary Alcorn in the 80 input section, May issue:

Memory location 6B20 becomes 1D8 (was E3)
Memory location 6B21 becomes 43 (was 03)

As well, it is possible to load a program of any size (not just 5 characters as stated). However, one must terminate with the two bytes 22, 0A.

The program will run as originally written under TRSDOS 2.3, but the key debounce will not work.

R. Hewko
Dawson Creek, B.C.,
Canada

Only 258 Bytes of Buffer

The last paragraph of page 115 of April's issue *should* state that the PRINT #1 statement writes no more than 248 bytes to tape. Remember that the TRS-80s I/O buffer (extending

from addresses 16870 to 17128) is only 258 bytes long, and a few bytes are needed for housekeeping purposes.

The BREAK DISABLE article on page 128 contained two errors. Change line 10 to read

```
10 CLS: FOR X = 32743 TO 32767
```

Delete the last ,0 from the DATA statement, which is redundant.

Finally, how about getting Dennis Kitz to provide us with an assembly language version of KBEEFIX so that users can reassemble it with a different starting address. There was no indication that the program was relocatable. Right now KBEEFIX conflicts with other programs.

John Blommers
Edmonton, Canada

80AID

Free Info

I think the following information to your readers concerning Computer Bulletin Boards will save you and Radio Shack a number of phone calls.

I think the evolution of Forum-80 systems are the best thing that could have happened to the computer hobbyist. The article in the May issue of *80 Microcomputing* by Jim Cambron was excellent.

I would like to add that if you do not disable the parity error routine before calling a system, you will always get vertical lines between the characters the system sends.

If you don't know how to disable the patch, send me a blank cassette and an S.A.S.E. and I will copy mine for you.

Steve Maguire
12 Suburban Blvd
Delran, NJ 08075

HELP

As an owner of TRS-80 with interface and disks, I have a problem that I'm sure many others also have.

When the TRS-80 is on, it makes interference not only on my CB-radio base station, but also on the surrounding stations. Is there anything to do about that?

I hope to get help from you or some of your readers to solve this problem.

Per Evensen
Tingvallavägen 8
S- 186 00 VALLENTUNA
Sweden

Several weeks ago, *80 Microcomputing* received the following letter from one of our readers. As you will see, the letter from Computronics, Inc. suggests that Delmer Hinrichs, author of the well-received "BASIC Word Processor" that ran in May 80, had based his work on ground already broken by Dr. Hubert S. Howe.

80 Microcomputing asked Mr. Hinrichs for some clarification. There was never any assertion, as Mr. Hinrichs interprets of plagiarism, but rather, *80 Microcomputing* thought a footnote might be appropriate.

Mr. Hinrichs response surprised even our managing editor, who, upon review, agrees with Mr. Hinrichs.

Mr. Hinrichs letter, somewhat abridged, follows.—Eds.

Asserts a "Rehash"

I am in total agreement with your comments in the May, 1980 issues of *80 Microcomputing* pertaining to copying software. What about almost copying software?

Pages 50-55 of *80 Microcomputing* contain an article called "BASIC Word Processor." The article and the program itself is a "rehash" of what first appeared in our H & E Computronics, Inc. Monthly Newsmagazine. The program uses identical variables and identical commands (with sufficient modifications to get around the copyright laws). The article accompanying the program even uses our eight basic features that appeared in the article accompanying our program.

The article and program appearing in *80 Microcomputing* is probably sufficiently different to avoid prosecution under the copyright laws (although we wouldn't be interested in following that course). We would like *80 Microcomputing* to acknowledge the original source for the material. We are certainly happy (and pleased) to give *80 Microcomputing* the rights to publish anything that comes from our Newsmagazine. We would just like *80 Microcomputing* to give us proper credit and ask for prior permission.

By the way, The Word Processor is the program that we have been giving away (at no charge) with each subscription. The original version appeared in our April, 1979 issue. The updated version appeared in our April, 1980 issue (both enclosed).

Keep up the good work. I know that it is impossible to find the original source for everything being written.

By the way, our word processor is selling for \$99 by a company in Florida (without our permission). People are very angry when they find out that we give it away for free. We have the rights to unlimited free distribution. The Word Processor was written by Dr. Hubert S. Howe, Jr.

Howard Y. Gosman, President
H & E Computronics, Inc.

Surprising Rebuttal

I was very surprised to receive your letter and the copy of Mr. Gosman's letter, in which he claimed that my article/program, "BASIC Word Processor", published in the May 1980 issue of *80 Microcomputing*, was a "rehash" of Dr. Howe's article/program published in the April 1979 issue of *Computronics*. I had seen and tried Dr. Howe's program, along with several other BASIC word processors, but had found that none were satisfactory (Dr. Howe's program I found too slow, lacking features that I felt were necessary, and insufficiently debugged). I thought, "I can do better" and decided to write my own program.

"Program plagiarism is a serious charge ... bear with me"

It was a number of months after I had last looked at Dr. Howe's excellent write-up of a mediocre program that I got around to writing up my program. After receiving your letter, I again looked at Dr. Howe's article. Yes, we do organize things similarly: We first list features, then operation in general, then operation in detail. While this is a natural way to organize an article, perhaps Dr. Howe's earlier article had left its impression.

We both list eight features, a startling coincidence. However, five are descriptions, in different words, of features that any good BASIC word processor should have; three are different.

Actually, even features that sound the same may be different. For example, we both claim, in different words, upper and lowercase text entry using an unmodified TRS-80. Reading further, you find that with my program, (shift-letter) gives uppercase, and (letter) gives lowercase, the same as a typewriter. With Dr. Howe's program, (shift-letter) gives lower case, and (letter) gives uppercase, very awkward for entering normal text.

Program plagiarism is a serious charge, so please bear with me. The following comparisons are based on only Dr. Howe's April 1979 program; I have not seen the April 1980 updated version that Mr. Gosman mentions, so I cannot comment on the revised program.

Program Features

Do the programs have different features? I think so. While some features appear

duplicated, most actually work quite differently.

My program has the **COMPILE** command, my term for the command to move words between lines to make all lines the correct length. I think that this feature is essential for a practical word processor; otherwise, if lines are made too short or too long by **EDITing** or **reFORMATing**, many lines may have to be manually changed or even retyped. Dr. Howe's program does not have anything similar.

My program allows entry of do-not-justify markers to skip justifying of any line; his does not. Mine displays this marker, as well as end-of-page and trailing-space markers on the video; his does not show any such special markers. My program has subcommands for moving the text in a line to the extreme right of the line, of centering it; his does not. Mine shows on the video display what the program is doing during time-consuming operations; his does not. Other non-shared features are mentioned below.

Dr. Howe's program does have one feature that mine lacks; the ability to store text in a disk file.

Program Organization

Are the programs organized in a similar fashion? I think not. Mine puts the commands in alphabetical order; his does not. For logic branches, I tend to use the ASCII number of the character, and use **ON—GOTO** for multiple branches; he uses string characters and groups of IFs. I try to protect against user errors; he does less checking. I try to put subroutines after the calling point; he puts them wherever convenient. I display the text after it has been changed; he does not. I use string variables "Y" and "N" for yes-no questions; he uses numeric variables.

We do both compress the spaces out of our respective programs to save memory.

Program Commands

Dr. Howe has 14 commands in his program; I have 17. Of these, ten have the same name, and thus appear the same at first glance. Actually, only three, **DELETE**, **HELP**, and **MOVE** have essentially the same effect, and even on these, the BASIC code is different. On the others:

EDIT—We have both more or less followed the Level II editing format. Dr. Howe leaves out the **Again** subcommand and the "n" preceding the left-arrow, right-arrow, Space, Change, Delete, and Search subcommands. I added subcommands shift-right-arrow (move text to right), shift-down-arrow (center text), and shift-@ (exit from EDIT).

INSERT—Dr. Howe **INSERTs** text only into empty lines; I move the following text down to make room for the new text line or lines.

JUSTIFY—Dr. Howe's program will
Continued on next page

How's your love life?

A little dull around the edges?
Routine? Predictable? Boring? Maybe
all it needs is a little Interlude. Interlude is
the most stimulating computer game ever conceived.
It combines a computer interview, an innovative
programming concept, and a one-of-a-kind manual to
turn your love life into exciting, adventurous, delicious fun!

Interlude is: romantic ... playful ... outrageous ... a fantasy. Interlude is: ■ Wet fun on a hot summer night. (Interlude #21) ■ A surprise on the way home from dinner. (Interlude #42) ■ A bubble bath that ends with a bang. (Interlude #78) ■ An evening to rest while she does all the 'work.' (Interlude #25) ■ The most romantic of evenings. (Interlude #84) ■ A new twist to an old subject. (Interlude #69) ■ Just watching her. (Interlude #57) ■ An erotic fantasy! (Interlude #33)

With over 100 Interludes, you can satisfy all levels of interest and desire. Each Interlude is fully described in the manual, and the more elaborate ones are detailed with regard to settings, props, and mood-enhancing techniques. But we've saved a few super Interludes for that very special time when your interview indicates you're ready! At that time, you will be introduced to one of several Interludes held secret within the computer. (When you learn secret Interlude #99, your love life may never be the same again!) Interlude can give you experiences you'll never forget. Are you ready for it?

InterludeTM
The Ultimate Experience.

Interlude, 10428 Westpark, Houston, Texas 77042 I'm really ready! Rush me _____ copies of Interlude today.

☐ For the Apple II (16K) # ☐ For the TRS-80 (Level II-16K) ## ☐ \$14.95 for cassette ☐ \$17.95 for diskette.

Add \$1.50 for shipping. Texas residents add 6% sales tax. My check (payable to Interlude) is enclosed. ☐

*Charge my ☐ MASTERCARD ☐ VISA account.

Account No. _____

Expiration date _____

All charge customers must sign.

Signature _____

Name _____

Age _____

Address _____

City _____

State _____

Zip _____

*CHARGE CUSTOMERS: Order by phone toll-free! **1-800-327-9009 Ext. 306**

(FLA: 1-800-432-7999 EXT. 306)

Apple II is a registered trademark of Apple Computers, Inc. ## TRS-80 is a registered trademark of Radio Shack, a Tandy Co.

Hinrichs from page 14

not right-justify lines that end with a space or punctuation; mine will. With my program, a marker is added to a line to leave it unchanged; his does not have this option. Dr. Howe can't JUSTIFY short lines; I can. The actual adding of spaces is quite different; I start at a random position and distribute added spaces uniformly, at adjacent or alternate original spaces; Dr. Howe doesn't.

LOAD—Delimiters (" , :) or leading spaces that may occur in text cannot be SAVED and LOADED from tape. Both Dr. Howe and I got around this problem by translation, adding an eighth bit to the seven-bit ASCII code (by adding 128). Dr. Howe tests for the problem characters, and changes them in the text file before and after a SAVE, and after a LOAD; he then SAVES or LOADS one text line at a time. I translate all characters, put them into a buffer array, then SAVE or LOAD four lines at a time. The practical difference? A lot of time and tape. My translation is much faster, no re-translation is needed after a SAVE, and there are only one-fourth as many data files to record or read.

PRINT—In Dr. Howe's program, PRINT may mean either print on the printer, or display on the video display; in mine, PRINT means PRINT. My program can set the left margin, print page numbers on all pages except the first, print the entire text without intervention, and print text with line numbers without offsets to the text; Dr. Howe's cannot.

REPLACE—Dr. Howe's REPLACE must start at a line that contains text, but can then continue in blank lines. In my REPLACE, only one line, with or without text, is affected.

SAVE—See LOAD.

ADD is similar to Dr. Howe's FILL, but adds a single character to the text file quicker, besides correcting the upper-lowercase reversal, which Dr. Howe's program does not do. My program moves a too-long word to the next line much faster than does Dr. Howe's program. If a word ends on the last position of a line and (space) is then entered, Dr. Howe's program incorrectly moves the word to the next line; mine does not. In my program, shift-right-arrow moves text to the extreme right of the line; in Dr. Howe's, it fills the line with spaces.

FORMAT is similar to Dr. Howe's SET, but has 10 format variables, compared to only six for SET.

I could continue listing differences until this letter was longer than my original article, but I think that the conclusion is obvious from this sampling: While there is a superficial resemblance, due to the two programs having a common goal, the actual features and the detailed operation of the programs are quite different.

Delmer D. Hinrichs
Washougal, WA

DEBUg

Bugs in Doodle Bug

Due to a lapse in communication between myself and the editors at the last minute when the June 1980 issue of *80 Microcomputing* went to press, the line numbers used for reference in my article "Doodle Bug" do not correspond to the line numbers in the actual program listing. The table below provides the corrections that need to be made to the text portion of this article, starting on page 74. The corrections are listed in the order that they appear in the text.

Line numbers referenced in text of article:	Corrections to text so that line numbers will correspond to program listing:
p. 74 300-385	265-350
500-585	410-485
RUN 400	RUN 355
400	355
300	265
RUN 600	RUN 490
p. 76 435, 445, 660 and 665	390, 400, 575 and 580
999	595
110	165
116 and 220	175 and 225
GOTO 115	GOTO 170
GOTO 220	GOTO 225
215	220
GOSUB 999	GOSUB 595
65	105
35	75
125 and 260	185 and 255
430 and 450 (disk)	395 and 405 (disk)
657 and 680 (cassette)	575 and 590 (cassette)
RUN 400	RUN 355
RUN 600	RUN 490

R. Daniel Bishop
Point Lookout, MO 65726

Life Re-Lived

Readers will have noticed by now some missing items from two programs in the LIFE article published in June 80. Here they are:

In Listing 6 there should be no line 15. That is actually *selection* 15 in line 2010 (you wondered where that went? Well score one for automation). Also, line 3100 was swept up from the floor, I suppose. As many readers have deduced, line 3100 should read GOSUB 9999.

Now the assembly listing of LIFE itself. Lines 245 and 265 now read *LIST OFF and *LIST ON. Instead, these lines should be dropped and lines 250 and 260 added, reading:

```
250 DEFN "LOADING LIFE9 ..... WAIT FOR
"GOOD LOAD"
260 DEFN ".....THEN ENTER "/"
```

I suppose an overanxious accountant sliced out lines 6450 and 6460. They originally read:

```
6450 COPY DEFN ". COPYRIGHT 1979 BY DENNIS
BATHORY KITSZ."
6460 "ALL RIGHTS RESERVED."
```

...but you are welcome to place any 64-character message in that place.

I would also like to mention that for those readers without the patience to type in the complete listings, I have prepared LIFE9 on cassette, along with the BASIC seed listing, for \$9.

Dennis Bathory Kitsz
Roxbury, Vermont 05669

SCRNPRNT

I thoroughly enjoyed "Screenprint" in the May 1980 issue, but found a bug in the listing. Line 194 should be:

```
LD (4049H), HL
```

H was left out in the assembly (look at the object code). Otherwise SCRNPRT is working faithfully.

John Sowers
Petersburg, VA

Roseland Re-visited

In the article "Adventures in Roseland" (June, 80), the program listing was incorrect.

Lines 40, 50 and 60 should have read:

```
40 X=(R*(COS(J))+64
50 Y=(R*(SIN(J))+47
60 SET(X,47-(Y/2))
```

Donald E. Edwards
Royal Oak, MI

EXATRON STRINGY FLOPPYTM

**SPEED
LOW COST
RELIABILITY**

Exatron is a California based corporation that has been in business since 1974. As well as the Stringy Floppy, Exatron designs, manufactures and sells state-of-the-art electro-mechanical equipment for a variety of commercial and industrial applications. Exatron is an established supplier of automatic test equipment to manufacturers, and large OEM users, of integrated circuits worldwide.

The software in every ESF adds a parity bit to every byte saved on tape, and a checksum to the end of every file. These are checked both after recording data and upon replay, any detected error is indicated by a message on the video display. This system of automatic error checking gives confidence in any data saved, also each wafer is rated for at least 2,000 complete passes past the record/replay head.

- ▶ Assembled and tested
- ▶ All operating software in ROM
- ▶ Fully automatic operation
- ▶ Professional quality
- ▶ No Expansion Interface required
- ▶ Large Owners Association
- ▶ High speed operation
- ▶ Extremely reliable
- ▶ No technical knowledge needed

WHAT IS IT?

The Exatron Stringy Floppy (ESF) is an extremely fast, reliable, economical alternative to cassette or floppy disk storage of computer programs or data.


Totally self-contained, the ESF has no buttons, switches, knobs or levers to adjust or forget. All of ESF's operations are under the computer's control.

HOW DOES IT WORK?

The ESF uses a miniature tape cartridge (called a 'wafer') as the data storage medium, about the size of a business card and 3/16th of an inch thick. The tape used inside the wafer is a special Mylar based Chrome Dioxide type, specially developed for digital applications. Wafers are available in several lengths, 5 feet being the smallest and capable of holding up to 4 thousand bytes of information — the 75-foot wafer is the largest available and can hold up to 64 thousand bytes of data.

The wafers contain a single reel of the special tape connected as a continuous loop, the ends being spliced together with a piece of reflective tape. In operation the ESF drive unit pulls the tape from the center of the reel inside the wafer, causing the entire reel to rotate. Thus, the tape automatically winds itself around the outside of the reel at the same rate as which it is pulled from the center. This process is similar to that found in an 8-track cartridge.

The ESF transport mechanism is very simple, consisting of a precision die-cast aluminum block — with a capstan, drive motor and magnetic record/replay head mounted on it. The wafer loads into a slot in the casting (it will only fit the correct way) and the tape is driven at a single point by the capstan, past the record/replay head.

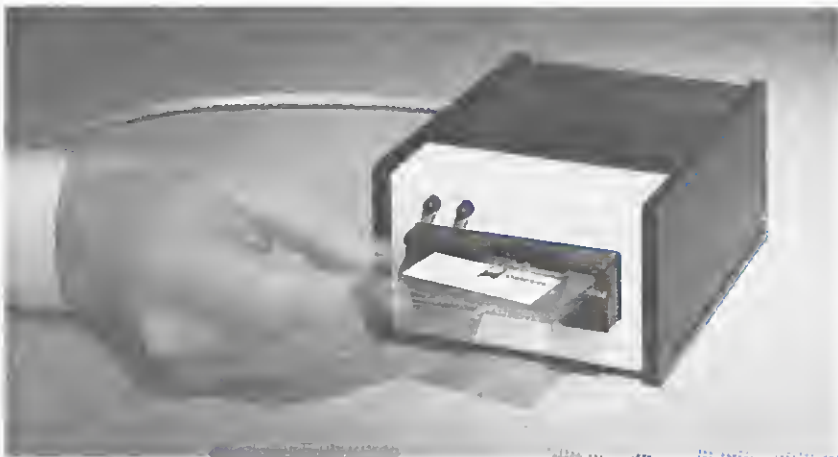

HOW DO YOU USE IT?

Once connected to your computer the ESF operating system needs to be activated — simple. Just type 'SYSTEM'(enter), and in response to the ? prompt type '12345'(enter). Your TRS-80 will instantly display the ESF sign on message 'EXATRON STRINGY FLOPPY VERSION 4.1', and from this point onwards you will have the extra commands '@LOAD', '@SAVE' and '@NEW' recognized by your TRS-80.

The ESF's operating system is built into the electronics of the unit, in much the same way that BASIC is built into the computer, so it is always available — the SYSTEM command is to let your computer know that the ESF has been connected. If you normally reserve some memory for subroutines then the ESF software will relocate itself under your selected top of memory. The ESF uses only 4 bytes of your available RAM, these bytes are used to 'point' to the 2048 bytes of software in the ESF unit itself.

WHAT'S THE CATCH?

Well, the only catch that most people find is that they have to actually pay Exatron for their unit! Even this is no big deal.

Starter Kits are available with the Exatron Stringy Floppy, a supply of wafers, a bus extender and a selection of useful programs — for \$299.50.

Through regular advertisements in both Kilobaud Microcomputing and 80 Microcomputing, owners are kept informed of the latest developments in wafer-based software. Plus hundreds of user 'workshops' are starting up over the country, so you can always be sure of being near to another ESF owner.

Exatron also gives a 30-day full money-back guarantee, with a 1 year parts and labor warranty on the unit.

If you have any questions about the ESF then give Exatron a call on the Hot Line (outside CA) 800-538-8559.

East Coast customers can call 800-343-4424 (inside MA 617-899-3862)

Open House Workshops take place from 9 am till 1 pm every Saturday at Exatron's factory in Santa Clara, and on the East Coast the last Saturday in each month at Micro Communications, 80 Bacon Street, Waltham MA 02154. All are welcome.

exatron


3555 Ryder Street
Santa Clara, CA 95051
408-737-7111

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

REVIEWS

"I realized the time I was saving... was lost ... in the amount of time spent typing reports from the video display."

HARDWARE

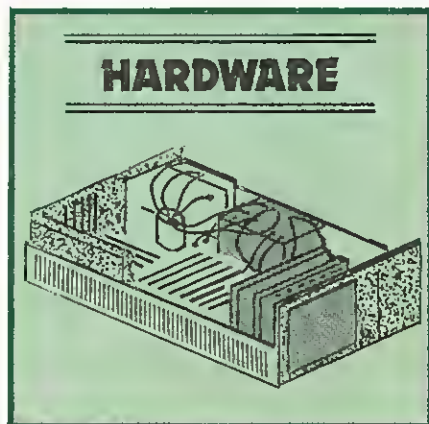

Trendcom 100 Printer
Trendcom
Sunnyvale, CA
\$375

by John D. Adams

I have no idea what one does with a wire wrapping tool. I find PC boards artistically attractive but regard their operation with puzzled awe. The mere idea of a logic probe sends me to the liquor cabinet. But I do love my computer. I am one of those computer users who really is a user.

I have owned my TRS-80 for over a year and a half, have dutifully learned my Level II BASIC and expanded my RAM to 16K. I am now writing software which occasionally astounds me by working. As a teacher of Algebra II and Accounting, using my TRS-80 has increased exponentially during those 20 months.

Time Saved, Time Lost

Several months ago, I realized that the time I was saving by using a computer was lost twofold in the amount of time spent typing reports from the video display. I was losing my eyesight, my patience and my sanity. It was clearly time for hard copy, and I had to have a printer that I could plug in and run.

My first forays were frustrating and disappointing. I found a lot of decent printers for around a thousand bucks, but I couldn't afford them and support the government and my family at the same time. Besides, I could not see paying more for a printer than I did for my entire system.

I had nearly resigned myself to several years more of typing from the video until I could save up a thousand dollars—provided the car did not fall apart on the freeway—when I tried a

local computer store looking for a used printer. There, a salesman demonstrated the Trendcom 100 printer. He gave me a program listing to check on the copier and said he had an interface cable that plugged directly into the TRS-80.

I went home to think about it. The listing copied fine—it even made a good ditto master on a thermal copier. I called a second computer store for their opinion and got no negative feedback.

So I bought one. With foreboding, of course. Things that work well for everyone else seldom work for me. The manual is short, concise and clear. A separate page concerning TRS-80 applications is included.

Inside the cabinet is a slide switch that activates a self-check routine and prints out the 96 character set, illustrating both upper and lowercase. The manual states that if this works, you should hook it up.

One end of the ribbon cable is furnished with an interface card housed in a black plastic box about 3½" by 5" by ¾". I was told that this is for systems without the expansion interface. I had some trouble figuring out which was the top of the box, but finally realized that it could go only one way and still leave access to the reset button. This is a fair indication of my electronics expertise.

The other end of the cable plugs into the printer and is notched; not even I could get it in backwards. Hook up the cable, plug the power cord into a grounded receptacle, and you are ready to go. The power supply is included inside the printer case.

Bi-directional Printer

The unit's weight will surprise you. It is a microprocessor-controlled, bidirectional printer. It prints a 40 character line at 40 characters a second. Trendcom projects the head life at 10⁸ characters. The warranty is satisfactory, and the salesman assured me that repair support is available. Interface cables are also available for

the Apple II, the PET and for RS232 applications.

It is refreshingly quiet, making sound only when the print head changes direction and advances the paper. Loading is easy, and the paper feed is even and regular. Operation requires only the LLIST and LPRINT commands. The PRINT USING and the PRINT TAB statements may be used, making formatted output a snap.

The Trendcom even prints upper and lowercase without a TRS-80 hardware modification by reversing the normal shift procedure. Lowercase is not a prize winner, but it is readable and offers contrast.

The drawbacks for me are few and minor. The printer uses thermal paper in blue or black at about four cents per foot, which is not cheap. Unless you do a great deal of printing, this should not be critical. The paper is also narrow, measuring slightly less than 4½ inches and cannot be exposed to sunlight or heat.

A small LED on the front panel to indicate power on/off status would be handy.

So far I have not been able to get the printer to print an up arrow for exponentiation. It prints an open bracket sign instead. Using the CHR\$(91) notation does not help. If anyone knows how to get around this, I would appreciate hearing from you.

Two self-protecting circuits are built in. The first resets the unit when line voltage drops below 90 percent of the rated needs. Operation resumes automatically when power is up again. The second circuit locks if the print head does not return to the left margin. This is cleared by turning the power off and then on again.

I am completely satisfied with the Trendcom 100, especially considering that my cash outlay was over \$100 less than I would have spent on the Radio Shack Quick Printer. For someone with my computer budget and my computer needs, the Trendcom 100, like the TRS-80 itself, is ideal. ■

DECEMBER 5	-63	-100	91
DECEMBER 6	-82	-97	97
DECEMBER 7	-94	-90	100
DECEMBER 8	-100	-78	99
DECEMBER 9	-98	-62	94
DECEMBER 10	-89	-43	87
DECEMBER 11	-73	-22	76

Sample Listing from the Trendcom 100.

Okay, now you've had a chance to see what I have in mind for you with **80 MICROCOMPUTING**. Oh, I admit that we're just getting started and that the magazine will be improving a lot as we go along. We have some interesting ideas in the works for you.

With the TRS-80* (or 90... etc.) being the most popular microcomputer in the entire world, you are going to benefit from this in many ways. The more computers there are out there of one kind... the more good programs you are going to have for this system. I hope that is obvious. You may be sure that **80 MICROCOMPUTING** will be packed with the shorter programs and reviews of the larger ones. You can waste an awful lot of money on stuff that looks great in the ads, but fizzles out when you try to use it. You need our reviews.

The wealth of programs will also mean that there will be much better programs for the TRS-80* than any other system. Put yourself in the seat of a computer programmer and you'll understand this. If you are going to spend several months developing a comprehensive program, and it takes all of that to write and debug a big program, would you write it for a system which has sold one hundred units or one which has sold over 300,000 systems? The answer is obvious... and this is why we are already seeing programs coming out for the TRS-80* which are far better than anything for any other system on the market. This is tough for other systems... the law of the computer jungle.

Between our connections with Instant Software, the largest publisher of microcomputer programs in the world, and Kilobaud MICROCOMPUTING, you know that **80 MICROCOMPUTING** is going to be your most important link with software for the TRS-80*.

With Instant Software being sold and promoted in every country in the world where the TRS-80* is being sold, our input of programs is also the best in the world. We get programs submitted from everywhere... often from 50 to 100 a week! You'll get the cream of the crop either published or reviewed in **80**.

*TRS-80 is a trademark of Tandy Corp.

HARDWARE TOO

The same law of the computer jungle holds for hardware. Would you, as a manufacturer, market an accessory for a system which has sold 100 units or would you go first for the one which has sold hundreds of thousands. It is, as with software, self-evident why the great bulk of the hardware accessories for computers are for the TRS-80* these days.

80 MICROCOMPUTING has the advantage of the use of the largest and most complete microcomputer lab in the world... the one developed for Instant Software and Kilobaud MICROCOMPUTING. This means that most new pieces of equipment are tested and in use by our staff... and this means that we can tell you what we think is outstanding... and where we find ripoffs. This lab is important to you.

SUBSCRIBE

If you are not already a subscriber to **80 MICROCOMPUTING**, please get signed up right now. The yearly rates are \$18, and that is a bargain. Just one single program of use to you can be worth much more than that. One review of an accessory could save you many times that much investment. I would appreciate it if you would appoint yourself a committee of one to get more subscribers for the magazine. You will benefit even more than we do here at the magazine... because the more readers we have, the more ads we will be able to attract... and the more ads, the more

DO YOU OWN A TRS-80*?

THEN READ ON.



pages of articles you will get every month.

The **80** market can, I think, support a couple of hundred pages of ads... and that would mean a magazine of nearly 500 pages a month. That should hold you. You may not have time left to use your computer.

ENCYCLOPEDIA

If you've read Kilobaud MICROCOMPUTING, you know that I try hard not to duplicate published material. My concept is that every reader should save every issue (we sell inexpensive boxes for this so they can sit on your library shelf) and treat the magazine as a continuing encyclopedia of computing. I make sure that much of the material in each issue is written in simple language so it will be understandable by even the rawest newcomer to computers. Oh, I have articles for the more advanced users too, so you'll have something to look back over later and use as your understanding of your system grows.

Try to think of **80 MICROCOMPUTING** as more of a large club newsletter than an ivory tower high-level publication. I'll

leave the pomp to other publishers... the ones with the well-deserved inferiority complexes who cater to their inadequacies by publishing esoteric baloney. This magazine is written by the readers and edited by people whose aim is to help you enjoy your TRS-80*.

SAVE

With each issue costing \$2.50 at your computer store, that's \$30 a year. For \$18 a year you can subscribe... at least for now. As the magazine expands, please do not be surprised if the cover price increases, along with the subscription price. I started **73 Magazine** for radio amateurs twenty years ago with a cover price of 37¢ (two for 73¢) and it is up to \$2.95 a copy now (and it is the largest of the ham magazines).

For you bargain hunters... and those who find that one year goes by all too rapidly, the three year rate for **80** is \$45. This, too, will be going up... reflecting the inflation, paper increases, postage increases, and a short vacation for me in Hong Kong next year. Someone has to pay for that.

If the coupon below has been used, please fill out subscription form on the Reader Service card in the back of the magazine.

YES! Sign me on as a subscriber to 80 Microcomputing for only \$18 a year!

Card # _____ Exp. _____

Signature _____

Name _____

Address _____


City _____ State _____ Zip _____

- ☐ 12 issues — \$18
- ☐ 36 issues — \$45
- ☐ Please bill me
- ☐ Payment Enclosed
- ☐ Master Charge
- ☐ VISA
- ☐ American Express

80 microcomputing T.V.
Peterborough, N.H. 03458

Subscription begins with next published issue.
Back issues, while available are \$3 each.
Canada: \$15 per year US funds.
All other foreign subscriptions \$28 one year only.

30866

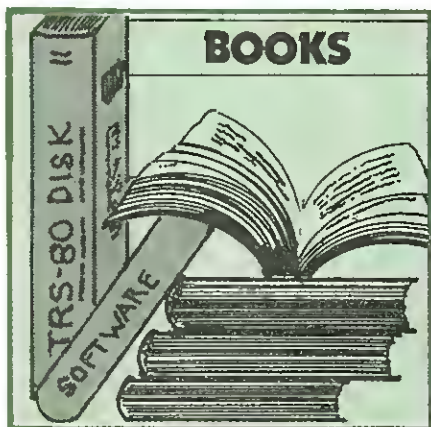

The Micro Millennium
by Christopher Evans
Viking Press
\$10.95

by Nancy Rohertson
80 Staff

Have you ever heard of compucide, or computer killers? A few weeks ago the anchorwoman on a Boston news program told listeners that an anti-computer ring had been short-circuiting computers in the metropolitan area. Other individuals had been arrested for attacking terminals with hammers and pouring honey down keyboards. The incidence of computer sabotage has become so common that a legal term has developed—compucide.

At least one of Christopher Evans' predictions from his book *The Micro Millennium* has come true: The anti-computer movement of the early phase of the Computer Revolution has begun.

The Micro Millennium claims that we are in the early phase of a sweeping cultural revolution spurred by the advent of microprocessors. The book begins with a concise and personable history of the people and scientific advancements which have brought the computer to its present development.

Eccentric Babbage

The first person to build a calculator and design a computer, Evans writes, was an eccentric Englishman named Charles Babbage. Early in the nineteenth century, Babbage built an enormous machine of cogs and wheels run by a handcrank that calculated mathematic equations. The Difference Machine, as Babbage called it, was built several decades before the discovery of electricity. While he was still working on its construction, Babbage began to design his Analytical Engine to deal with a variety of problems besides sums. Nobody paid much attention at the time.

Evans takes his readers through the stories of several other scientists and inventions until we come to the first operating computers, which came into existence in the United States and England during the second World War.

But by Evans' definition, the Computer Revolution did not begin until the invention of the transistor. In one stroke the transistor

multiplied processing speeds at exponential rates, shrank the size of computers and opened the way to expanding their memory capacity.

Evans cogently predicts the computer's role in the short-term future. He compares the Computer Revolution with the Industrial Revolution which caused changes in all levels of society through "emancipation of the power of the muscles." While segments of society fought against it, the momentum of the Industrial Revolution could not be turned back. Machines replaced laborers, and a period of widespread unemployment followed. As the economy adjusted to mechanization, the work day dwindled from 18 hours to the current seven or eight hours. Society adjusted to a higher standard of living.

The Computer Revolution, Evans argues, will bring "the emancipation of the power of the brain." The changes will occur, he predicts, at unparalleled speed.

One of the main functions of computers is information storage and retrieval. Since the invention of the printing press until the present, books have been the most reliable and efficient means of recording, preserving and disseminating thoughts and facts. In a short time, Evans believes the entire contents of the Library of Congress will be able to be stored in the memory of a microprocessor. As microcomputers become as common as television sets, a greater wealth of information will be available to more people than was ever believed possible.

Because they barter information, the professions, such as law, medicine and teaching, will be the jobs most severely affected by the spread of computers, according to Evans. Changes will be so vast and so rapid that backlash is inevitable.

Businesses will be run by microprocessors

communicating with microprocessors. Everybody will work shorter days. Most people will work at home. Concentration of the population in urban centers will become unnecessary. Commuting will die out. Eventually, the need to work may disappear all together.

These are just a few of the changes Evans predicts as a result of the computer's information storage and retrieval functions.

Problem Thinkers

Computers solve problems too. They think. Evans writes about the possibility of Ultra Intelligent Machines (UIMs) far surpassing the highest human IQ. Evans, a psychologist, is quite lucid about the definition of thinking. It is equally clear that he believes computers will surpass human intelligence. He gives credence to the belief that computers are already capable of creative and original thought, as opposed to programmed logic. A computer, programmed to test new proofs of Euclidean geometry, developed its own proof of the theorem "which shows that the base angles of an isosceles triangle are equal." Evans writes that the proof "had not before been known to Man."

Unfortunately, *The Micro Millennium* does not explore the ramifications of UIMs as cogently as it presents the history, present and short-term future of computers. Evans gets bogged down with straw dogs. He voices hollow objections to artificial intelligence that are transparently set up to be knocked down. The book begins to lose its interest.

In the last chapters, the focus is lost altogether. The book rambles to an unintelligent close. But before he runs out of steam, Evans is able to convince us that the Revolution is inevitable. Organized networks of compucide crusaders won't turn back the tide. ■

EDAS 4.0
Roy Soltoff
and Bill Schroeder
Galactic Software
Mequon, WI
\$229

by Jake Commander

The TRS-80 Model 11, presumably because it's more sophisticated than the Model 1, is being approached with respect by software suppliers. The software written for it also appears to be more sophisticated (which usually means more expensive) and seems to be written with much greater professionalism.

EDAS 4.0, the editor/assembler package from Galactic Software, is no exception and has a very good chance of becoming the standard assembler of the Model 11, just as EDTASM became the standard Model 1 assembler. The assembler uses most of the same EDTASM commands plus other more powerful additions.

EDTASM Is a Subset

Using the EDTASM commands as a subset of the EDAS 4.0 command set is one of the

most attractive things about the package. A machine language programmer familiar with the Model 1 assembler will be able to plug in and switch on EDAS 4.0.

For the newcomer to EDAS 4.0, a full menu of commands, including syntax, is viewable merely by hitting the ENTER key. It's a thoughtful touch which saves wearing out the manual.

As you'd expect from a product of this quality, the manual is comprehensive and well laid out. It contains an in-depth overview, full command summary, and also includes a full reference list of Z-80 opcodes and address modes.

I had the pleasure of assembling a fairly large program using EDAS 4.0 and had no problems whatsoever. In fact, just like any good assembler or compiler, its usefulness is taken for granted after a very short time.

One particularly nice thing which you can do is to assemble directly to either memory or disk. That means you can check out an assembled routine quickly in RAM, return via a simple RET instruction, reassemble the routine if necessary, and save the object code as a disk object file. You can only do this when your object code doesn't overwrite the assembler itself, its symbol table or any other illegal address.

You can also use this direct-to-memory op-

tion in conjunction with the Model II debugger, giving you an extremely powerful method of developing machine code software with minimal expenditure of time and effort.

The usual options, such as line print of assembly output, pause on errors, no listing, no object code generation or no symbol table, are also available at assembly time.

The symbol table printout does lack a cross-reference index, which is something I found conspicuous by its absence. It's about the only thing I found missing from this product.

One thing I particularly liked was the object code printout from a DEFM command. Bytes are printed out in a neat block for easy reference. Model I users will remember the peculiarities of their equivalent pseudo op. Other pseudo ops supported include DEFB, DEFW, DEFS and END.

Excellent Editor

The EDAS 4.0 editor is excellent. You can edit in either line or global mode. To the layman, that means you can manipulate source code by altering single lines or by altering the whole text buffer. For instance, if you discover you've used an illegal label, opcode, or whatever, there's no problem! Just use the global replace command and you can change all the illegal references at a single stroke. The editor will display each changed string as it comes to it. EDTASM eat your heart out!

Yet another new feature which I could have used hundreds of times is a block move command. It is invaluable. If you want to move a subroutine or a table to a more convenient position in the source code, then just use a simple M command. This will move a whole block of lines from one place within the text to another, and then automatically renumber the text. It's the sort of command that makes you wonder how you previously managed without it. The renumber facility is, of course, also available as a separate command.

The line editor functions in the same manner as the Level II BASIC line editor, except that while in the edit mode, the edited characters appear in reverse video. All user prompts and error messages also appear in reverse video, which makes feedback just that bit more obvious.

Other thoughtful touches include a screen clear that uses the F1 key, and advancing the

text page by using the F2 key. Forward and reverse scrolling is provided with the appropriate up or down-arrow key.

By now you should be getting the idea that this assembler does it all. Disk file handling is simplicity itself. W and L commands perform the writing and loading of source files. Once you've specified a source filespec, you don't need to keep repeating it in subsequent writes. The assembler will default to the original filespec if you omit it. This gives some protection against accidentally overwriting a source file by giving the wrong filespec, which can happen

Pyramid
Radio Shack
Tandy Corporation
Fort Worth, TX
\$14.95

by William O'Brien

Radio Shack's entry into the world of adventure games for the TRS-80 is titled Pyramid. The game is yet another example of Radio Shack's inability to deal with the consumer in a consumer's market.

An exasperated survivor of Adventureland and a glorious savior fresh from Programma's Wilderness Campaign for the Apple, I sat down to attack Pyramid.

Limited Instruction

The game's explanation is minimal. In a four-page booklet barely one side of a full page is used to explain it.

While proponents of adventure games may argue that directions should be limited to allow the user to grasp the theory and action, this is hardly fair to someone who has never been exposed to the genre.

Sadly, too, as with some other Radio Shack programs, the instructions seem to assume that the reader is either a child or an adult with the mentality of a slightly premature corned beef.

Pyramid suffers from the lack of a command word base. Command words reviewed in Pyramid are limited to GET, GO, SCORE, LOOK, INVENTORY, TAKE, DROP, THROW, CLIMB and HELP. Although this might seem a sizable base for a vocabulary, I don't think it is sufficient.

The scenario starts with the would-be explorer in the desert, standing in front of the tip of a Pyramid. You proceed using the assumed and known vocabularies.

Firstly, the LOOK command produces a "You can't go in that direction" response when nothing is apparent. More correct would be an "I see nothing," or "Nothing is there." "Looking" is not synonymous with "going" in the real world, however, the words seem to prompt similar responses in this game.

We go down a passageway, collect a few items, perhaps chase the elusive statue of a bird that comes alive if you approach it. A little exploration nets us a scepter with an ank at the top and a small empty box.

too easily after a long, mind-numbing session at the keyboard.

Text concatenation is yet another feature which you come to take for granted with this assembler. Model I users will, no doubt, be glad to know that source files can be transferred to EDAS 4.0 on the Model II. My own experience proved this, although it took a couple of goes before I got it right.

Though it's priced high, like most business software, no serious assembly language programmer is likely to find a more useful piece of software. ■

Down some steps, we enter a vast hall stretching almost endlessly toward the west. Two passages appear, one on either side, with another set of stairs leading down.

We may, at this point, discover a lump of gold in a room down the left passage, along with a sign that says, "You'll never get it up the stairs." And you can't.

The north passage to the throne room is guarded by an industrious serpent. Should we choose the lower passageway, we find the same snake (or its twin sibling) guarding an identical passage. That leaves us the long stretch to the west.

Hope not here, pilgrim. There, a bottomless chasm is impossible.

Don't try to jump it, you won't make it. You can try typing HELP, but don't expect any. You will only see the response, "I'm as confused as you are!"

It seems that this is the only response programmed for that command (or so I was told by a member of Computer Services), and it is the only response you will get.

You're on your own.

If you try climbing down, you can't. You can't go around, either. I decided that my only alternative was to do something not mentioned in the meager instructions. I called Texas.

Go Wave a Scepter

That call was as enlightening as typing HELP. I was told I should try waving my magic scepter. What magic scepter, I naively asked. Why, the magic scepter I must have picked up in another room.

"The one with the ank on it?" I queried.

"Yes," a voice squeaked out.

"But it never said it was a magic scepter," I replied.

That's the point of the game; you have to find these things out, I was told.

I was so disgruntled that I didn't return to the game. But that was because of the answer to my final question.

"Are you people down there really happy with the way this game performs?" I asked, and immediately dreaded the question.

"Of course we are!" I was told.

"You mean, you find nothing wrong in the way it operates?" I cried.

"No, not at all," he said, "in fact, a lot of people have called to complain that it is too difficult and to find out how to use it." ■



LOOKING FOR TRS~80* BUSINESS SOFTWARE? WE HAVE HUNDREDS OF QUALITY BUSINESS PROGRAMS IN STOCK! AT PRICES YOU CAN AFFORD.

◀ WHERE YOUR TRS~80* MEANS BUSINESS ▶

For the first time you can fill most of your software needs with one telephone call. Whether you are trying to find a specific program, custom software or just help with your system—give us a call. We have the people that count!

Invoicing • Inventory Control • Accounts Payable • Accounts Receivable • Payroll • General Ledger • Letter Writer • Word Processing • Mailing • Manufacturing Inventory • Cost Accounting • Sales Reporting • Stock Market • Business Statistics • Statistical Analysis • Data Base Systems • Medical Billing • Dental Billing • Special Industries • Advanced Accounting • Income Tax • Language • Personal Finance • Technical Programs • Insurance • CPA • Law Office • Asset Depreciation • Job Cost • Utility Programs • Education • Games • Home Programs • Loans • Credit Bureau • Electronics • Test Systems • Sports • Art • DOS Systems • BASIC lessons • and hundreds more!

Send for our free catalog or give us a call today. We also do custom programs as well as buy top quality programs.

Summer Special:
Complete business system \$299.95

**OVER 100 OF THE BEST
BUSINESS PROGRAMS FOR
THE TRS-80* MODEL I
AND MODEL II IN STOCK
READY FOR
IMMEDIATE DELIVERY.**

**LET US ANSWER YOUR
QUESTIONS TODAY.**

Software-Mart ✓ 286

24092 Pandora St • El Toro CA 92630

(714) 768-7818 Call 1-(800) 854-7115
Toll Free



24 Hour Service



**OUR BEST ADS ARE NOT WRITTEN —
THEY'RE RUNNING ON TRS-80's**

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

THE ASSEMBLY LINE

by William Barden, Jr.

"The algorithm for the ping-pong simulation is fairly simple, at least for this specialized case."

In a previous column, we looked at a high-speed graphics subroutine called SET. This month we're going to finish the discussion of high-speed assembly language graphics by showing how a modified version of SET can be used for graphics that may even operate too fast for some applications! (And they said that assembly language wasn't useful...)

The new version of SET is shown in Listing I. It has been modified to provide a reset capability. As in the old version, the position of the pixel to be set or reset is in the HL register pair on subroutine entry. The H register contains an X value of 0 through 127, while the L register contains a Y value of 0 through 47. In this version, however, the A register contains a zero if the pixel is to be set and a one if the pixel is to be reset.

To use the subroutine, put a valid value for X and Y in the HL register pair, and set the A register to a 0 or 1. The subroutine will set or reset the specified pixel and return to the calling program.

We won't repeat the discussion of the basic operation of the SETRST subroutine except to say that it converts the X,Y coordinates into a character position (0-1023) and bit position within the character position (0 through 5), and then sets or resets a single bit of the 6144 bytes within video display memory to change the pixel, or picture element. A complete discussion can be found in the previous column.

This month's version retains all of the old code and adds some reset logic. The new code is indicated by the boxed-in areas of the figure. Setting a pixel involved loading the byte in video display memory that contained the pixel involved, ORing in a single bit for the pixel position, along with the graphics mode bit in bit 7, and storing the altered byte back in video memory.

Resetting a pixel is very similar. After the byte containing the pixel is loaded, the single bit for the pixel is reset by ANDing in a mask value from the MASK1 table. This mask value has all bits set except for the bit to be reset for the pixel.

How Fast Is This Subroutine

Let's approximate its speed by a method that you can use for other assembly language code.

Follow the path of SETRST for either function and count the number of instructions as if you were the TRS-80. Assume some nominal case for loops. Going through the code we have lines 740,50,60,70,80,90,800 and 810. Line 800 is executed in about one-half the time, and we'll add it in here. Lines 810 through 840 constitute a divide by three through successive subtraction. Assuming an average Y of 24, we have

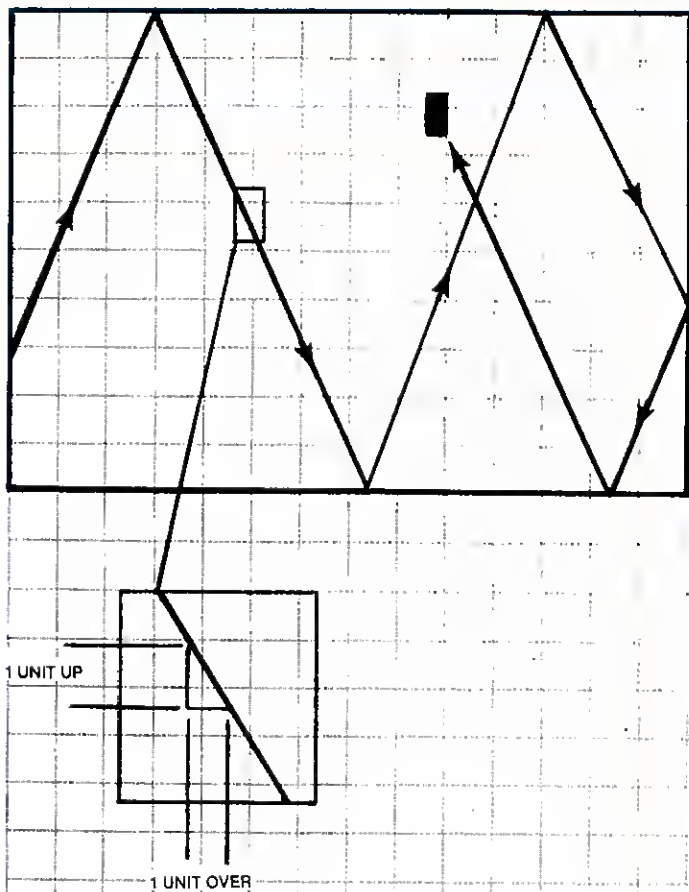


Fig. 1.

about 27 instructions. Seven lines plus 27 is 34; plus seven more through line 910 is 41.

At line 920 we have another loop of six iterations, making twelve more instructions for a total of 53. From here there are no more loops, and we can simply count the lines, assuming either a SET or RESET path. I count 14 more for SET and 15 for RESET, for a grand total of 67 or 68. Let's call it 68 instructions to perform either a SET or RESET pixel.

Now, how do we convert the instructions to execution time? We know that the TRS-80 runs at 1.774 megahertz, and that the execution times in the Radio Shack or Zilog assembly manual are in terms of a 4-MHz clock. Consequently, the TRS-80 runs $4/1.774$ times slower than a 4-MHz processor (except for you readers who have installed the 144-MHz clock speed-up kit, of course).

Let's assume an average instruction speed of

2.5 microseconds for 4 MHz. In TRS-80 terms, this is $2.5 * 4/1.774$, or about 5.6 microseconds. The total execution time to set or reset one pixel in the SETRST subroutine, then, is about $68 * 5.6$ microseconds or 380 microseconds, or .4 milliseconds (.4 thousandths of a second). Putting it another way, the number of pixels or points that can be processed by SETRST is about 2500 per second.

AL VS BASIC Graphics

How does this speed compare with BASIC? The SET, RESET commands in BASIC operate at about 122 pixels per second. Setting or resetting random pixels by POKEing values at best is about 800 pixels per second for truly random data. Strings are great for contiguous data on the same line, but too inefficient for random data. (For a discussion of these methods and their use see Radio Shack's new book *Program-*

ming Techniques for Level II BASIC by William Barden, Jr. Uh...no relation.)

A speed of 2500 points per second sounds very fast, and for some applications it is. As a matter of fact, for some applications, it's simply much too fast! An example is shown in the driver code below. A driver program, by the way, is generally main line code that is the primary code of an application. In this case, the driver produces a ping pong ball that bounces between the limits of the screen.

The driver is shown in Listing 2. We'll explain the algorithm and then go part-by-part through the driver program so that you can see how it works.

The algorithm for the ping-pong simulation is fairly simple, at least for this specialized case. We've defined the angle to be used as "one unit up for one unit over" as shown in Fig. 1. As each pixel is rectangular, this amounts to a rather acute angle with the top and bottom boundaries, as shown in the figure.

As the angle after the impact equals the angle before impact, we can always work with "one unit up for one unit over." The current position is given by X and Y. In standard TRS-80 notation: X=0 through 127, left to right and Y=0 through 47, top to bottom. The next position is calculated by adding increments, or "deltas" to both X and Y. These deltas will always be a plus one or a minus one to give the next X or Y value.

Whenever the ping-pong ball pixel hits a boundary, the current delta associated with that boundary is reversed. Boundaries occur at X=0 or 127 and Y=0 or 47. Suppose that the ball (pixel) is traveling towards the Y=0 boundary as shown in Fig. 2. The delta X value is +1 and the delta Y value is -1. If the next Y value will be 0, the new deltas will be X=+1 (unchanged) and Y=+1 (negated).

The algorithm may be stated as follows:

1. If current X is 0 or 127, negate delta X. Leave delta Y.
2. If current Y is 0 or 47, negate delta Y. Leave delta X.

Simulating Motion

To simulate motion of a dot, the next pixel must be turned on, and the previous pixel must be turned off rapidly. (There are some aesthetics to this that are not easily defined, such as the length of time between turning on the next pixel before turning off the old, but we'll plunge ahead without regarding them.) The driver program in Listing 2 first calls SETRST to set the new pixel, and then calls SETRST to reset the old pixel.

The section of code from line 160 through line 230 clears the screen by storing an 80H value in all 1024 character positions. The value 80H sets the graphics mode (bit 7 is a one) and sets the six pixels of each character position to 0. An interesting point: A blank character position may be made up of an 80H character, or an ASCII blank, 20H. Setting all character positions to 80H initializes all character positions to graphics mode. A count value of 1023 is decremented down to -1 by adding -1 to the value in HL. A "no carry" is produced only when the contents of HL goes from 0 to -1.

```

00690 ;* SUBROUTINE TO SET OR RESET A PIXEL GIVEN X (0-127) *
00700 ;* IN H REGISTER AND Y (0-47) IN L REGISTER. *
00710 ;* (A)=0 FOR SET, 1 FOR RESET. *
00720 ;*****
00730 ;
00740 SETRST PUSH AF ;SAVE SET/RESET FLAG
00750 LD B,H ;X
00760 LD A,L ;Y
00770 SRL E ;GET CHAR POSITION (0-63) IN E
00780 LD D,B ;SET COL# TO 0
00790 JR NC,SET10 ;GO IF COL#=0
00800 INC D ;COL#=1
00810 LD B,0FFH ;-1 TO B
00820 SET10 INC B ;BUMP QUOTIENT IN B=LINE#
00830 SUB 3 ;SUCCESSIVE SUBT FOR /3
00840 JP P,SET20 ;GO IF NOT NEGATIVE
00850 SET25 ADD A,3 ;ADD BACK FOR REMAINDER=ROW#
00860 RLCA ;(ROW#)*2
00870 ADD A,D ;(ROW#)*2+COL#=BIT POS
00880 SET27 LD C,A ;SAVE BIT POS IN C
00890 LD L,B ;LINE #
00900 LD H,0 ;NOW IN HL
00910 LD B,6 ;SHIFT COUNT
00920 SET30 ADD HL,HL ;MULTIPLY LINE#*64
00930 DJNZ SET30 ;LOOP TIL DONE
00940 LD D,0 ;DE NOW HAS CHAR POS
00950 ADD HL,DE ;(LINE#)*64+CHAR POS IN HL
00960 LD DE,3C00H ;START OF VIDEO
00970 SET34 ADD HL,DE ;(LINE#)*64+CHAR POS+3C00H
00980 LD B,0 ;BC NOW HAS BIT POS
00990 POP AF ;GET SET/RESET FLAG
01000 OR A ;TEST FLAG
01010 JR NZ,RESET ;GO IF RESET
01020 LD IX,MASK ;START OF MASK TABLE
01030 ADD IX,BC ;POINT TO MASK
01040 LD A,(HL) ;LOAD PIXEL
01050 OR (IX) ;SET PIXEL
01060 SET36 LD (HL),A ;STORE IN VIDEO
01070 RET ;RETURN
01080 RESET LD IX,MASK1 ;RESET MASK TABLE
01090 ADD IX,BC ;POINT TO MASK
01100 LD A,(HL) ;LOAD PIXEL
01110 AND (IX) ;RESET PIXEL
01120 JR SET36 ;GO TO STORE, RETURN
01130 MASK DEFB 81H ;MASK TABLE
01140 DEFB 82H
01150 DEFB 84H
01160 DEFB 88H
01170 DEFB 90H
01180 DEFB 9AH
01190 MASK1 DEFB 0F0H
01200 DEFB 0FDH
01210 DEFB 0FBH
01220 DEFB 0F7H
01230 DEFB 0EFH
01240 DEFB 0DFH
01250 END
00600 TOTAL ERRORS

```

Listing 1.

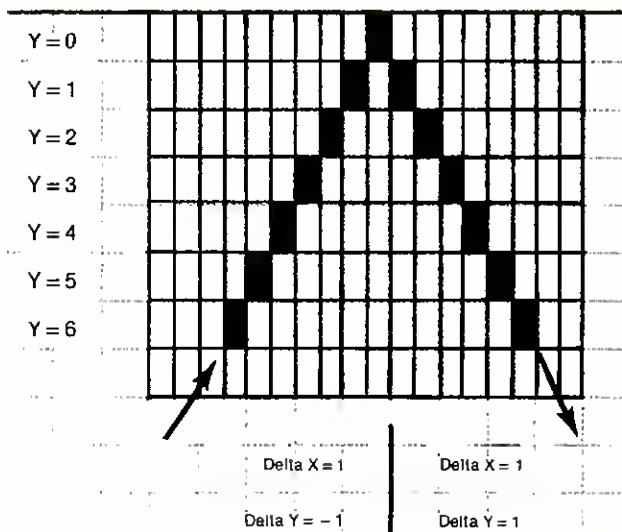


Fig. 2.

```

8000      00100      ORG      8000H      ;CHANGE AS REQUIRED
00110      ;*****
00120      ;* TEST DRIVER FOR SETRST SUBROUTINE, SIMULATES A PING- *
00130      ;* PONG TYPE COMPUTER GAME BY MOVING A SINGLE PIXEL. *
00140      ;*****
00150      ;
8000 3E80      00160  DRVR      LD      A,80H      ;GRAPHICS ALL OFF
8002 DD21003C  00170      LD      IX,3C00H      ;SCREEN START
8006 11FFFF      00180      LD      DE,-1      ;INCREMENT
8009 21FF03      00190      LD      HL,1023      ;# OF BYTES
800C DD7700      00200  LOOP      LD      (IX),A      ;STORE CHARACTER
800F DD23      00210      INC      IX      ;BUHP POINTER
8011 19      00220      ADD      HL,DE      ;DECREMENT COUNT
8012 DA0C00      00230      JP      C,LOOP      ;GO IF NOT 1024
8015 211010      00240      LD      HL,1010H      ;X=16, Y=16
8018 01FF01      00250      LD      BC,01FFH      ;DELTA X=1, DELTA Y=-1
801B 7C      00260  LOOP1      LD      A,H      ;GET CURRENT X
801C 80      00270      ADD      A,B      ;ADD DELTA X
801D 67      00280      LD      H,A      ;RESTORE
801E 7D      00290      LD      A,L      ;GET CURRENT Y
801F 81      00300      ADD      A,C      ;ADD DELTA Y
8020 6F      00310      LD      L,A      ;RESTORE
8021 225B80      00320      LD      (LAST),HL      ;SAVE SET POSITION
8024 E5      00330      PUSH     HL      ;SAVE CURRENT POSITION
8025 C5      00340      PUSH     BC      ;SAVE DELTAS
8026 AF      00350      XOR      A      ;FOR SET
8027 CD5D80      00360      CALL    SETRST      ;SET PIXEL
802A C1      00370      POP      BC      ;RESTORE DELTAS
802B E1      00380      POP      HL      ;RESTORE CURRENT POSITION
802C 7C      00390      LD      A,B      ;GET CURRENT X
802D B7      00400      OR      A      ;TEST FOR ZERO
802E 2804      00410      JR      Z,JMP1      ;GO IF 0
8030 FE7F      00420      CP      127      ;TEST FOR 127
8032 2004      00430      JR      NZ,JMP2      ;GO IF NOT 127
8034 78      00440  JMP1      LD      A,B      ;GET DELTA X
8035 ED44      00450      NEG      ;NEGATE
8037 47      00460      LD      B,A      ;RESTORE IN B
8038 7D      00470  JMP2      LD      A,L      ;GET CURRENT Y
8039 B7      00480      OR      A      ;TEST FOR ZERO
803A 2804      00490      JR      Z,JMP3      ;GO IF 0
803C FE2F      00500      CP      47      ;TEST FOR 47
803E 2004      00510      JR      NZ,JMP4      ;GO IF NOT 127
8040 79      00520  JMP3      LD      A,C      ;GET DELTA Y
8041 ED44      00530      NEG      ;NEGATE
8043 4F      00540      LD      C,A      ;RESTORE IN C
8044 E5      00550  JMP4      PUSH     HL      ;SAVE CURRENT POSITION
8045 C5      00560      PUSH     BC      ;SAVE DELTAS
8046 210005      00570      LD      HL,500H      ;FOR DELAY
8049 01FFFF      00580      LD      BC,-1      ;DECREMENT
804C 09      00590  LOOP2      ADD      HL,BC      ;DECREMENT COUNT
804D 38FD      00600      JR      C,LOOP2      ;DELAY HERE
804F 2A5B80      00610      LD      HL,(LAST)      ;GET LAST SET
8052 3E01      00620      LD      A,1      ;FOR RESET
8054 CD5D80      00630      CALL    SETRST      ;RESET PIXEL
8057 C1      00640      POP      BC      ;RESTORE DELTAS
8058 E1      00650      POP      HL      ;RESTORE CURRENT POSITION
8059 18C0      00660      JR      LOOP1      ;CONTINUE
805B 0000      00670  LAST      DEFW     0      ;LAST POSITION
00680      ;*****

```

Listing 2.

Line 240 initializes the current X,Y and delta values. A delta X of 1 means that the dot moves to the right; a delta of -1 means that the dot moves upward.

The code from line 260 through 660 is the main loop of the driver program. The code flows from top to bottom with only one imbedded loop from line 590 through line 600.

The code at LOOP1 adds the current delta X to the current value of X and the current delta Y to the current value of Y. This produces the new X,Y position. This position is saved in variable LAST for later use. After the new X,Y position is computed, a call is made to SETRST for setting the pixel. The HL and BC register pairs are saved in the stack before the call and restored after the call as SETRST destroys the contents of both.

The code from line 390 through 550 performs the boundary test. If the dot has just been written to a screen border (X=0 or 127, Y=0 or 47), the delta X or Y is negated, changing the direction away from the border on the

next computation of X,Y.

The code from line 570 through 600 is simply a time delay that delays by decrementing the initial value in HL by one each time through the loop. A minimum delay occurs with a LD HL,0, and a maximum delay occurs with a LD HL,65535.

The last action in the driver is to CALL SETRST to reset the pixel set previously before the time delay. The position of the pixel is in variable LAST, and this is loaded into HL with a subsequent call to SETRST.

The program loops continuously, moving the dot forever.

If you will enter the code into your Editor/Assembler, assemble and execute it, you will see a moving dot virtually identical to a electronic ping-pong game that bounces back and forth at angles to the boundary. It is not difficult to see how an actual ping-pong or other action game could be programmed this way.

One of the most interesting things about the method is that the speed of the dot is much too

fast when the minimum delay is used in the loop at 570. The dot moves so rapidly through the screen that it looks like a random pattern! A delay count of 500H slows it down to acceptable levels. Try experimenting with various delay counts and observe the effects.

Is complicated animation possible using SETRST? Yes, with some limitations. One of the first considerations is speed. Even though the dot moved (and having moved, wrote on) and had to be slowed down considerably, writing a series of dots for the frame of an animated picture is a different matter.

If the number of pixels that change per frame is "sparse," then the old pixels can be reset and a new group written. Suppose that one third of the pixels are on in a frame and that roughly the same number are to be on in subsequent frames. If one-third are reset, and a new one-third are then set, about 4096 calls are made to SETRST. It requires slightly under two seconds to process the sets and resets, making the updating process about one-half frame per second, which is certainly no Fantasia.

Taking a different analysis, ask yourself the question: How many pixels can be updated for a frame rate of 10 frames per second? If 2500 pixels can be processed per second, then about 125 pixels can be processed per frame, not counting the overhead of grabbing the data representing the pixels to be set and reset. This is still a fast enough rate to merit some experimentation in animation. It will be left up to the reader as a study assignment...

Another factor in animation, of course, is the method of digitizing the data. How are a series of drawings converted, easily and rapidly, into a set of X,Y points for SETRST to use? There appears to be no answer to this question, at least with existing I/O devices. What is required is some kind of scanning digitizer.

A third problem is accessing the data. Certainly disk storage is fast enough to keep up with the data for display. If the data is arranged in table form, then it can be scanned sequentially and rapidly by using some of the techniques discussed in last month's column. A possible scheme for storing the data is to use three bytes for each data entry in a table. The first byte represents the SET/RESET code (0 or 1), and the next two bytes represent the X and Y values respectively. Other bells and whistles, such as a function code (such as 2) for time delay are also feasible. The actual overhead in accessing tables of data for SETRST would be minimal compared to the processing time of the set and reset.

```

TABLE DEFB 0      ;SET
        DEFW 0607H ;X=6,Y=7
        DEFB 1      ;RESET
        DEFB 0508H ;X=5,Y=8

```

Next month we'll have the results of the second Assembly Line Programming Contest in which readers strive to write a multiply subroutine. (Would you believe a reader discovered a multiply instruction among the hitherto undiscovered Z-80 superset of 8123 instructions?) ■

For those of you who would like to contact me directly with problems or contest entries, write:

William Barden
28182 Palmada
Mission Viejo, CA 92692

MEMORY EXPANSION FOR TRS-80*

All you have to remember is to plug it in

Memory expansion. It's a field packed with intriguing theories. For instance, it has been suggested that the memory areas of the human brain are transferable from one body to another, like transplanted kidneys. In man or machine, a larger memory is always a welcome acquisition.

If you are interested in expanding your TRS-80 memory without shelling out dollars for a full blown expansion interface, we have just the solution.

Introducing the MT-32. Our new, brilliantly designed Printer/Memory expansion module for the TRS-80. This unit will add 16K or 32K of dynamic RAM to your basic 16K machine. The module also contains circuitry to drive Microtek's MT-80P dot matrix printer, or any other Centronics-compatible printer.

*No hardware modification to your TRS-80 is required. Just plug into your bus connector and you are ready to go.

All Microtek products are covered by a one year warranty.

Four configurations are available:

Without RAM in kit form (MT-32K @ \$79.50)
Without RAM assembled and tested (MT-32A @ \$99.50)
With 16K RAM assembled and tested (MT-32B @ \$159.50)
With 32K RAM assembled and tested (MT-32C @ \$199.50)

Available from Microtek
or your nearest computer dealer.



MICROTEK inc.

✓360

9514 Chesapeake Drive
San Diego, CA 92123
Tel. (714) 278-0633
TWX 910-335-1269

* TRS-80 is a Registered Trademark of Tandy Corp.

MEMORY TRANSPLANT



80 APPLICATIONS

by Dennis Kitsz

"When BASIC executes, it is regularly sweeping through parts of the Level II reserved RAM, a section of memory inaccessible to the user..."

"Execution dashes madly hither and yon; the TRON function gives a good picture of the execution path, but lines scroll wildly up and out before I can begin to see what any of them are."

Indeed, anyone trying to find out which line just executed a clear-screen command would agree with Mr. McRae. "Do you know any procedure for single-stepping in BASIC?"

When BASIC executes, it is regularly sweeping through parts of the Level II reserved RAM, a section of memory inaccessible to the user because of the BASIC program itself. In this area, calculations are stored, data moves in and out from tape, and much other vital, but variable information is held.

The authors of the language anticipated future expansions of many kinds, and so also provided a "telephone switchboard" arrangement, whereby every major ROM activity first loops through some RAM to find its next electronic pathway. We can intercept any loop at its RAM switchboard, patching in various routines such as key debounce, upper/lowercase software, time/date, and so on. For example, the keyboard scan sweeps through hex locations 4016 to 4017; video passes through 401E to 401F; a line printer would use 4026 and 4027.

Single Stepping

To single-step BASIC, we intercept the BASIC "interpreter", which can be collared at lo-

cations 4004 and 4005. The entire process is but three steps:

1. Grab hold of the interpreter loop and divert it to the single-stepper.
2. Before it can continue to interpret the next step, have it wait for a human go-ahead signal.

"Pat rang me up at bargain rate time, only he lives in California."

3. Delay it slightly before letting it move on to its original destination, in order to follow it better.

Program Listing 1 presents the 28-byte program, the first part of which is devoted simply to setting up the program. Line 10 assigns the start of our intercept routine to the HL register, line 20 patches it into the interpreter at 4004/4005 hex, and line 30 jumps back to a BASIC "ready" at 06CC.

The actual stepping routine is a mere 19 bytes. It first saves the two active register pairs

(AF and BC). At line 60, the accumulator is told to obtain the value present at address 3880 hex—the keyboard row containing only the shift key (and a control key if you've modified your unit). By itself, Shift offers a BASIC program no information, thus making it an ideal "single-stepper" key.

If Shift is not depressed, there will be no data present at address 3880H. Thus, zero AND zero (the accumulator ANDed with itself) sets a "zero flag," and line 80 is forced to loop back and check again. When at last Shift is depressed, the loop falls through, and the program continues to line 90.

At that point, register pair BC is assigned a hex value of 2000 (This is an arbitrary value, and may be lengthened.), and next CALLs a delay routine available in ROM at address 0060. At the end of the delay, both registers are restored, and the program proceeds with a jump to 1D78... the original value found in locations 4004 and 4005.

It's just about as simple a utility as can be found, and the machine version loads from tape in one-half second. Two cautions should be noted: First, load this program only after the BASIC program you wish to step through is in place, because this routine single steps CLOAD as well! If you use the BASIC version (Listing 2), key it in at the end of your BASIC program under scrutiny, and run it separately; the lines may then be deleted. Secondly, remember to protect memory at 32739 for your 16K machine.

With the given delay, execution is slowed to about five BASIC actions per second; a measure of that rate is the short stepper program itself, which takes six seconds to list five lines. Reducing the delay to 0001 will bring program operation closer to normal speed.

Readers Respond

Many more readers have written or called than need to; here are a few suggestions before you dial my number:

• Daniel from Utah was the fourteenth person to call about "typos" in Babyroot. Never trust your own proofreading; have a friend, preferably one who knows nothing about computers, read the program aloud to you. Dan's 12-year-old son caught the mistake.

• Roy phoned from Illinois angrily demanding to know why a program wouldn't work on his disk-based system. This column is biased toward the "standard" TRS-80, which is 16K Level II. If you've got the luxury of extras, it means you've also got a bit of conversion work to do. Disk users, please read your manuals instead of sending

```
21 ED 7F      00000      ORG      7FE4H      ;32740 DECIMAL
22 04 40      00010      LD      HL,START    ;ADDRESS TO PATCH
C3 CC 06      00020      LD      (4004H),HL   ;THIS IS PATCH TO BASIC
F5           00030      JP      06CCH      ;"READY" WHEN DONE
C5           00040      START  PUSH  AF      ;SAVE ACCUM. & FLAGS
3A 80 38      00050      PUSH  BC      ;SAVE COUNTER IN USE
A7           00060      LD      A,(3880H)    ;SHIFT KEYBOARD ROW
28 FA        00070      AND      A          ;TEST FOR ZERO
01 00 20      00080      JR      Z,LOOP     ;GO BACK IF NO KEY
CD 60 00      00090      LD      BC,2000H    ;LOAD UP DELAY VALUE
C1           00100      CALL  0060H    ;DELAY ROUTINE IN ROM
F1           00110      POP      BC      ;RESTORE B & C REGISTERS
C3 78 1D      00120      POP      AF      ;RESTORE A & F, TOO
              00130      JP      1D78H    ;BACK WHERE YA SHUDDA BEEN
              00140      END      SETUP    ;SET SLASH (/) ENTRY
```

Program Listing 1.

```
10 POKE 16553,255 : REM * CORRECTS LEVEL II READ-DATA ERROR
20 FOR X = 32740 TO 32767 : READ A : POKE X,A : NEXT X
30 POKE 16526,228 : POKE 16527,127 : MZ =USR (0)
40 DATA 33,237,127,34,4,64,195,204,6,245,197,58,128,56
50 DATA 167,40,250,1,0,32,205,96,0,193,241,195,120,29
```

delay

Program Listing 2.

"corrections" of my failure to include DEFUSR statements. Level II has but one USR command.

- Dave wrote from New York asking why his control key wouldn't function. It is vital to understand the operation of any published modification. Minor inconsistencies are almost inevitable, but understanding the theory of operation will assist your diagnosis. Dave's problem was an incorrectly routed wire which was easily eked out by running a one-line BASIC program.
- From Maine, Rick called with a computer buzzing angrily after he attempted a reverse-video alteration. If you do call, have your computer, tech manual, soldering iron, wire, paper, pencil, and telephone sharing the same desk. When Rick's son called back (Dad had left for a school board meeting.) with everything at hand, a successful repair—a wayward solder ball—was ten minutes away.
- Pat rang me up at bargain rate time, only he lives in California, I am not alert at 2:45 a.m.

Anecdotes Too

It's lazy summer anecdote time . . . how about this one? John from New York State is a TRS-80 enthusiast, and was attempting some hardware modifications. The local Radio Shack begged ignorance over wire-wrap wire ("But that's got no insulation," said the clerk.), so John used 18-gauge solid copper.

Well, that's good for light bulbs and power tools, so I need not detail the mess in which John shortly found himself. A desperate voice greeted me late one evening, relating the grim escapade. The computer had failed to exhibit normal signs of life, so John took it to Radio Shack for a repair estimate. It was returned with a quote of \$460. *Four-hundred-sixty dollars!*

Radio Shack does not take kindly to modifi-

cations, and discourages repairs by giving unreasonably high estimates.

John, soon to be an electrical engineering student, was mortified. Mom didn't know, and he was loathe to break the news. What could he do?

A bit of telephonic diagnosis narrowed his options. During our conversation, John also revealed that, faced with the potential Radio Shack repair ticket, he had tried to remove and replace the integrated circuit which he believed to be the culprit. His TRS-80 was, it seemed, a bit messy. He had lifted traces and burned the board with an overheated soldering iron; the desperation grew in his voice.

I agreed to take on the repair, if he shipped the unit and all the bits and pieces that were left over from his attempts. All ye weary who labor, take heart. John's TRS-80 was in about the worst condition I had seen since a buddy's PDP-11 had been zapped by lightning during a very macho game of "chicken," played while

an electrical storm raged over a meeting of the Vermont Computer Guild.

I bridged the traces on John's 80, cleaned the board and discovered the problem in a fried buffer chip—a 75-cent item. It was little more than an hour's work . . . four-hundred-sixty dollars indeed! I installed the modifications John wanted and shipped the unit clean and sparkling back to New York.

Two days later, another phone call. The voice had the same hard edge of panic. The postal service had delivered the box—crushed, gashed and not working. The postmaster said he'd have to have the unit for eight weeks—(for "examination"—while a claim was being processed.

John took it apart instead. He found the difficulty in the ROM board's connections, shaken loose by its ordeal.

The TRS-80 is working again, three weeks and much anguish later. The moral? No moral. It's summer. Just watch that 18-gauge wire. ■

```
9999 PRINT#-1," " : AS = INKEYS : IF AS = "" THEN 9999 ELSE RETURN
```

Plug your computer's cassette output into an audio amp, and insert a GOSUB 9999 at any place in a program that needs your attention. It will call you; press a key and the program continues.

```
9999 AS = INKEYS : IF AS = "" THEN 9999 ELSE LPRINT AS : GOTO 9999
```

Here's a quick electronic typewriter. It's non-correcting, for sure, but beats loading a word processing program to add a few comments to a printout.

```
9999 FOR X = 17129 TO 32767 : PRINT CHR$(PEEK(X)) : NEXT X
```

Put this one in at the end of a program and have a look at how a BASIC program and its variables are stored in memory. If you run X from zero to 12288, you can take a peek into ROM as well.

```
9999 FOR X = 1 TO 50 : OUT 255,0 : OUT 255,15 : NEXT X : OUT 255,PEEK(16445) : RETURN
```

This is a subroutine that rattles the relay and jitters the screen; great for some dull games that might need some life.

Finally, poke your 80 in the ribs with these:

POKE 16405,0 and kill the keyboard; POKE 16405,1 to get it back. Don't do that from command level.
POKE 16413,0 kills video; get it back with POKE 16413,7.

One Liners

For readers who'd like to contact Dennis directly, try writing:
Roxbury, VT 05669.

Features of the FATIGUE FIGHTER:

- ✓ REDUCES OPERATOR FATIGUE THEREBY ALLOWING MORE EFFICIENT USE OF THE COMPUTER
- ✓ INSTALLS EASILY WITH PRESSURE SENSITIVE ADHESIVE. NO SCREWS, CLIPS, OR DRILLING TO DAMAGE MONITOR
- ✓ DESIGNED TO MATCH THE 80" STYLING FROM THE BLACK AND SILVER BORDER TO THE LETTERING TYPE FACE
- ✓ FITS BOTH THE MODEL I AND MODEL II
- ✓ DOES NOT VOID THE COMPUTER WARRANTY
- ✓ ENHANCES THE APPEARANCE OF THE MONITOR
- ✓ PROVIDES A DURABLE, EASY TO CLEAN SURFACE


TO ORDER SEND:

*PRICE INCLUDES SHIPPING
THE-80 IS A TRADEMARK OF TANDY

Name and Address: Typed or Clearly Printed with Check or Money Order for \$14.95 per Unit. \$10.00 per \$2.50 Additional Per Order. Florida Residents Add 6% Sales Tax.

SID

SOUTHERN INNOVATIVE DESIGN
1820 NORTHEAST 12TH STREET
GAINESVILLE, FLORIDA 32601

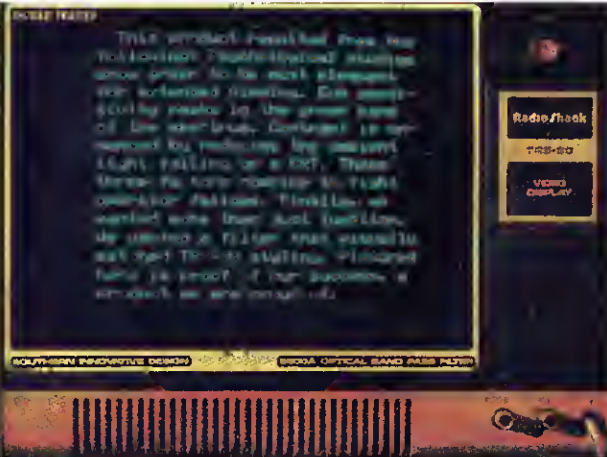

ATTENTION
TRS-80 USERS!

GET QUALITY STOCK, IMPRINTED
CHECKS AND STATEMENTS WITH A
PROFESSIONAL LOOK. THERE'S NO
NEED TO RE-FORMAT — ORDER THE
FORMS THAT FIT YOUR SOFTWARE.



TRS-80
FORMS

Radio Shack

Osborne

NOW!
works with Line Printer III

Structured Systems Group

Peachtree/TCS

Standard Radio Shack payroll checks, payables check, and statement. These forms are designed for use on fixed and adjustable pin-feed printers. Also, a 20% first order discount is available for these forms only.

Standard Peachtree and TCS payroll and payables check. This form is available in one or three part.

Standard Structured Systems checks and statement.

SEND FOR FREE SAMPLES AND BROCHURE TODAY!

- * Minimum orders as low as 500
- * 3 week STANDARD or 9 day RUSH delivery
- * Nationwide, factory-direct, freight paid service
- * Free set-up samples available upon request
- * Library of forms available for many other formats



**Checks
To-Go**

✓ 46

TRS-80 and Radio Shack are registered trademarks of Tandy Corp.

8384 Hercules St. • La Mesa, CA 92041 • (714) 460-4975



80 ACCOUNTANT

by Michael Tannenbaum C.P.A.

"If this is an example of financial software... in the future, businessmen and professionals may rejoice."

In the January issue of *80 Microcomputing*, I described basic requirements for automated accounting recordkeeping systems and discussed in detail some of the currently available financial software. The introduction of the Model II, and the development of more advanced software has increased the range of recordkeeping alternatives available to microcomputer users. With this in mind, I think it is now appropriate to discuss some financial reporting concepts before reviewing the latest software available.

Recordkeeping at Fault

In our practice my partners and I visit many clients who complain about their financial reports. Frequent complaints include, "my income statement is always late," or, "when it arrives I don't understand what it is trying to tell me." When the facts are probed, the accounting recordkeeping system is usually at fault. Often it is full of extraneous detail and too complicated to be practical for preparing management reports.

In a more compact system data does not have to be subdivided, and the chance of misclassification is significantly reduced.

If you are installing a microcomputer accounting system, take the opportunity to review your chart of accounts with the help of your accountant.

Consider how you plan to use a system such as Radio Shack's General Ledger II and its reports to control your business. For example, how do you look at sales? Do you sell only one commodity or many? If you sell many different types of items, do you need to know sales, sales returns and net sales by type?

If you sell only three items, such as nails, screws, and bolts, your recordkeeping system will have to keep track of the dollar value of all sales and related transactions for each of these categories. This includes sales, sales returns, purchases and inventory categories. Thus, to determine the net profit contribution for each category, you must keep 12 different accounting records.

The general ledger recordkeeping system is not the best place to analyze gross profit by item. Radio Shack has provided another system for this purpose called the Inventory Management System. This system could be used with the accounting system as a control.

The same concepts of simplified recordkeeping should govern the choice of operating expenses. If your business is run from one office, then all you need is one cost center. However, if there is a warehouse and a sales office, each facility should have its own cost center, and each will have its own group expenses. Although

there are some benefits with this approach there are also problems. For example, if each of these facilities are located under the same roof, you must allocate common services, such as light, telephone and power to each cost center.

Model I to Model II

Let's take a look at Radio Shack's General Ledger II and see how it compares to the Model I General Ledger previously reviewed. There are many similarities. Like its predecessor, General Ledger II has categories to group accounts to facilitate analysis on the income statement and balance sheet.

Ledger II, provides ten categories for the income statement and six for the balance sheet. The first three expense categories are pre-defined as gross sales, sales returns and allowances and cost of goods sold. If you don't use sales returns and allowances or cost of sales, as in a service business, these categories shouldn't be used according to the documentation.

Like the Model I, there are categories available for the balance sheet. However the Model II allows six different categories, current assets, fixed assets, current liabilities, long term liabilities and capital. You define the balance sheet during data entry.

As with the Model I, the posting procedure requires the assignment of the document name.

The machine generates a serial number for each document entered. Like the Model I, the Model II posting procedures are very slow. However, documentation supports the posting procedure and an audit trail is generated.

The General Ledger II program represents a usable tool for the average businessman. In addition, the greater data on the balance sheets allows the professional accountant to calculate solvency ratios, fund management ratios and return on investment ratios which were impossible in the earlier version.

The level of documentation that accompanies the General Ledger II represents a significant improvement from that furnished for the Model I. Radio Shack has provided a sample session to be performed prior to initializing your own accounts. This session covers enough different types of transactions to familiarize an operator with the responses required.

I would like to commend Radio Shack on the interactive screen displays used on the General Ledger. Account maintenance and updates are quite easy. If this is an example of financial software which Radio Shack will be presenting in the future, businessmen and professionals may rejoice. Since the output reports have a place to indicate source, there may be some attempt in the future to intergrade accounts payable and receivable modules into the General Ledger. ■

EDIT 80

by Jim Perry

The subtitle for this month's column could be "A Parting Shot," as I am leaving the hills of New Hampshire, and 80, for the hills and volcanoes of the West Coast. The response to 80 has been overwhelming. Everybody seems to love it—except for Tandy. But times change, and I'm glad to say that Tandy has now asked Ed Juge to write a regular column for 80 beginning this month. The corporate structure in Fort Worth seems to have realized the folly of its ways.

But, to mix a metaphor or two, an old leopard learns new tricks. Tandy's latest trick is their introduction of a new "improved" two-chip ROM set for Level II. (Previous versions used three chips.)

At first this seems like a simple enough change, and it does away with the messy ribbon

cable inside your machine. However, there are a couple of catches in the new version. First, the shift-down arrow combination is not recognized by the computer. A great deal of software uses this combination as a control key, but, of course, this software is not "approved" by Radio Shack. Such software will now need reworking to be compatible with all TRS-80s.

The second (unannounced) nasty is a different memory size. A two-byte difference may not seem important to Fort Worth, but it can mean a hell of a lot to beginners—all instructions, for example, now give the wrong figure—and assembly language programmers—by not reserving enough memory.

Though Tandy says it is trying, the corporation still seems to be up to the same "new" tricks. Time will tell. ■

REMARKS

From page 10

unit at the factory for finding problems in the CPU boards. Something along this line would be helpful at their service centers. With this unit the board is set into a slot and sucked into contact with probes by a vacuum. A computer in the test unit then checks out everything in a flash and prints out a ticket showing which chip or part must be replaced.

Naturally, I was busy counting the number of systems being tested with an eye to checking up on the reports from outside sources on the production at present. I was satisfied to find that my sources were accurate. The number of sets in test for their 24-hour burn-in corresponded to the quantities I'd heard projected for the first year's production of the Model II.

I was surprised to learn that about one third of the Model I systems are Level I. Our sales of Instant Software programs have been under 10 percent for the Level I. I suspect that most Level I owners buying software are looking for programs which will run on both Level I and II, since they intend to upgrade. ■



Finished units are then put into a further burn-in test.



Any unit showing any problems or instability is rejected and sent back for further checking and repairs. They are very picky.

INSIDE 80

by Ed Juge, director of computer merchandising. Tandy Radio Shack

We at Radio Shack's home office are pleased to be offered a monthly column in *80 Microcomputing*. From a personal viewpoint, I'm looking forward to writing it—I knew my reputation for overwriting everything would eventually pay off!

This first effort will be short, since Wayne's offer preceded his copy deadline by only two days. I'll try to keep you current on happenings, bugs, fixes, new products, and those things which might not appear elsewhere in print. I'll try to answer a few often-asked questions. But if you send questions, please, understand, that the time required by my primary Radio Shack duties just won't permit individual replies to mail.

Trying to Respond

Unfortunately, the growth of the TRS-80 marketplace has exceeded our ability to communicate effectively with our owners. Some of you have decided we don't care about your problems and desires. At Radio Shack we all believe this column can improve that situation. The column will help us understand your desires and help you understand how we're trying to respond to them, or, in some cases—unfortunately—why we can't.

I'll promise you honestly. I'm also going to try to convince you that most of us are real guys and gals, just like you. Our ranks include electronic hobbyists, "gadget freaks," and a few ham radio operators—myself included. We know our future depends on your satisfaction.

Every request, every suggestion and, yes, every complaint is taken very seriously. Even though in a mass market environment we can't respond to the individual desires of every owner, your requests tell us when there is enough interest to justify a product. So, if you can pardon us for not being able to answer every single one... "keep those cards and letters coming!"

This month, I'll tell you about something we introduced in May, called TRS-80 Videotex. It's a concept, it's software, and it will soon be hardware too.

TRS-80 Videotex allows you to access information with your own computer or terminal—in color or black and white. A 32 by 16 screen format, compatible with the popular color computers will alleviate wrapped-around information transmitted for 80×24 screens.

We first introduced the Videotex to a group of information suppliers. We suggested the benefits of making their information available to the general public, especially in one universally usable format.

At the same time, we announced an exclusive agreement between Radio Shack and CompuServe, a major computer time sharing service to business, industry, and government. They will provide a new "CompuServe Information Ser-

vice" in TRS-80 Videotex format. Radio Shack will market the software for TRS-80s AND other popular microcomputers. Target data for the service and TRS-80 software is this month. Software for other computers will follow as soon as it can be completed.

(Now, something you gotta' learn about me is that I'll try to be accurate about dates, but Murphy's Law has taken its toll on enough of my predications so as to keep me from becoming nationally known for uncanny accuracy. Please, give me room for a bit of error. As a matter of policy, I suggest you don't order anything from your local Radio Shack store before they receive a catalog number. Our data processing system throws unknown items into a bit bucket designed to emulate a black hole, and your order may never be heard from again!)

Anyway, back to my story. The CompuServe Information Service will initially be available between 6 PM and 5 AM EST weekdays, all day Saturday, Sundays and holidays. For the nominal fee of \$5 per hour—plus \$2 per hour, if you must access them through Tymnet in your city—you will have available the Associated Press news, weather and sports, local news from some 10 or 11 papers yet to be announced, an electronic mail system, a number of MicroNet personal computing services and Radio Shack Users News. Four or five more services are awaiting final negotiation, but I can't be specific until they're sewed up.

Some services will be available at a surcharge, such as the current MicroQuote service that provides historical stock market data over the past six years. You'll always be warned of extra charges when you select such a service.

CompuServe tells me that their Information Service and the TRS-80 Videotex concept have caused an unprecedented interest.

Time Sharing Without Delay


If you've tried time sharing systems where the delays were excessive, you'll be pleased to know that CompuServe plans a response time of five seconds or less, 95 percent of the time! I've seen one of their CPUs manage 150 simultaneous jobs with a response time far less than one second.

The TRS-80 Videotex software package will cost less than \$30 and will include your own ID number and password. According to CompuServe, you'll have one free hour of time on their Information Service before billing, normally through your Mastercard or Visa.

I'll bet you're wondering about the hardware I mentioned. Well, we will be offering, an intelligent Videotex terminal. The price will be \$399. The terminal will include a built-in direct-connect modem and RF output for your existing color TV receiver. Look for further information in two or three months. ■

TRS-80* OWNERS:

- Let the computer write your "Basic" program for you!
- Draw pictures, animated figures, data forms!
- Create a library of display forms!
- Produce "Commercial" grade software!

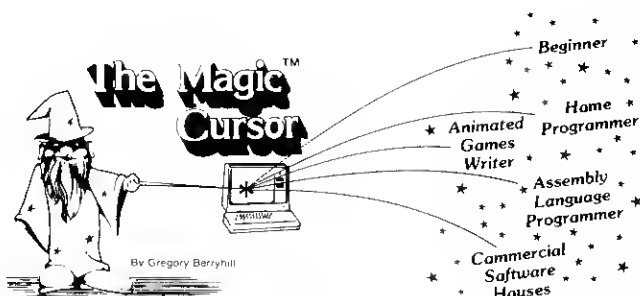

The **Magic Cursor** is a Revolutionary Family of Products which provides a dramatic new method of reproducing drawings and displays that you create on your screen. It makes both simple displays and complex interactive data input forms. It stores a "BASIC PROGRAM" on disk (or tape) ready for you to execute alone or as a subroutine. It produces screens in both standard or wide screen.

It is available for any level 2, 16K or larger system with tape or disk. An optional version is now available which creates an assembly language program.

Be sure to pick out the system that fits your present needs and order it today. you may upgrade your original copy by paying the difference and a moderate service charge.

MAGIC CURSOR PROGRAMS

THE MAGIC CURSOR allows you to easily create screens (including graphics) on your video. A powerful command then generates the BASIC instructions to recreate the screen. For the first time, a program for automatic generation of video display forms. (16K Tape or Disk) **\$24.95**

THE MAGIC CURSOR I additionally makes sophisticated Data Entry and Display easy. With magic Cursor I you define the Data Entry or Display fields directly on your screen. The definition commands generate the BASIC instructions to implement the Data Entry and Display. The magic Cursor I has commands which move, center, and duplicate blocks of graphical or alpha/numeric displays. You can even justify text. (16K Tape Only) **\$79.95**

THE MAGIC CURSOR II adds the power to write animated games easily in BASIC. The Magic Cursor II allows you to reload previous screens either from memory or from Disk. You can then modify them and store either the modified screen or only the changes. (32K Disk Only) **\$99.95**

THE MAGIC CURSOR III will be available soon for the new Model II Computer (32K One or more Disks) **\$149.95**

THE MAGIC CURSOR IV provides the features of Magic Cursor II but stores an assembly language program. (32K Disk Only) **\$99.95**

*Trademark of Radio Shack, a Tandy Co.

Call 713/474-2484 or order by mail. Master Charge, Visa, Certified Check or Money Order accepted. Personal Checks require 14 days to clear. C.O.D. or collect calls not accepted. Software guaranteed for replacement only. Prices subject to change without notice. Some programs supplied on cassette tape. For disk versions, the cassette supplied will automatically create a disk file.

NEW RELEASES FROM CCC!!!

The Supply Room

A sophisticated program that is easy to operate. This unique system helps you manage your retail or wholesale inventory of up to 1000 line items. Cost may be fractions of a cent, item quantities may be decimal values. Automatic cost averaging of updated items and suggested sales prices based on gross profit. Transaction reports produced during posting functions. Printed reports include:

- | | |
|-------------------------------|-----------------------|
| 1. Transaction Listings | 4. Items on Order |
| 2. Complete Inventory Listing | 5. Items Out of Stock |
| 3. Listings by Prefix | 6. Suggested P.O.'s |
- Requires Mod 1, 32K, 2 Disk **\$250.00**

The Filing Cabinet

Take that collection of Job Orders, Personnel Records, Reports, etc. and get them organized. You define up to 14 data input fields specifying field type - alpha/numeric or \$\$\$, field length and field separators - such as slashes, etc. During data input, the cursor provides for character input and skips over the field separators.

But that's only half the story. Output reports are automatic formatted and program automatically requests column headings.

This means you can customize your own data base manager, complete with rapid data input and selective output reports. Comes complete with documentation.

Requires Mod 1, 32K, Disk & Printer **\$100.00**
Or Mod2, 64K, 1 Disk & Printer **\$150.00**

The Restaurateur's Consultant

By Ty Halderman

This food and beverage management tool dramatically reduces the human factors in food cost analysis. Those tasks required to effectively operate any restaurant or food service business. Over a half dozen reports give uniform, accurate and up to the minute information for profitability. And, handling of daily cost changes requires only minutes per week instead of hours, because the Consultant makes all the necessary conversions from your case prices. Reports include:

- | | |
|--|-----------------------|
| 1. Menu Recipes. | 5. Food Cost Summary. |
| 2. Ingredient Listing. | 6. Input Data Sheets. |
| 3. Supplier Master File. | 7. Batch Update. |
| 4. Complete Listing of Food Cost Analysis. | |
- Mod 1, 32K, 2 Disk, Printer or Mod 2 **\$750.00**

WRITE FOR OUR COMPLETE SOFTWARE CATALOG!!

Send Check or Money Order Payable to:

CUSTOM COMPUTER CENTER, INC.



ATTN: Jim Martens
P.O. BOX 58042
HOUSTON, TEXAS 77058
or call: (713) 474-2484

QUAN.	DESCRIPTION	SYSTEM (Size: Tape or Disk)	PRICE
	Handling Charge: \$1.50 Texas Res. add 6% Sales Tax.	TAX & HANDLING	
		TOTAL	

MASTER CHARGE / VISA

SEND INFORMATION ONLY.


Card # _____ Expires _____

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Instant Software™ New Releases



OTHELLO

In the game of Othello, there is no such thing as a lucky move. The game is a constant test of concentration and tactics.

The object of the game is to capture all the pieces on the board by bracketing your opponent's pieces. The score can fluctuate wildly as you plan your moves.

Your opponent can be another player or you can play the computer. You can even watch the computer play itself.

Don't think that just because you are either a hot-shot player or a complete

tyro that Othello is not for you. The program allows you to adjust its IQ. An IQ of one will give you an easy opponent, but an IQ of seven will have the program playing a no-holds barred game.

The Othello program is a gracious opponent and, if you ask, it will suggest the best move for you to make. It will even allow you to set up special end games to sharpen your strategy.

The Othello program, a maddening, frustrating, and thoroughly engrossing game from Instant Software.

For the TRS-80 Level II 16K. Order no. 0046R. \$9.95.


OTHER PROGRAMS AVAILABLE FROM INSTANT SOFTWARE

TRS-80* LEVEL I & II

0001R	Basic and Intermediate Lunar Lander.....	\$7.95
0002R	Space Trek II.....	\$7.95
0004R	Beginner's Backgammon/Keno.....	\$7.95
0007R	Ham Package I.....	\$7.95
0008R	Electronics I.....	\$7.95
0009R	Golf/Cross-Out.....	\$7.95
0017R	Air Flight Simulation.....	\$7.95
0019R	Business Package IV.....	\$9.95
0023R	Oil Tycoon.....	\$7.95
0033R	Bowling.....	\$7.95
0043R	Santa Paravia and Fiumaccio.....	\$7.95
0046R	Othello.....	\$9.95
0050R	Grade Book.....	\$7.95
0057R	Chessmate-80.....	\$19.95
0099R	Typing Teacher.....	\$7.95

TRS-80* LEVEL II

0028R	Ramrom Patrol/Tie Fighter/Klingon Capture.....	\$7.95
0034R	Space Trek IV.....	\$7.95
0047R	Who-Dun-It?.....	\$7.95
0049R	Demo II.....	\$7.95
0051R	Ball Turret Gunner.....	\$9.95
0055R	Demo III.....	\$7.95
0056R	Bowling League Statistics System.....	\$24.95
0058R	Programmer's Converter.....	\$9.95
0063R	Cards.....	\$7.95
0065R	Teacher.....	\$9.95
0066R	Mimic.....	\$7.95
0068R	Your Cribbage and Checkers Partner.....	\$9.95
0069R	Household Accountant.....	\$7.95
0070R	Skirmish-80.....	\$9.95
0072R	Financial Assistant.....	\$7.95
0076R	Utility I.....	\$7.95
0081R	Utility II.....	\$7.95
0082R	Daredevil.....	\$9.95
0084R	Music Master.....	\$7.95
0089R	Energy Audit.....	\$49.95
0092R	Archimede's Apprentice.....	\$9.95
0100R	Video Speed-Reading Trainer.....	\$7.95
0103R	Personal Bill Paying.....	\$7.95
0106R	Airmail Pilot.....	\$7.95
0111R	Wordwatch.....	\$7.95
0117R	Night Flight.....	\$9.95
0125R	Investor's Paradise.....	\$9.95
0127R	Surveyor's Apprentice.....	\$9.95
0132R	Energy Consumption.....	\$9.95
0135R	Executive Expense Report Generator.....	\$9.95
0136R	Beginner's Russian.....	\$9.95
0137R	Everyday Russian.....	\$9.95
0156R	Money Madness.....	\$9.95

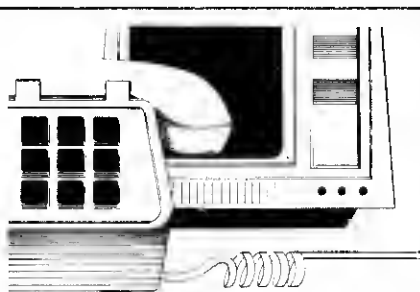

THE COMMUNICATOR

This program offers you the fast way to transfer data from one location to another, using the telephone lines. The full "ORIGINATE/ANSWER" capability allows your TRS-80 to be controlled from a remote-based terminal, or allows two TRS-80 computers to "talk" to each other.

You will be able to pass all kinds of data, or programs, from home base to a remote terminal, or between computers, at the speed of light — or at 9600 baud, anyway.

Operation is simple. You dial the telephone number at the location of the TRS-80 at your home base. After the connection has been established, each telephone handset is placed upon the modem at both locations and the "hook-up" is completed. You will be able to control the home-based TRS-80 (if you called from a remote based terminal) and the transmission of data back and forth can proceed. This procedure can be reversed, allowing the home-based TRS-80 computer to control the remote-based terminal.

You'll see a simultaneous display of information on both the home-based and the remote-based monitors which facilitates the requests for specific information to be transmitted. This program is available to police, schools, stockbrokers, and many others who will find it to be invaluable.

The versatility of the Communicator program is enormous, and you can take advantage of this technology right now. Order No. 0126R \$9.95.

0171R	Flight Path.....	\$9.95
0250R	IRV.....	\$24.95

TRS-80* DISKS

0052RD	Energy Audit.....	\$75.00
0075RD	Accounts Receivable/ Payable.....	\$199.95
0123RD	The One-D Mailing List.....	\$24.95
0139RD	Disk-Scope.....	\$19.95
0147RD	Check Management System.....	\$39.95
0180RD	Disk Editor.....	\$39.95
0212RD	The Russian Disk.....	\$24.95

PROGRAMS IN GERMAN:

The programs listed here can be purchased through:
MicroShop Bodensee
Markstrasse 3,
7778 Markdorf, West Germany

TRS-80*

6004R	Beginner's Backgammon/Keno
6007R	Ham Package I
6008R	Electronics I
6009R	Golf/Cross-Out
6017R	Air Flight Simulation
6028R	RamRom Patrol
6031R	Space Trek III
6034R	Space Trek IV
6043R	Santa Paravia and Fiumaccio
6065R	Teacher
6069R	Household Accountant
6072R	Financial Assistant
6076R	Utility II
6081R	Utility I

PROGRAMS IN ITALIAN:

The programs listed here can be purchased through:
HOMIC s.r.l.
Piazza De Angeli 1,
20146 Milano, Italy

TRS-80*

9043R	Acquaviva e Montelalcone
9065R	Professore
9107R	Guerre Stellari
9108R	Volo Aereo/Space Trek

*A trademark of Tandy Corporation

PETERBOROUGH, N.H. 03458
603-924-7296

TO ORDER: Look for these programs at the dealer nearest you. If your store does not stock Instant Software send your order with payment to: Instant Software Inc., Order Dept., Peterborough, N.H. 03458 (Add \$1.00 for handling) or call toll-free 1-800-258-5473 (VISA, Master Charge and American Express accepted).

Prices subject to change without notice.

Instant Software™

Ask for Instant Software at a computer store near you.

Alabama

Anderson Computers
3156 University Dr., Huntsville
Computerland of Huntsville
3020 University Dr., Huntsville
Olensky Bros.
3763 Airport Blvd., Mobile

Arizona

Professional Data Systems
4506 A.N. 16th St., Phoenix
Milets TV & Radio
621 East Broadway, Mesa
California
AMCO Elect. Supply
535 E. Arrow Hwy., Azusa
Byte Shop
8038 Clairmont Mesa Blvd., San Diego
Byte Shop
123 E. Yorba Linda, Placentia
Byte Shop of Mt. View
1415 West El Camino Real, Mt. View
Byte Shop of Sacramento
6041 Greenback Ln., Citrus Heights
Byte Shop of San Francisco
1032 Irving St., San Francisco
Capital Computer Systems
3396 El Camino Ave., Sacramento
Computers Made Easy
819 East Ave. Q-9, Palmdale
Computer Store of San Leandro
701 MacArthur Blvd., San Leandro
Computer World
6791 Westminster Ave., Westminster
Computerland
16720 S. Hawthorne, Lawndale
Computerland of W. LA
6840 La Cienega Blvd., Inglewood
Coast Electronics
3118 No. Main St., Mono Bay
Computerland
24001 via Fabricante No 904,
Mission Viejo
Hobbytronics
1378 So. Bascom Ave., San Jose
Hobby World
19511 Business Ctr. Dr., Unit 6
Boulder
Huntington Computing
2020 Charles St., Corcoran
J.C.E. House Inc.
398 North E. St., San Bernardino
Jade Computer Products
4901 W. Rosecrans, Hawthorne
Malibu Microcomputing
23910A Deville Way, Malibu
Marlam Co.
6351 Almaden Rd., San Jose
Opamp/Technical Books
1033 N. Sycamore Ave., Los Angeles
PC Computers
10166 San Pablo Ave., El Cerrito
Q.I. Computers, Inc.
15818 Hawthorne Blvd., Lawndale
Radio Shack Dealer
8250 Mira Mesa Blvd., San Diego
Radio Shack Dealer
50 N. Cabrillo Hwy., Half Moon Bay
Santa Rosa Computer Center
604 7th St., Santa Rosa
Silver Spur Elect. Comm.
13552 Central Ave., Chino
The Computer Store
820 Broadway, Santa Monica

California

Byte Shop
123 E. Yorba Linda, Placentia
Byte Shop of Mt. View
1415 West El Camino Real, Mt. View
Byte Shop of Sacramento
6041 Greenback Ln., Citrus Heights
Byte Shop of San Francisco
1032 Irving St., San Francisco
Capital Computer Systems
3396 El Camino Ave., Sacramento
Computers Made Easy
819 East Ave. Q-9, Palmdale
Computer Store of San Leandro
701 MacArthur Blvd., San Leandro
Computer World
6791 Westminster Ave., Westminster
Computerland
16720 S. Hawthorne, Lawndale
Computerland of W. LA
6840 La Cienega Blvd., Inglewood
Coast Electronics
3118 No. Main St., Mono Bay
Computerland
24001 via Fabricante No 904,
Mission Viejo
Hobbytronics
1378 So. Bascom Ave., San Jose
Hobby World
19511 Business Ctr. Dr., Unit 6
Boulder
Huntington Computing
2020 Charles St., Corcoran
J.C.E. House Inc.
398 North E. St., San Bernardino
Jade Computer Products
4901 W. Rosecrans, Hawthorne
Malibu Microcomputing
23910A Deville Way, Malibu
Marlam Co.
6351 Almaden Rd., San Jose
Opamp/Technical Books
1033 N. Sycamore Ave., Los Angeles
PC Computers
10166 San Pablo Ave., El Cerrito
Q.I. Computers, Inc.
15818 Hawthorne Blvd., Lawndale
Radio Shack Dealer
8250 Mira Mesa Blvd., San Diego
Radio Shack Dealer
50 N. Cabrillo Hwy., Half Moon Bay
Santa Rosa Computer Center
604 7th St., Santa Rosa
Silver Spur Elect. Comm.
13552 Central Ave., Chino
The Computer Store
820 Broadway, Santa Monica

Colorado

Byte Shop
3464 S. Acoma St., Englewood
Colorado Computer Systems
311 W. 74th Ave., Westminster
Computerland of North Denver
8749 Wadsworth Blvd., Arvada
Computer Shack
1635 South Prairie, Pueblo
The Computer Store
2300 Welton St., Denver

Connecticut

American Business Computers
454 Thames St., Groton
Computerlab
130 Jefferson, New London
Computerland
1700 Post Rd., Fairfield
Computerland
60 Skiff St., Hamden
Computer Works
1439 Post Rd. E., Liberty Plaza,
Westport

D.C.

The Program Store
4200 Wisconsin Ave. N.W.,
Washington, D.C.

Florida

Al Personal Computer
178 Oxford Rd., Fern Park
AMF Electronics
11146 N. 30th St., Tampa
Boyd-Ebert Corporation
1328 West 15th St., Panama City
Computer Center
6578 Central Ave., St. Petersburg
Computer Junction
5450 So. State Rd. 7, Ft. Lauderdale
Computerland
7374 S. Tamiami Trail, Sarasota
Computerland of Ft. Lauderdale
3953 N. Federal Hwy., Ft. Lauderdale
Computerland of Jacksonville
2777-6 University Blvd. W.
Jacksonville

Georgia

Computerland of Tampa
1520 E. Fowler Ave., Tampa
Computerland of West Palm Beach
4275 Okeechobee Blvd., West Palm Beach
Computer Shack
3336 Beach Blvd., Jacksonville
Computer System Resources Inc.
3222 S.W. 35th Blvd., Gainesville
Curtis Waters Enterprises
236 Talbot Ave., Melbourne
Health Kit Electronic
4705 W. 18th Ave. Center, Hialeah
HIS Computerization
1295 Cypress Ave., Melbourne
Ukalan Computer Store
Airport Rd., Destin
Williams Radio & TV Inc.
2062 Liberty St., Jacksonville
Your Basic Computer Store
971 Seaway Dr., Ft. Pierce

Hawaii

Computerland of Hawaii
567 N. Federal Hwy., Honolulu
Radio Shack Assoc. Store
1712 S. King St., Honolulu
Idaho
Electronic Specialists
8411 Fairview Ave., Boise
Illinois
Computerland
4507 North Sterling, Peoria
Computerland
9511 N. Milwaukee Ave., Niles
Computer Station
3659 Nameoki Rd., Granite City
Garcia & Associates
203 No. Wabash Ave., Suite 1510, Chicago
Midwest Micro Computers, Inc.
706 S. Main St., Lombard

Indiana

Computer Center of South Bend
51591 US 31 North, South Bend
Data Domain
221 W. Dodds, Bloomington
Fall Creek Electronics Store
732 Center St., Pendleton
Iowa
Memory Bank
4128 Brady St., Davenport
Kansas
Central Kansas Computers
6 S. Broadway, Herington
Louisiana
Computer Shoppe Inc.
3225 Dauby Pk., Metairie
Maine
Main Computronics
Intown Plaza, Bangor
Radio Shack
315 Main Mall Rd., So. Portland
Maryland
Jack Fines Electronics
4808 DeBilen Circle, Pikesville
The Comm Center
9624 Ft. Meade Rd., Laurel
Massachusetts
ComputerCity
175 Main St., Charlestown
ComputerCity
50 Worcester Rd., Framingham
Computerland of Boston
214 Worcester Rd., Wellesley
Computer Packages Unlimited
244 W. Boylston St., West Boylston
Lighthouse Computer Software
14 Fall River Ave., Rehoboth

Michigan

Computer Center
28251 Ford Rd., Garden City
Computer Connections
38437 Grand River, Farmington Hills
Computerland of Grand Rapids
2927 28th St. S.E., Kentwood
Computerland of Southfield
29673 Northwestern Hwy., Southfield
Computer Mart
560 W. 14 Mile Rd., Clawson
Computer Room
455 E. Michigan Ave., Kalamazoo
Computronix Corp.
423 S. Saginaw Rd., Midland
Hobby House
1035 W. Territorial Rd., Battle Creek
Main Systems Inc.
1161 No. Ballenger Hwy., Flint
The Alternate Source
1806 Ada, Lansing
The Eight Bit Corner
722 Evanston Ave., Muskegon
Ye Olde Teacher Shoppe
1823 Wilmyre St., Ypsilanti

Minnesota

Computerland of Hopkins
11319 Hwy F., Hopkins
Digital Den
Burnsville Center
Minnesota Software Inc.
5422 Fisher St., White Bear Lake
Zim Computers
5717 Xerxes Ave., N. Brooklyn Center
Mississippi
Dyer's, Inc.
207 E. Main St., West Point
Softwarehouse
816 Foley St., Jackson
W. Vernon Foster Inc.
816 Foley St., Jackson
Missouri
Century Next Computers
1001 E. Walnut, Columbia
Comp-U-Tra Software Center
51 Florissant Oaks Shopping Center
Florissant
Software Shack
16501 Greenwald Court, Belton
Montana
Intermountain Computer
529 So. 9th St., Livingston
Personal Computer
121 Red Oak Dr., Carl Junction
The Computer Store
1216 16th St. W., #35, Billings
Nebraska
Computerland of Omaha
11031 Elm St., Omaha
Midwest Computer Co. Inc.
86251 St., Omaha
Midwest Computer Co. Inc.
4442 S. 84th St., Omaha
Midwest Computer Co. Inc.
4403 S. 87th St., Omaha
Scottsbluff Typewriters Inc.
1824 Broadway, Scottsbluff
Nevada
Century 23
4556 Spring Mountain Rd., Las Vegas
New Hampshire
Bitsnbytes Computer Center
568 Pleasant St., Concord
ComputerCity
1525 S. Willow, Manchester
Paul's TV
Main St., Fremont
Portsmouth Computer Center
31 Raynes Ave., Portsmouth
Radio Shack Assoc. Store
Fairbanks Plaza, Keene
New Jersey
Computer Corner of NJ
439 Rte. #23, Pompton Plains
Computer Encounter
2 Nassau St., Princeton
Computerland
35 Plaza Rte. #4, W. Paramus
Computer Mart of NJ
501 Rte. 27, Iselin
Crowley's
Rd. #3, Whitehouse Station
Dave's Electronics
Pennsville Shopping Ctr., Pennsville
GHB Enterprises Inc.
Rte. 38, Rudderaw Ave., Mapleshade
Lashen Electronics Inc.
21 Broadway, Denville

Nebraska

Computerland of Hopkins
11319 Hwy F., Hopkins
Digital Den
Burnsville Center
Minnesota Software Inc.
5422 Fisher St., White Bear Lake
Zim Computers
5717 Xerxes Ave., N. Brooklyn Center
Mississippi
Dyer's, Inc.
207 E. Main St., West Point
Softwarehouse
816 Foley St., Jackson
W. Vernon Foster Inc.
816 Foley St., Jackson
Missouri
Century Next Computers
1001 E. Walnut, Columbia
Comp-U-Tra Software Center
51 Florissant Oaks Shopping Center
Florissant
Software Shack
16501 Greenwald Court, Belton
Montana
Intermountain Computer
529 So. 9th St., Livingston
Personal Computer
121 Red Oak Dr., Carl Junction
The Computer Store
1216 16th St. W., #35, Billings
Nebraska
Computerland of Omaha
11031 Elm St., Omaha
Midwest Computer Co. Inc.
86251 St., Omaha
Midwest Computer Co. Inc.
4442 S. 84th St., Omaha
Midwest Computer Co. Inc.
4403 S. 87th St., Omaha
Scottsbluff Typewriters Inc.
1824 Broadway, Scottsbluff
Nevada
Century 23
4556 Spring Mountain Rd., Las Vegas
New Hampshire
Bitsnbytes Computer Center
568 Pleasant St., Concord
ComputerCity
1525 S. Willow, Manchester
Paul's TV
Main St., Fremont
Portsmouth Computer Center
31 Raynes Ave., Portsmouth
Radio Shack Assoc. Store
Fairbanks Plaza, Keene
New Jersey
Computer Corner of NJ
439 Rte. #23, Pompton Plains
Computer Encounter
2 Nassau St., Princeton
Computerland
35 Plaza Rte. #4, W. Paramus
Computer Mart of NJ
501 Rte. 27, Iselin
Crowley's
Rd. #3, Whitehouse Station
Dave's Electronics
Pennsville Shopping Ctr., Pennsville
GHB Enterprises Inc.
Rte. 38, Rudderaw Ave., Mapleshade
Lashen Electronics Inc.
21 Broadway, Denville

New Mexico

Autel Electronics Co.
232 Wisconsin N.E., Albuquerque
South West Computer Center
121 Wyatt Drive, Sulte 7, Las Cruces
Thomas E. Carr Jeweler
1300A Tenth St., Alamogordo
New York
Aristo Craft
314 Fifth Ave., NYC
Bits & Bytes
2600 Straight Rd., Fredonia
Computer Corner
200 Hamilton Ave., White Plains
Computer Eia Corp.
1570 3rd Ave., New York
Computer Factory
485 Lexington Ave., NYC
Computer House, Inc.
721 Atlantic Ave., Rochester
Computerland of Nassau
79 Westbury Ave., Carle Place
Computerland of New York City
58 W. 44th St., New York
Computer World
519 Boston Post Rd., Port Chester
Comtek Electronics, Inc.
2666 Coney Island Ave., Brooklyn
Comtek Electronics, Inc.
Slaten Island Mall
Store 220A, Slaten Island
Digibyte Systems Corp.
31E. 31st St., New York
80-Microcomputer Services
118 Masten Ave., Cohoes
Home Computer Center
671 Monroe Ave., Rochester
Mr. Computer
Imp. Plaza, Rte. 9, Wappingers Falls
Softtron Systems
308 Columbia Turnpike, Rensselaer
The Computer Tree Inc.
409 Hooper Rd., Endwell
Upscale Computer Shop
629 French Rd., Campus Plaza
New Hartford
North Carolina
Byte Shop of Raleigh
1213 Hillsborough St., Raleigh
Sound Mill
Slocum Shopping Ctr., Havelock
Ohio
Altair Business Systems, Inc.
5252 North Dixie Dr., Dayton
Astro Video Electronics
504 E. Main St., Lancaster
Cincinnati Computer Store
4816 Interstate Dr., Cincinnati
Computerland
4579 Great Northern Blvd.,
N. Olmstead
Computerland
6429 Busch Blvd., Columbus
Computerland
1298 Som Rd., Mayfield Heights
Computer Store of Toledo
18 Hillwyck Dr., Toledo
Forbes Microsystems Inc.
35 N. Broad, Fairborn
Microcomputer Center
7900 Paragon Rd., Dayton
Micro-Mini Computer World
74 Robinwood, Columbus
21st Century Shop
16 Convention Way, Cincinnati
Universal Amateur Radio, Inc.
1280 Aida Dr., Columbus
Oklahoma
Sounds, Etc.
Hwy. 33, Watonga
Vern Street Products
Radio Shack Dealer
114 W. Taffi St., Sapulpa
Oregon
Computerland of Portland
12020 S.W. Main St., Tigard
Computer Pathways Unlimited, Inc.
2151 Davor St. S.E., Salem
TRS-80 Products Ltd.
3520 S.E. Vineyard Rd., Portland
Pennsylvania
Artco Elect.
302 Wyoming Ave., Kingston
Artco Elect.
Back Mountain Shop. Ctr.
Shavertown
Audio Mart
518 Fifth Ave., New Brighton
Computer Workshoppe
3848 William Penn Hwy., Monroeville

Ontario

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.
Computart
411 Roosevelt Ave., Ottawa, Ontario
Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.
Micro Shack of W. Canada
333 Park Street, Regina, Sask.
Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta
Total Computer Systems
Ajax, Ontario

Washington

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg
Computerland of Pittsburgh
5499 William Flynn Hwy., Gibsonia
Erie Computer Co.
2127 West 8th St., Erie
Mighty Byte Computer Center
537 Easton Rd., Horsham
Personal Computer Corp.
24-26 West Lancaster Ave., Paoli
Personal Computer Corp.
Frazier Mall, Lancaster Ave., Frazier
Rhode Island
Computer City
165 Angell St., Providence
Digital World, Inc.
329 Bald Hill Rd., Warwick
South Dakota
CB Radio Shack
21st and Broadway, Yankton
Tennessee
ACS
1100 8th Ave. So., Nashville
Computerlab
671 S. Menden Hall Rd., Memphis
H & H Electronics Inc.
509 N. Jackson St., Tullahoma
Texas
Computer Post
2142 N. Collins, Arlington
Houston Computer Tech
5313 Bissonnet, Sealtie
Interactive Computer
7620 Dashwood, Houston
K.A. Elect.
9090 Stemmons Fwy., Dallas
Pan American Elect. Inc.
1117 Conway, Mission
Radio Shack Dealer
21969 Katy Freeway, Katy
The Computer Shop
6353 Camp Bowie Blvd., Ft. Worth
Waghalier Books Inc.
3 Greenway Plaza E., Houston
Utah
DC Computer Co.
1911 West 70 South, Provo
Quality Technology
470 E. 2nd St., Salt Lake City
Virginia
Computer Works
Rte. 6, Box 65A, Harrisonburg
Home Computer Center
2927 Virginia Beach Blvd
Virginia Beach
Southside Radio Comm.
135 Pickwick Ave., Colonial Heights
Washington
American Mercantile Co. Inc.
2418 1st Ave. S., Seattle
Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue
Computer Connection Inc.
3100 NW Bucklin Hill Rd., Silverdale
Computerland of South King Co.
1500 S. 36th St., Suite 12
Federal Way
Personal Computers
S 104 Freva, Spokane
Ye Old Computer Shop
1301 G. Washington, Richland
West Virginia
The Computer Corner Inc.
22 Beechurst Ave., Morgantown
The Computer Store
Municipal Parking Bldg., Charleston
Wisconsin
Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield
Computerland
690 S. Whitney Way, Madison
Computerworld
3015 W. Wisconsin Ave., Appleton
Patented Microsystems
4265 W. Loomis Rd., Milwaukee
Wyoming
Computer Concepts
1104 Logan Ave., Cheyenne
Puerto Rico
The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace
Canada
CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St. W. Toronto, Ont.
MSV 2A5
Computer

14-year-old Is Professional Programmer

He's just like other 14 year-old boys growing up in New England. He likes model trains, bubble gum and baseball games. He worries about what his friends will think if someone writes about him in a national magazine.

But, if you go upstairs at Greg Hassett's house, you'll find a 48K dual disk drive TRS-80, complete with line printer and everything it takes to keep them running. Very likely, you'll find Greg hard at work on a new program or tuning up an old one. At this young age, he is indeed a programmer.

When he was 12, Greg sold a program for \$150 and became the youngest professionally published adventure programmer in the county. The \$150 covered the original, non-exclusive rights for Journey to the Center of the Earth which were sold to The Software Exchange in Milford, NH. The updated version netted many times that amount through its distribution by Mad Hatter Software in Dracut, MA.

Sorcerer's Castle, Atlantis and Enchanted Island followed. Greg's style and ability to stick to a story increased along with his revenues. The personal combat in Castle and Atlantis was an interesting addition to the familiar GO, GET, PUSH, PULL routines of most computer adventures. The thematic orientation and colorful description that popularized Scott Adams' adventures became more and more apparent in Greg's work, too. In contrast to Adams' sophisticated, brain-puzzlers, Greg's adventures are light, witty and solvable.

Greg's M-Treck was a departure from his dedication to adventures. It is a graphic game of cosmic engines and scanning devices with sound effects. The object, like all Star Trek games, is to track down and kill Klingons.

Greg wrote all of these early programs in BASIC. Frustrated by the limitations of speed and space, he took a crash course in machine code.

After writing Enchanted Island Plus, his first machine language adventure, Greg started his own company named Adventure World. It is now the sole source of his several machine language adventures. Both Mad Hatter and Adventure World are distributors of Greg's BASIC programs.

At 14 Greg is not only a programmer, but a businessman. He serves both individuals and retailers. He contracts for mass production of his programs, then packages and mails the orders himself.

Greg is also thinking about broadening the



Fourteen-year-old Greg Hassett at work.

base of Adventure World to include distribution of programs by other authors. "But, if that happens at all," he says, "it will be a year or two in the future." According to Hassett, his software outlets are currently netting him "about \$800 a month."

Greg has just finished writing The World's Edge. It follows on the heels of Mystery Mansion, and is also in machine code. "I'm just beginning to think about what I'll write next. I don't know what it will be."

In the fall he'll be entering the tenth grade at Phillips Academy where he was recently accepted. When he is finished with school, Greg wants to work as a programmer for Digital or another large corporation, switching from adventures to the challenges of technical-applications software.

But a 14-year-old boy might have better things to do with his time than create and market his own software and deal with production contracts and bookkeeping. Not so says Greg. His business "sometimes gets in the way of school, but it doesn't interfere with my social life." Like most kids his age, he says he wants "to loaf around" during his summer break. ■

By Bob Liddil

Finding Made in Electric Pencil II Copyright Lawsuit

May 23, 1980 Judge S. S. Schwartz of the Los Angeles Superior Court ruled in favor of the defendant in the complaint brought by

Michael Shroyer Software, Inc., Palm Springs, CA against Vector Graphic, Inc., Westlake Village, CA. The complaint was brought for "breach of contract, wrongful copying and injunction" in August of 1979 in regard to Electric Pencil II.

Michael Shroyer Software, Inc. is expected to appeal the decision.

The issues involved revolve around the application of copyright laws to programming. The final wording of Judge Schwartz's decision is likely to be signed and available sometime this month.

Vector Graphic, Inc. has already filed a cross-complaint charging Shroyer's company with libel and business interference, plus a suit against Shroyer, personally, along with several other individuals, for libel. ■

National VTOS Users Group

TCUG, Inc., a nonprofit computer club located in the Washington, DC. metropolitan area, is organizing and chairing a national users group for TRS-80 owners operating under the Virtual Technology Operating System (VTOS).

The purpose of this group is to improve upon the lack of documentation of VTOS, an excellent operating system for the TRS-80, by sharing the knowledge derived through investigation of VTOS, how it behaves, how best to utilize its many features, and how to make it work best for you.

Anyone interested may join the VTOS Users Group (VUG) for an annual fee of \$15 which

entitles the member to the bi-monthly VUG Journal and monthly TCUG Newsletter.

Contact Bill Beall, TCUG, Inc., VTOS Subgroup, PO Box 2235, Reston, VA 22090.

The TCUG bulletin board, which is intended to be a focal point for TRS-80 and VTOS items, is available 24 hours by phone at (703) 620-4990. ■

Business Week Article Incorrect?

An article printed in *Business Week*, June 16 stated that, "Over the next six weeks Tandy plans a barrage of new products to follow up its initial foray into the small business market with its TRS-80 Model II."

It goes on to say that a desktop computer for scientists and engineers, a word processor based on the Model II and small computers that will automate inventory controls are to be expected.

At Tandy Corp., both H. L. Seigel, National Publicity and Promotion Manager, and Senior Vice President of Operations, Charles Phillips, deny the thrust of the *Business Week* article. They both say no new computers that they know of will be marketed by the company before the end of the year.

Videotex, another product mentioned in the *Business Week* article, will be available this fall, according to Phillips. The software product will link TRS-80s and other micros to television and telephone lines for network information retrieval from Compuserve, Inc., Columbus, OH.

While Tandy denies the thrust of the article,

the question is why do well-informed sources in the industry persist in their belief that new models will be announced by Tandy in August. ■

Mid-Atlantic Micro Show

The Mid-Atlantic Personal and Business Computer Show will be at the Philadelphia Civic Center from Thursday, Sept. 25 through Sunday, Sept. 28, 1980.

The show hours are 11:00 A.M. to 9:30 P.M. Thursday through Saturday, and 11:00 A.M. to 6:00 P.M. Sunday. General Admission for adults will be \$5.

For further information, contact National Computer Shows, P.O. Box 678, Brookline Village, MA 02147. ■

Science and Research Management Software

Software Engineering Systems, Inc. is releasing three software modules for management science and operations research. Written for the TRS-80, these modules are interactive. They are the Decision System, the Mathematical Programming System and the Simulation System.

The Decision System consists of a break-even algorithm, a decision analysis algorithm, a lottery-insurance analysis algorithm, an element-ordering algorithm and a game-theory algorithm.

The Mathematical Programming System consists of three algorithms: one for linear programming, one for transportation and another for optimizing network flow.

The Simulation System is a program which helps simulate continuous dynamic systems described by differential or difference equations. It provides for integration, printing and plotting of the output on video screen or on a printer.

All modules are sold for \$25 from Software Engineering Systems, Inc., 3214 75th St., Lubbock, TX 79423.

Reader Service ✓ 176.

All software that is available for the TRS-80 Level II 16K system will operate in the PMC-80. Level II BASIC or SYSTEM will load in the PMC-80 50-pin bus through a 40-pin interface adapter available from Personal Micro Computers, Inc.

Disc based programs can be run on the PMC-80 using the Radio Shack expansion interface or other commercially available equivalents. With the expansion interface, all peripherals designed for the TRS-80 are compatible with the PMC-80. This includes Winchester disks, speech recognition, printers, RS232 adapters, etc.

EACA already has established markets in Australia and Europe for the PMC-80. Initially, however, it is only going to be available by mail order in the U.S.A. and Canada.

To facilitate mail order marketing, the company offers a 30-day money back guarantee. Service on the equipment will be performed by PMC at its Mountain View, CA factory. (Warranties will be voided if modifications are made to the internal system.)

For further information, contact Personal Micro Computers, Inc., 475 Ellis St., Mountain View, CA 94043.

Reader Service ✓ 325.

proximately \$200 for a CP/M license. It is written for a TRS-80 Model II plus Daisywheel printer.

Restaurant Accounting Control System is designed to serve the restaurant owner's accounting and management control needs. Software costs \$4,000.

Business Accounting Control System consists of accounts receivable, billing inventory control, accounts payable, payroll and general ledger programs. It costs \$350 to \$7,500 depending on the number of modules desired.

Occupational Computing Co., Inc. is located at 22311 Ventura Blvd., Suite 123, Woodland Hills, CA 91364.

Reader Service ✓ 177.

Realty Management System

The Key Realty Management System is a software package available for TRS-80 and CP/M based computers.

It is comprised of five control subsystems, in-

Realty Management System

Complex & Custom Software

Occupational Computing Company is a group of computer analysts, programmers and engineers specializing in Radio Shack computers. The new company is offering services in systems analysis, site evaluation and training. They are also selling standard and custom software.

The company is currently marketing Magic Wand, Restaurant Accounting Control System and Business Accounting Control System. Each is a complex software system.

Magic Wand is a word processor including automatic word break, flexible line length, pagination, block movement, fill-in-the-blank documents, etc. The software costs \$400 plus ap-

TRS-80 Replica Marketed

Personal Micro Computers, Inc. (PMC) has made an exclusive marketing agreement with the Hong Kong manufacturer, EACA International Limited to offer a software and hardware compatible equivalent of the Radio Shack Model I, Level II TRS-80.

The PMC-80, as the new computer is called, has a cassette tape recorder, 16K memory, Level II Microsoft BASIC interpreter in ROM, power supply, computer and keyboard in one cabinet. It will display on either a video monitor like the TRS-80 or on a standard TV set using a built-in VHF channel 3 modulator.



cluding listing control, escrow control, sales controls, general ledger and property management. Optional subsystems for accounts payable and payroll are available.

Since no special codes, abbreviations or "computerese" appear to the user, no data processing expertise is necessary to use the system.

The minimum system provides for up to 300 listings, 100 sales associates and 10 offices or sub-offices. Priced at \$2,500 for the whole system and \$500 for each subsystem, the package is sold by Key Systems, Inc., 16 Ocean E., Marathon, FL 33050.

Reader Service ✓ 184.

Programs Can Share Data

Percom Data is marketing a TRS-80 Disk BASIC utility that allows programmers to save, restore and otherwise manipulate one set of data that may be common to two or more programs.

Called Varkeep, this machine language utility works with all TRS-80 computer disk operating systems.

Varkeep adds four BASIC commands: NAME SAVE, NAME RESTORE, NAME DELETE and NAME CLEAR. They protect variables from being erased by LOAD, RUN, NEW and CLEAR commands. They delete variables that are no longer needed to reclaim memory space and redimension arrays.

Varkeep is sold on a minidisk with instructions for \$19.95. It may be purchased from Percom Data Co., 221 N. Kirby, Garland, TX 75042.

Reader Service ✓ 171.

Hardcopy from Typewriters

The I/O Pak and a new typewriter interface, are designed to generate hard computer copy through any electric typewriter with powered carriage return. The combination gives computer users the benefit of typewriters' print quality.

The I/O Pak, which fits over the keyboard,

is easy to install. No modification to the typewriter is required. The interface board can be modified by jumper selection, to operate on TRS-80 Level I or II or Apple II.

The I/O Pak alone costs \$469. The interface board and power supply required for package system operation cost \$145. They are available from Rochester Data, Inc., 3100 Monroe Ave., Rochester, NY 14618.

Reader Service ✓ 162.

Labyrinth Racing Game

Labyrinth Run, Manhattan Software's latest release, is a fast-action game, running through a labyrinth with sharp turns, reverses and slaloms, racing for a record time. Each labyrinth has sprint and full courses, and there are three levels of skill.

A timer starts automatically when the run begins, and record times are retained and displayed for each labyrinth, course and skill level.

The game is for Level II 16K machines. It costs \$9.95 from Manhattan Software, Inc., P.O. Box 5200 Grand Central Station, NY, NY 10017.

Reader Service ✓ 179

Interactive Sharing

A multiplexer has been announced by Corvus Systems which can transform two to 64 microcomputers into an interactive multi-user network. The multiplexer network can share high speed access to up to 40 million bytes of hard disk capacity. It is called the constellation. Computers in a Constellation network can also share peripherals and communicate in a fully interactive mode.

The Constellation is a back-end local network in which multiple computers are connected in a star configuration. To insure compatibility, each computer interface uses the standard Corvus bus. This central node contains hardware that polls up to eight computers in round robin fashion.

Any computer compatible with the standard Corvus disk system is compatible with the Con-

stellation. These include the Apple, TRS-80 Models I and II, S-100 Bus, Altos, and LSI-11.

The computer interface hardware is the same as that used by the single-user disk system. The Constellation operating system software is the unmodified operating system provided with the host computer, assuring application compatibility.

The price of the multiplexer is \$750. Interfaces for the computers in the network begin at \$235 each from Corvus Systems, 2029 O'Toole Ave., San Jose, CA 95131.

Reader Service ✓ 165.

Cassette Peripheral

Zoom 3.6 is an electronic black-box that connects a Level II TRS-80 (or expansion interface) and a CTR-41 or CTR-80 cassette recorder. With the software supplied with it, tapes can be written and read in a special format at 3600 bits per second—over seven times faster than Radio Shack's 500. At that speed, 2K of RAM loads in under five seconds, and 16K loads in just 36 seconds—instead of almost four-and-a-half minutes.

No soldering and no modifications are needed. Zoom 3.6 is transparent to all the XRX mods, and to the CLOAD, CSAVE, SYSTEM, and PUNCH functions. A built-in relay and a toggle-switch on the front panel bypass the Radio Shack reed relay.

The computer will not crash if it finds a read error or if it is made to start or stop reading in the middle of a recording. The system will not hang-up while searching for a file. BREAK causes a return to the menu during reads and writes.

Users can also purchase the commented source-code for ZMBUG, so that it may be adapted, or relocated. Written instructions plus a sample of assembly language source-code necessary to patch Zoom 3.6 drivers into The Electric Pencil, are also sold.

The manufacturer believes Zoom 3.6 is the fastest CTR-41/CTR-80 device available. With ZMBUG V1.0 object code and the manual, it costs \$119 and is sold by Zoom!, P.O. Box 3766, Nashua, NH 03061.

Reader Service ✓ 163.

The I/O Pak



Zoom 3.6 and ZMBUG



Apparat, Inc.
introduces

NEWDOS 80

For the 80's —
an enhanced NEWDOS
for your TRS-80™
Model 1.



Apparat, Inc., announces the most powerful Disk Operating System for the TRS-80®. It has been designed for the sophisticated user and professional programmer who demands the ultimate in disk operating systems.

NEWDOS/80 is not meant to replace the present version of NEWDOS 2.1 which satisfies most users, but is a carefully planned upward enhancement, which significantly extends NEWDOS 2.1's capabilities. This new member to the Apparat NEWDOS' family is upward compatible with present NEWDOS 2.1 and is supplied on Diskette, complete with enhanced NEWDOS + utility programs and documentation. Some of the NEWDOS/80 features are:

- New BASIC commands that supports files with variable record lengths up to 4095 Bytes long.
- Mix or match disk drives. Supports any track count from 18 to 80. Use

35, 40 or 77 track 5" mini disks drives or 8" disk drives, or any combination.

- A security boot-up for BASIC or machine code application programs. User never sees "DOS READY" or ">READY" and is unable to "BREAK", clear screen, or issue any direct BASIC statement including "LIST".
- New editing commands that allow program lines to be deleted from one location and moved to another or to allow the duplication of a program line with the deletion of the original.
- Enhanced and improved RENUMBER that allows relocation of subroutines.
- Powerful chaining commands.
- Print Spooler.
- DFG function; simultaneous striking of the D, F and G keys will allow the user to enter a mini-DOS to perform some DOS commands without disturbing the resident program. (e.g. dir while in scripsit.)

- Upward compatible with NEWDOS 2.1 and TRSDOS 2.3.

- Includes machine language Superzap/80 and all Apparat 2.1 utilities.
- Enter debug any time by pressing 123 keys. Also allows disk I/O.
- Diskette "Purge" command.
- Specifiable system options (limited sysgen type commands).
- Increased directory capacity.
- Copy by file commands.

NEWDOS/80 with all of the NEWDOS + utility programs, many of which have been enhanced, is priced at just \$149.00 and is available at most TRS-80 dealers.

As with 2.1, NEWDOS/80 relies on the TRSDOS and Disk Basic Reference Manual published by Radio Shack. NEWDOS/80 documentation supports its enhancements and upgrades only.

✓ 264



Apparat, Inc.



MICROCOMPUTER
TECHNOLOGY
INCORPORATED

✓ 28



TO PURCHASE NEWDOS/80, COMPLETE AND MAIL TO:

Apparat, Inc.
4401 S. Tamarac Parkway
Denver, CO 80237
303/758-7275 303/741-1778

— OR —

Microcomputer Technology, Inc.
3304 W. MacArthur Blvd.
Santa Ana, CA 92704
714/979-9923

☐ Check ☐ Money Order ☐ Master Charge ☐ Visa

Card No. _____ Expiration Date _____

Cal. residents add 6.5% sales tax. Cal. residents add 6% sales tax.
Add \$10.00 postage and handling.

Please rush _____ NEWDOS/80 @ \$149 EACH TO:

Name _____

Address _____

City _____ State _____ Zip _____

Phone _____

0/1A


TRS-80 Pinball

Acorn Software Products, Inc. is offering Pinball, a real-time, arcade game for Level II TRS-80.

The video display includes flippers, bumpers, rollovers, runs and bonus points. The space bar releases the ball. As with any pinball games, the player must develop skill with the flippers to get maximum points and playing time.

Pinball is priced at \$14.95 on cassette, or \$20.95 on disk from Acorn Software Products Inc., 634 North Carolina Avenue, S.E. Washington, D.C. 20003.

Reader Service ✓ 161.

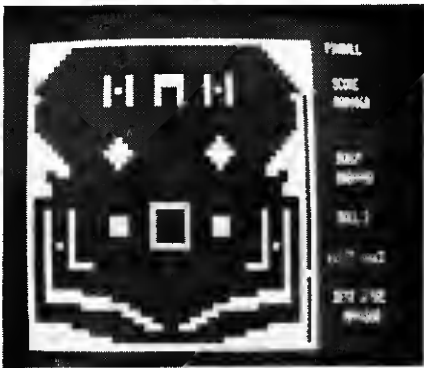

Pinball Display

Educational Program and Model II COBOL Package

The new COBOL Development System software package from Radio Shack makes it possible to write and use programs in COBOL (Common Business Oriented Language) on the TRS-80 Model II. Tandy believes it is the only COBOL package for a microcomputer that offers multi-key ISAM (Index Sequential Access Method) files.

The COBOL package includes a one-pass compiler, screen formatting, ANSI Level 2 I/O, program linkage and segmentation.

The Model II COBOL Development System, with reference manual, user's guide, sample program and disk is priced at \$299.

The K-8 (kindergarten through eighth grade) Math Program, designed to supplement regular instruction, is another new release from Radio Shack. It is supplied on five cassettes and three disks in a binder with a teacher's manual containing complete instructions and sample record-keeping forms. It requires a 16K Level II.

Part one of the program is a series of computer programs containing skill building exercises in numeration, addition and subtraction concepts for use in kindergarten through third grade. Part two contains skill building exercises, a testing mode, and a placement mode for addition, subtraction, multiplication and division, appropriate for use in grades one through

eight.

A comprehensive reporting function is also provided. At the end of a student session, the screen displays the total number of problems attempted, the number correct, the percent correct, promotions or demotions and average response time. It is priced at \$199.

Reader Service ✓ 166.

Two Utility Programs

Two new TRS-80 programs from Allen Gelder Software are Super Step and Accel. Super Step is both a trace program and a disassembler link with T-BUG, the Radio Shack Z-80 monitor program.

Super Step displays a pair of Z-80 processor models including CPU registers, stack elements, flag expansion and an intelligent RAM window. The trace mode has a skip key and keyboard interrupt plus foreground breakpointing for user control during operation. It is sold for \$19.95.

Accel is a compiler for the integer subset of Level II BASIC that increases the speed of program execution. Programs are built, modified and debugged using the BASIC interpreter, then compiled by Accel to Z-80 machine code.

Accel is a product of Southern Software of England. It is now sold in this country for \$44.95 from Allen Gelder Software, Box 11721, San Francisco, CA 94101.

Reader Service ✓ 170.



Super Step

Word Processor Update

MPS Software (formerly Microphase Systems) is selling Wordscribe, a full-feature word processing system for Model I and Model II systems. Wordscribe 1.2 includes the full editing features of 1.1 and adds some new formatting capabilities to the system.

Wordscribe's new features include document chaining which allows the user to load more than one document at a time for merging documents and inserting standard blocks of text. New formatting commands to change line lengths, force page breaks and change line spacing are also included.

The minimum system requirements to run Wordscribe 1.2 are Model I 48K with expansion interface and one disk; or Model II 64K with one disk.

Wordscribe is priced at \$79.95 for Model I, \$129.95 for Model II and is available from MPS Software, 11223 E. 45th St. So., No. 314, Tulsa, OK 74145.

Reader Service ✓ 180.

Software Typewriter

Computer Simulations Company has announced its newest product for microcomputers, the TRS-80 Typewriter. It is a basic program offering built-in lowercase, line by line editing, video review and copy printing.

The program is designed to handle a full page of text neatly and efficiently. It sells for \$19.95 and requires a printer.

The TRS-80 Typewriter is available from Computer Simulations Company, 305 Hammes Ave., Joliet, IL 60436.

Reader Service ✓ 183.


Keyboard Remote Control

Omni Automation is releasing a wireless keyboard for the TRS-80. The RX-10 includes a hand held, ultrasonic remote control. BASIC programs can read ultrasonic input with a few minor changes.


The system also permits control of remote devices located anywhere within the home or office. A flexible scheduling program can activate the remotes automatically using cyclic, time of day, or future date schedules.

The RX-10 system includes all necessary cables, interfaces, a cordless controller, a command console, appliance and lamp control modules. Software is provided on diskette. It is priced at \$285 from Omni Automation, P.O. Box 7716, Atlanta, GA 30357.

Reader Service ✓ 178.

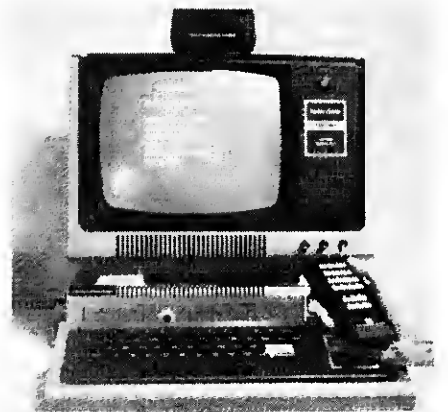

RX-10 Wireless Keyboard



AUTHORIZED TRS-80® DEALER A301

COMPUTER SPECIALISTS



**10%
DISCOUNT
Off
List**
26-4002
64K 1 Drive
\$3499.00



CENTRONICS

Fast 100 CPS Centronics
730 Printer - \$675.00
Text Quality Centronics
737 Printer - \$850.00

MICROSOFT

Model I Basic Compiler.....\$195.00
Model II Basic Compiler.....395.00

26-1056 16K Level II System with Keypad.	\$ 700.00
26-1145 RS-232 Board.....	84.00
26-1140 "Q" K Interface.....	254.00
26-1141 "16" K Interface.....	381.00
26-1142 "32" K Interface.....	508.00
26-1160 Mini Disk - Drive 0.....	424.00
26-1161 Mini Disk - Additional.....	424.00
26-1154 Lineprinter II.....	720.00
26-1156 Lineprinter III.....	1799.00
26-1157 WP50 Daisy Printer.....	2670.00
26-1180 Voice Synthesiser.....	339.00
26-1181 VQX8CX.....	145.00
26-1104 Factory Upper/Lower Case Modifaction Installed.....	90.00
26-1605 Scripsit - Tape.....	60.00
26-1563 Scripsit - Disk.....	85.00

ALL OTHER R.S. SOFTWARE
FURNITURE, STANDS, CABLES
AND ACCESSORIES DEDUCT
10% FROM CATALOG PRICE

Novatian Cat Modem...\$159.00
CCA Data Management
System.....72.00
Adventure Games
Games 1-9.....14.00



BASF

10-5 1/4 Diskettes.....\$45.00
10-8" Diskettes.....47.00



Plug Compatible Lobo 5 1/4
Drives - \$375.00

Versatile Lobo Interface,
8" Drives and Hard Drive.
Call For Prices



**Acorn
Software
Products, Inc.**

GAMES:
Alien Invasion.....\$9.00
UTILITIES:
System Savers.....14.00
EDUCATION:
Language Teacher.....18.00

1-800-841-0860 Toll Free Order Entry

MICRO MANAGEMENT SYSTEMS, INC.

No Taxes an Out Of
State Shipments


Immediate Shipment
From Stock.

DOWNTOWN PLAZA SHOPPING CENTER
115 C SECOND AVE. S.W.
CAIRO, GEORGIA 31728
(912) 377-7120 Ga. Phone No.

*TRS-80 is a registered trademark of the Tandy Corp.

Full Factory Warranty
on All Items Sold.

Largest Inventory
In the S.E. U.S.A.

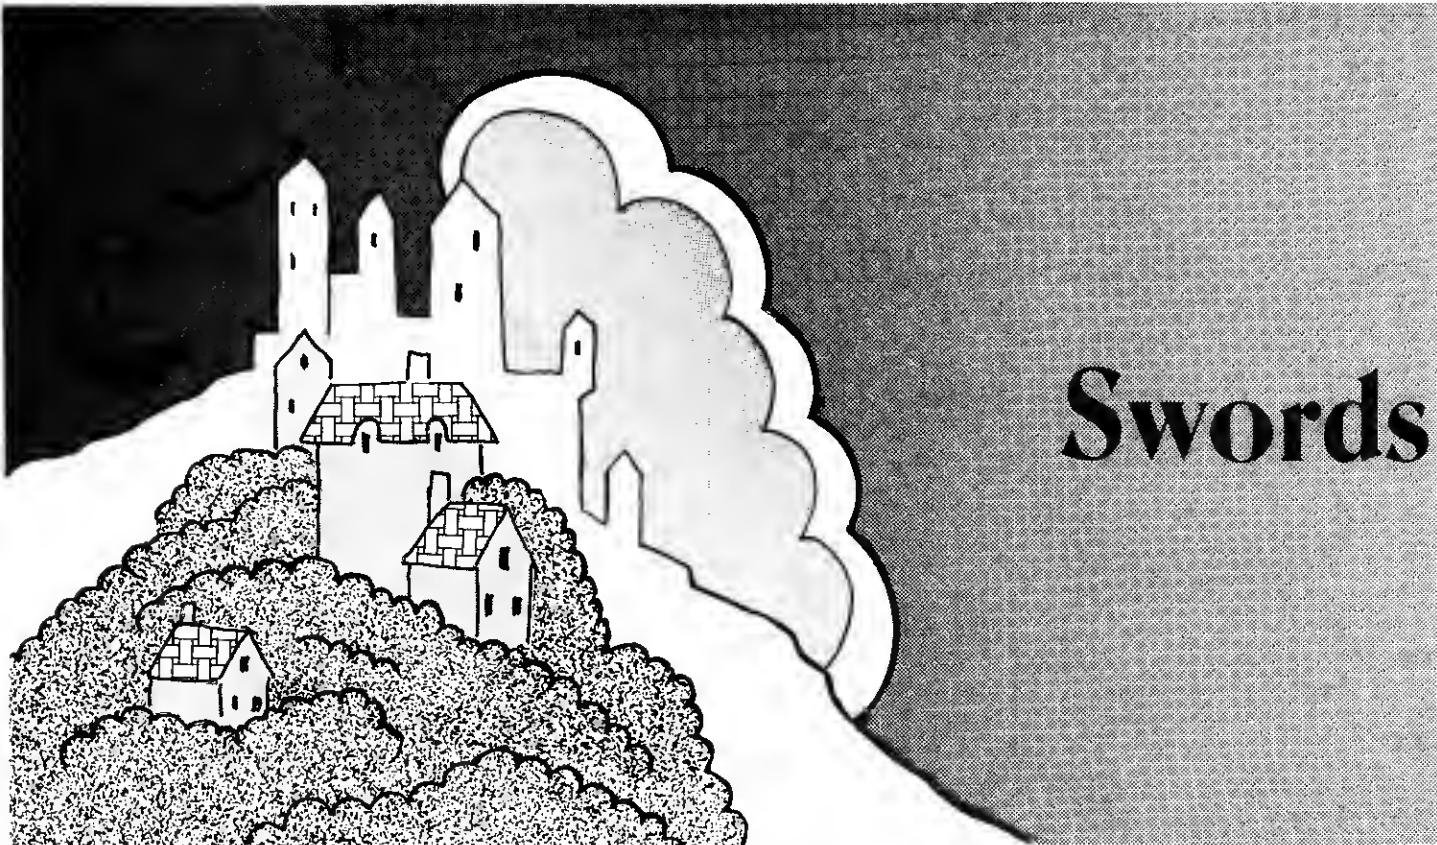

Barry L. Adams
109 Valley Place
Greenville, NC 27834

The August 1978 issue of *Kilobaud Microcomputing* magazine carried a game program entitled *Swords and Sorcery*. The program was written on an SWTP 6800 machine using an 8K BASIC interpreter. The game involves you in a search and rescue of a princess held in an evil captor's dungeon. During the quest, the player encountered a variety of creatures — some good, some bad.

I immediately fell in love with the program and soon adapted it to my Level II, 16K machine. As written, the listing required less than 8.5K of memory. When it comes to writing game programs, I generally followed the advice of my old art teacher: When you're painting a picture fill up the entire canvas, after all, you're paying for it.

Armed with this bit of philosophy and a great deal of unused space in my 16K memory, I set out to paint my canvas.

New Dimensions

The revised program still follows the overall theme of the original, but adds more dimension to the encounters that pop up during play. The program uses TRS-80 graphics and includes a few new adversaries. Whereas the original program is primarily random based, the revised program also includes the elements of skill, strategy and awareness.

The scenario of the game is familiar. In typical fairy tale fashion, you are an impoverished, rather inept hero, attempting to rescue an elfin princess who has been imprisoned in a dungeon located deep within the Old Forest. When you begin your quest, you are equipped with only a small sword and some provisions.

Prior to entering the Old Forest you may be offered assistance from a dryad, as well as the counseling of the Great Oracle. The nymph is a real plus as she makes an excellent guide and can be helpful in combat with the trolls. However, be careful not to offend her, because she can turn that magical power on you with a curse.

The oracle, on the other hand, appears to be more interested in

the maidens you're bringing rather than helping. Nevertheless, once appeased, he can point you in the right direction.

Before you start your journey, familiarize yourself with two units of measure in this little magical world: the Yerb and the Farbble Warfer. Both are measures of distance. Legend has it that the measure was defined as the distance between Ezekiel Yerb's house and that of Hansel Farbble Warfer. One man was short and the other rather tall, and as a result the two could never agree on the number of steps between the two houses. The sense of the whole thing has long since been lost, and, today, all we know is that 1 Yerb is equal to $\frac{3}{4}$ of a Farbble Warfer.

While on your journey, you will meet a number of different critters. The full cast of characters is as follows:

Nymph: She knows the Old Forest like the back of her hand and is very good in fights with trolls.

Hot dog salesman: Ha! You thought that you could get away from them, yet here they are. Don't laugh! One of these gastronomical marvels can keep you going long after your provisions have given out.

The Great Oracle: Generally, he has more interest in what you can do for him, rather than what he can do for you. However, he may tell you the correct path to take.

Slave girls: They provide conversation and something for the satyrs to look at; otherwise, they do little but cut into your provisions.

Rats: They will give you the willies and make you run, but otherwise are of little consequence.

Snakes: A snake bite will lay you up for a day.

Spiders: They will attack, unless you can outrun them.

Dragons: Dragon slaying is still big news with big rewards, but be careful, because these guys have been known to flick their Bics.

Goblins: You can be startled by them and run, otherwise, they will enslave you, sell you to the satyrs or let you go free for ransom.

Trolls: There are two kinds of trolls—your everyday run of the mill troll and the dreaded warrior trolls. The common trolls are

and Sorcery II

"Once you have rescued the princess, you no longer have the choice to fight or not fight . . . To make it to safety, you have to fight your way out."

pesky fighters, particularly dangerous in the early going, while the warrior trolls are bad news all of the time.

The Necromancer: The chief heavy and captor of the princess, as well as the all-around bad egg.

Elements of the Fantasy

The other elements of the fantasy consist of the pits into which one occasionally tumbles, gold coins and an enchanted sword. As you might have guessed, the pits are an obstacle from which you must escape either by climbing or yelling for help. The gold that you pick up along the way is used to buy food, pay ransom and provide you with a little bank roll should you be lucky enough to complete your quest.

Of course, there is a "Catch 22." The weight of all that gold is somewhat of an encumbrance to combat and inhibits your fighting ability. The enchanted sword, on the other hand, enhances your fighting ability. In fact, you are usually in big trouble if you don't have it.

A player's fighting skill develops as he is successful in combat. A player increases his fighting ability in combat with common trolls, satyrs and dragons. But there are degrees of improvement. More fighting ability is acquired by slaying dragons than trolls. However, a similar gain is made when either a troll or a satyr runs from you.

In like fashion, your own fighting ability is diminished when you run from combat. Dragon fighting is the only exception. It's your choice. You can walk away from it any time.

Considerable fighting ability is usually necessary to defeat a warrior troll. But after fighting one of the super trolls, you are usually so frazzled that your fighting ability has been reduced.

The playing instructions are simple. Prior to loading the program from cassette, set the memory size to 32697 in order to reserve room for the dragon's graphics code. If you are already up and running you can get back to MEMORY-SIZE? without powering down by entering the SYSTEM command followed by a 'ENTER'.

Initially, entering RUN will get the introductory title and the


familiar READY. At that point the first five lines of the program are automatically deleted. Entering RUN thereafter initiates the main program. This is done to conserve memory, providing an additional 600 or so bytes.

The INKEY\$ command is used to eliminate the repeated use of the ENTER key where possible.

There are questions which require word answers: RUN, YES, NO, CLIMB and YELL. Only the first letter of the word need be typed. In two cases a prompt answer is important — encounters with either the spiders or the dragons. To avoid attack from a spider, the player must strike the R key as quickly as he can. In the case of the dragon, the rescuer is moved toward and away from the dragon by using the less than and greater than keys, respectively. Any other key will stop the rescuer where he is.

Once you have rescued the princess, you no longer have the choice to fight or not fight common trolls. To make it to safety, you have to fight your way out.



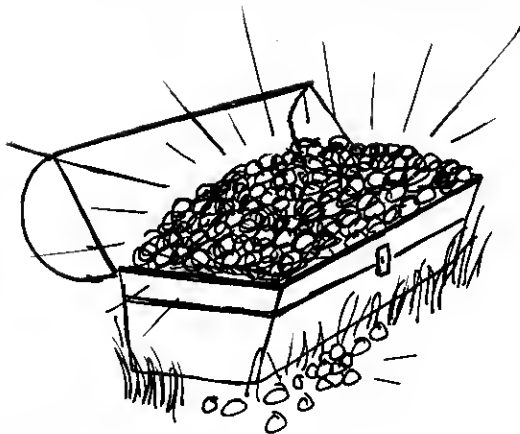

The Listing

There are several lines that contain IF statements like IF F PRINT "THE NYMPH GOES MAD" (line 900). This is not a mistake, but a memory-saver and is permissible because numerical IF statements test for a non-zero value. F, in this case, can only be a 1 or a 0.

The revised program requires nearly all of your 16K memory. To further conserve memory, no REM statements are used except for the listing title. However, the program has been written in, more or less, block format with a PRINT statement introducing each block. Table 1 lists those blocks. That should be enough to start you on your search for the dungeon, the princess and a typical fairy tale ending.

Have fun, but watch out for the onions on those hot dogs — they are murder. ■

LINE NUMBERS	DESCRIPTION
1-11	introductory title; set up dragon's graphics code
14-30	Initialize variables; main program entry point
65-70	random number seed
85-105	timer gallery
110-115	question routines
120	set up for nymph
125-170	Great Oracle
180-195	set up of main program loop
200	main loop entry point
220-240	nymph guidance and lot casting
250-270	path choosing
280	enchanted sword
290	snake in the grass
300	check for dungeon and trolls
310	check for rats
320	check for dragons
330	check for pit
335	check for the dungeon
340-360	something is in the bushes
370	check for Necromancer and satyrs
390-400	gold
410	slave girl
420	check for dungeon
430	check for pit
440	dead end
500	nymph's mad
530-540	travel advisory
550-556	check on provisions
570-600	captured by goblins
610-695	dungeon
700-745	run of the mill troll
750-790	Satyrs
800-885	the pits
900-910	Necromancer
950	rats
960-1095	Warrior Troll
2000	something is in the bushes
2100-2120	spider
2300-2350	surprise goblin
2400-2430	the hot dog salesman
3000-4200	dateline: news story

Table 1. Block format for Swords and Sorcery II.

```

1 CLS:PRINT@278,"SWORDS AND SORCERY II":PRINT@400,"BY B
ARRY L. ADAMS":PRINT@467,"GREENVILLE , NORTH CAROL
INA":PRINT@586,"BASED UPON A PROGRAM WRITTEN BY B
RUCE TURRIE"
3 PRINT@656,"PUBLISHED IN THE AUGUST 1978 ISSUE":PRINT@
735,"OF":PRINT@791,"KILOBAUD MAGAZINE":PRINT
5 FOR X=32767 TO 32769 STEP-1:READ Z:POKE X,Z:NEXT:FOR
X=32768 TO 32697 STEP-1:READ Z:POKE X,Z:NEXT:DELET
E 1-11
10 DATA 160,190,191,180,184,191,191,191,191,191,188,144
,160,186,191,191,191,191,191,191,191,191,191,191,1
91,191,168,188,144,160,190,191,147,175,191,191,191
,191,191,191,191,191,159,131,179,191,181,160,190,
191,151,160,191,191,168,191,186,170
11 DATA 188,188,191,190,189,131,131,131,170,191,170,191
14 REM
SWORDS AND SORCERY II
15 CLS:
CLEAR 250:DEFINT L:XX=458:GOSUB 65:FOR X=1TO9:READ
Y,Z:A(X)=Y:B(X)=Z:NEXT:DATA 15898,3,15961,7,16023
3,16,16086,17,15969,4,15907,2,15044,1,15781,0,1571
R$=" OUR BUNGLING HERO "
20 RANDOM PA=2:B$(1)="CLANK ":B$(2)="SLASH ":B$(3)="WOO
SH ":B$(4)="BONG ":B$(5)="CRASH ":B$(6)="BING ":B$
(7)="CLANK ":S$(1)=CHR$(160)+CHR$(183)+CHR$(181)+C
HR$(183)+CHR$(181)+STRING$(60,32)+STRING$(4,149):
HR$(149):K$=CHR$(132)
25 S$(2)=CHR$(176)+CHR$(144)+CHR$(176)+CHR$(144)+STRIN
G$(59,32)+CHR$(162)+CHR$(135)+CHR$(151)+CHR$(151)+C
HR$(167):FOR Y=1TO5:FORX=1TO5:READ Z:E$(Y)=E$(Y)+C
HR$(Z):NEXTX,Y
30 E$(6)=CHR$(156)+ " "+CHR$(156):E$(8)=" " :E$(7)=C
HR$(135)+ " "+CHR$(135):E$(9)=" " :E$(10)= " ":FOR X
=1TO7:READ Y:E3$=E3$+CHR$(Y):NEXT:FOR X=1TO7:READ
Y:E4$=E4$+CHR$(Y):NEXT:GOTO70
65 CLS:PRINT@XX,CHR$(23),"SWORDS AND SORCERY II":PRINT:
RETURN
70 PA=10:PRINT"ENTER A NUMBER BETWEEN 1 AND 9":GOSUB115
:A=AN:PA=0:FOR X=1TOA:PN=RND(A+5):NEXT:PA=0:GOSUB9
0:CLS:GOTO120
80 RETURN
85 FOR T9=1TO50:NEXT:RETURN
90 FOR T9=1TO100:NEXT:RETURN
95 FOR T9=1TO300:NEXT:RETURN
100 FOR T9=1TO500:NEXT:RETURN
105 FOR T9=1TO1000:NEXT:RETURN
110 AS=INKEY$:IF AS$="" ,110 ELSE AN=ASC(AS):IF AN=89 OR
115 AS=INKEY$:IF AS$="" ,115 ELSE AN=VAL(AS):IF AN>PA,115
ELSE PA=2:RETURN
120 IF RND(PN)*2<=RND(PN)*RND(2) GOSUB65:PRINT"A DRYAD
HAS OFFERED TO BE YOUR":PRINTTAB(12);"GUIDE":PRINT
TAB(6);" DO YOU WISH IT ?":GOSUB110:GOSUB90:IF AN=
=89,F=1 ELSE IF RND(0)>.2 GOSUB65:GOSUB 500:GOSUB1
HR$(149):K$=CHR$(132)
125 CLS:XX=266:GOSUB65
130 W=F:PRINT" THERE ARE THREE PATHS INTO THE OLD FORES
T, HOWEVER, ONLY ONE IS TRUE THE OTHERS ARE FOUL
AND":PRINTTAB(4);"REEK OF MISERIES UNTOLD":PRINT:
C=RND(3):Y=RND(3):IF RND(0)>.4,Y=C
140 PRINT"DO YOU WISH TO CONSULT THE GREAT":PRINTTAB(1
2);"ORACLE ?":GOSUB110:IF AN=78,180 ELSE CLS:XX=20
2:GOSUB 65:PRINT:PRINT"AHAI TO GAIN FAVOR WITH THE
E FAT ONE AND GET THE POOP YOU NEED YOU MUST F
APPEASE HIM.":PRINT
150 PRINTTAB(2);"HOW MANY MAIDENS SHOULD BE":PRINTTAB(1
0);"SACRIFICED":INPUTMD:IF RND(MD)<RND(PN) PRINTT
AB(1);"OH OH THE ORACLE IS OFFENDED":K=K-1:GOTO160
155 IF RND(0)>.4,(MD/10),165
160 PRINT"THE SIGNS ARE UNCLEAR - YOU MUST ":GOTO170
165 PRINT:PRINTTAB(5);"THE ORACLE SAYS PATH":Y:PRINTTAB
(5);"IS THE PATH OF TRUTH":P=1
170 IF F AND RND(MD)>RND(PN)*RND(PN) GOSUB500
180 PRINT:PA=3:PRINTTAB(5);"CHOOSE PATH 1,2 OR 3":GOSUB
115:X=AN:L=RND(100)+100:IFX<>C,K=K-1:L=L+50 ELSE K
=K+1
190 K=X+.5*RND(0)+F+P+.2*M*SGN(5.1-M):DT=L
195 CLS:PRINTTAB(21);"SWORDS AND SORCERY II":PRINT
200 PRINT:PRINT"YOU HAVE COME TO A FORK IN THE PATH":C=
RND(2):Z=W-F:S=8-Z-G/(1+Z):IF S<4,S=4
210 IF RND(3)>K,L=L+1
220 L2=7+RND(20):LO=L2:IF F PRINT"PERHAPS YOU WOULD LIK
E TO ASK THE NYMPH ?":GOSUB110:IF AN=78,250 ELSE I
F RND(0)>.5+K/50 PRINT"SHE DOESN'T KNOW":GOTO 250:
ELSE PRINT"SHE SAYS PATH ":C:GOTO250
230 PRINT"WILL YOU CAST LOTS TO DECIDE ?":GOSUB110:IF A
N=78,250 ELSE PRINT"THE LOTS SAY YOU SHOULD TAKE P
ATH":IF RND(0)>.5+K/10 X=3-C ELSE X=C
240 PRINTX
250 PRINT"WHICH WAY DO YOU WISH TO PROCEED PATH 1 OR 2
?":GOSUB115:B=0:IF X=C,K=K+RND(0)*SGN(.5-RND(0)):
D=0:GOTO270
260 K=K-.2,D=-1
270 L2=L2-S
280 I=I+1:IF E=0 AND RND(0)<.15+.2*F PRINT:PRINT" WHAT
LUCK I YOU HAVE HAPPENED UPON ONE OF THE ENCHANTE
D SWORDS OF THE OLD ONES":K=K+.2:E=1:PRINT
290 IF RND(0)-.5*(F+D)>.95 PRINT:PRINT" S N A K E I I I I I

```


TBS80 DATA PROCESSING SYSTEMS. ONE STEP BEYOND.

If you thought the TRS-80™ microcomputer was just a toy, think again. These **TBS80** software systems will turn that computer into a **powerful data processor**.

INFORMATION SYSTEM by Dale Kubler is simply the best in-memory, data base manager on the market. It allows you to create files with up to ten fields per record, up to 40 characters per field and 200 characters total per record. Data from the keyboard is entered directly onto a screen display of one entire file.

Once entered, you can sort or search your entire data base by any category and have the information desired displayed on the screen. **INFORMATION SYSTEM** provides a thorough editing mode allowing changes by line without rewriting an entire file. This program allows you to program your own printouts to almost any form you desire for line or serial printers. Screen prints from anywhere in the program are also available.

INFORMATION SYSTEM creates either disk or cassette files depending upon the version you use. From mail lists to recipes, this program is the ideal small system information manager. The price for this program, 32K up disk is \$49.50. For systems 16K up tape it's \$39.50.

DATA MANAGER by Dale Kubler starts out where **INFORMATION SYSTEM** leaves off. Requiring 48K and one disk, it accepts up to 20 user-defined fields with up to forty characters per field and 800 characters per record. As with all TBS software, data entry and editing is professional and simple to use. What makes this program stand apart from "in-mem" data managers is that it uses up to four disks on line as memory, or as much as 320K of memory to storage. Because disk sorts take more time than in-mem sorts, **DATA MANAGER** enables the user to create and maintain up to 5 "key" sort files for quick access of data. A utility program is provided to calculate the number of records possible since the amount of records you can maintain is dependent on a number of variables. This program also supports the upper/lower case modification, and printouts can be programmed to almost any format and sent to line or serial printer. Background printing is provided enabling the computer to search and print at the same time. If you already have **INFORMATION SYSTEM**, **DATA MANAGER** will accept those files.

A necessity for organized people, this program sells for \$74.95. **BUSINESS MAIL SYSTEM** by Dale Kubler is designed for large-scale business users. Requiring 32K, two disks and printer, this program will store up to 150,000 names in a single file spread out over multiple disks. Each data disk holds 500 names. After data entry, BMS automatically sorts the data by zip code and alphabetical order within the zip code. The program tells you when and which data disk to insert, expanding your files automatically until you've reached 300 disks. Data is input directly onto formatted screen display with the option to use Company Name/Attention instead of Last Name/First Name. Three numeric and one alpha code fields are provided to help you use the search and printout mode. **BUSINESS MAIL SYSTEM** allows you to

™ TRS-80 is a trademark of the Tandy Corporation.



program the number and spacing of your labels. With more features than can be described here, this high-powered program sells for \$125.00.

TEXT MERGE is the program that puts it all together. If you have the **ELECTRIC PENCIL** from Michael Shroyer, 48K and one disk drive, then this program is a must. It will merge your data base from any of the above programs with an Electric Pencil file. For example, when you write a letter that is going to several hundred people, you can "code" it by entering a field name from the above programs in place of the actual information. Then, when **TEXT MERGE** is run, it will print out your Pencil file and substitute the "code" with the actual data. In other words, you can print out 1,000 personalized letters without stopping the computer. This program will also enable you to selectively search out only the records from your data base that you wish to use. Also included is the ability to set left, right, top and bottom margins, set page numbers anywhere on the page, and print out right justified if you so choose. **TEXT MERGE** will turn your computer into a powerful data processor and it sells on disk for \$99.95.

TBS has other incredible software for Tandy's microcomputer. Intent on making it a powerful tool, we have **large scale business accounting systems, general accounting systems, system utilities** and the **Library 100**. We have the only **DISK HEAD CLEANER** (for APPLE too!) and **GRAN MASTER DISKETTES**, the best on the market.

TBS is **YOUR COMPANY**, and we build systems, not just software. The above products are available now, nationwide. Visit your local Computer Dealer or Associate Radio Shack Store and demand the best, demand TBS. For more information, contact us through the numbers below.



THE BOTTOM SHELF, INC.
751 DeKalb Ind. Way • Decatur, GA 30033
(404) 296-2003


```

      ORRY, YOU BLEW IT !":ELSE PRINTTAB(28);" OOOO !":G
      GOSUB 105:PRINTTAB(19);"YOU DID IT ! HE'S DOWN !!
      SUB105:RETURN
1045 PRINT:PRINTTAB(23);"YOU'RE FINISHED !":GOSUB105:G
      OTO3000
1050 X=RND(5):IF X=1 PRINT"YOU STOP HIS BLOW WITH YOUR
      SWORD AND BACK AWAY !":GOTO1085:ELSE IF X=2 PRINT
      "YOU DUCK UNDER HIS SWORD - VEER FROM HIS MACE AND
      D ATTACK !":GOTO1070:ELSE IF X=3 PRINT"YOU PARRY T
      ATTACK !":GOTO1070
1060 IF X=4 PRINT"YOU KICK HIM IN THE SHINS AND SCAMPER
      AWAY !":GOTO 1095:ELSE IF X=5 PRINT"YOU STOMP HIS
      TOES WITH YOUR BOOT !":GOTO1095:ELSE PRINT"YOU SL
      LASH LEFT !":IF RND(3)=1 PRINT:ELSE PRINT"YOU SLA
      IGH T !"
1065 PRINT"THEN THRUST STRAIGHT FOR HIS KNEES"
1070 FORX3=1TOH3:IF RND(0)<=.1 PRINT"YOU MISSED HIM !!!
      1":ELSE X=RND(H3):IF X=1 PRINT"YOU GOT HIS LEG !":
      W2=W2-(DS+H2/5):W3=W3-(DS+H2/5):ELSE IF X=2 PRINT"
      "YOU'VE SLASHED HIS ARM":W2=W2-(DS+H2/3):W3=W3-(DS
      5)
1075 IF X=3 PRINT"YOU SCORE TO HIS BODY !":W2=W2-DS:W3=
      W3-(.05+DS)
1080 NEXTX3
1085 IF W2<.1,W2=.1
1090 IF W3>.05,980 ELSE PRINT"HE'S DOWN !!!!!":PRINT"YO
      U'VE FINISHED HIM OFF!!":GOSUB105:DS=DS+RND(0):RET
      URN
1095 W2=W2-(DS*RND(0)):W3=W3-(DS*RND(0)):GOTO1085
2000 PRINT"HOLD IT !":GOSUB90:PRINT" THERE'S SOMETHI
      NG MOVING BEHIND THAT BUSH !":GOSUB90:R4=RND(5):
      ON R4 GOSUB 700,2100,2200,2300,2400:RETURN
2100 CLS:PRINT@154,"GEEZE !!!!!":GOSUB95:PRINT@279,"A HU
      GL SPIDER !":PRINT@384,"QUICK ! R":RN=RND(10)+P
      N:U2=0
2110 AS=INKEY$:PRINT"U":U2=U2+1:IF U2=RN,2120 ELSE IF
      AS=" ",2110 ELSE IF AS<>"R",2110 ELSE PRINT"N":GOSU
      B90:CLS:PRINT@478,"WHEW !":RETURN
2120 PRINT@347,S$(1):GOSUB90:PRINT@347," ";PRINT@4
      12,S$(2):GOSUB90:PRINT@412,S$(1):PRINT@604,"SLURP
      !":GOSUB90:PRINT@663,"BU":FOR X=1TO10:PRINT"R":
      :NEXT:PRINT" P !":GOSUB100:PRINT" HIC !":GOSUB1
      4=2:GOTO3000
2200 PRINT"HMMMMMMMMM . . . . . SURE IS WARM ?!":G
      OSUB100:CLS:PRINT@468,CHR$(23);"YIEPE !!!!!":GOSUB9
      0:PRINT@524,"IT'S A DRAGON !!!!!":GOSUB95:CLS

```

```

2210 W3=0:FOR X2=1TO9:GOSUB 2290:NEXT:W3=0:X6=32709:X4=
      15704:X5=15708:GOSUB2280:X4=15768:X5=15772:GOSUB22
      80:X4=15835:X5=15836:GOSUB2280:X7=16000+RND(18):GO
      SUB2270:PRINT@768,;
2215 XS=INKEY$:IF XS<>"", Y2=ASC(X$):IF Y2=44,Y2=-1 ELS
      E IF Y2=46,Y2=1 ELSE Y2=0
2220 GOSUB2260:X7=X7+Y2:IF X7>16018,DS=DS+.045:PRINT:PR
      INT"YOU DID IT ! - YOU SLAYED THE DRAGON !!!!!":G
      OSUB100:RETURN:ELSE IF X7>=16000 GOSUB2270 ELSE 22
      95
2240 IF RND(4)<>1,2215 ELSE F2=18:FOR F1=46 TO 30 STEP-
      1:F2=F2+1:IF POINT(F1,F2) IF E=1,R7=RND(2) ELSE R7
      =RND(3) ELSE 2250
2245 IF R7=2 PRINT"SISSLE - YOU'VE BEEN SCORCHED !":DS
      =DS-.002:ELSE PRINT"YE":T6=X7:FOR X7=T6TO16000 ST
      EP-1:GOSUB2270:PRINT"O":GOSUB2260:NEXT:PRINT"W !"
      :R4=1:GOTO3000
2250 SET(F1,F2):NEXT:GOSUB90:F2=18:FOR F1=46 TO 30 STEP
      -1:F2=F2+1:RESET(F1,F2):NEXT:GOTO2215
2260 FOR X3=0TO3:POKE X7+X3,128:NEXT:POKE X7+65,128:POK
      E X7+66,128:RETURN
2270 POKE X7,136:POKE X7+1,174:POKE X7+2,140:POKE X7+3,4
      5:POKE X7+65,151:POKE X7+66,149:RETURN
2280 FOR X3=X4 TO X5:W3=W3+1:POKE X3,PEEK(X6-W3):NEXT:R
      ETURN
2290 FOR Z1=0 TO B(X2):W3=W3+1:POKE A(X2)+Z1,PEEK(32768
      -W3):NEXT Z1:RETURN
2295 PRINT"COWARD !":RETURN
2300 C3=30:PRINT:PRINT"IT'S A GOBLIN ":FOR EX=1TO45:PR
      INT"1":GOSUB80:NEXT:GOSUB80:PRINT:FOR EX=1TO32:C3
      =ABS(C3+(SGN(RND(3)-2)*5)):IF C3>56,C3=56
2350 PRINTTAB(C3);"R U N !":NEXT:PRINTTAB(C3);"WHEW, S
      AFE !":C=RND(2):L=L+RND(PN)*C:DS=DS-.01*(RND(PN+1)
      -1):RETURN
2400 PRINT"GEE !":GOSUB95:PRINT"IT'S A KID SELLING HOT
      DOGS !":IF J AND G>0,HD=RND(G+G/2) ELSE HD=G+1
2420 GOSUB100:PRINT"THE KID SAYS HE'LL SELL YOU ONE OF
      HIS GASTRONOMIC DELIGHTS FOR":HD;"GOLD COINS":GOSU
      B100:IF HD>G PRINT"SORRY, YOU'RE TOO POOR":RETURN:
      ELSE G=G-HD
2430 M=M-RND(14):PRINT"GREAT !":RETURN
3000 GOSUB100:CLS:PRINT"DATELINE : THE OLD FOREST":PRIN
      T:ON R4 GOTO 3100,3200,3300,3400,3500,3600,3700,38
      00,3900,4000,4200
3100 PRINT" WOW! CAN":RS;"RUN. WHAT AN EXHIBITION OF BL
      INDING SPEED. UNFORTUNATELY IT OCCURRED AS A RESUL

```

CP/M^{®1} - based Business Software for TRS-80^{®2} computers on the fastest Mod-II CP/M with the most features!!!

- Over 610,000 bytes/disk
- Downloading package included
- 1,200 baud operation of serial printers without data loss
- Single drive backup

MOD-II CP/M \$250.00

- Mixed single/double density on any of 4 drives (even a 1-drive system)
- Ultra-fast disk operation
- Emulation of cursor addressing for any of several "dumb" CRTs

MOD-I CP/M \$150.00

- Auto-LF printer support & ASCII top-of-form software (LPIII)
- Supplemental document describing our implementation
- User-settable function keys

CBASIC2^{®3} (Mod I or II) \$110.00

The following software for Mod-II CP/M only unless otherwise stated (*-requires CBASIC2):

RM/COBOL^{®4} - Only COBOL for CP/M with alternate keys (multi-key ISAM), CRT screen handling, interactive debug, Z80 code, and the most useful Level 2 features. **Compatible with Tandy's COBOL-but runs faster!** \$495.00

PMS (Property Management System) - Interactive, menu-driven system includes full G/L, budgeting, cash journal, delinquency list, tenant activity/rent roll, complete audit trail and reports on vacancies, lost rent, and vendors \$650.00*
demo disk & manual 75.00*

APH (Automated Patient History) - General-purpose question-asking, answer-printing system furnished as self-administered review-of-systems general patient history (Mod-I also) ... \$175.00*

Osborne & Assoc. CBASIC source programs (Mod-I also):

Payroll w/Cost Accounting \$250.00*
Accts. Payable/Accts. Receivable \$250.00*

Verbatim^{®6} media: (Qty. 100 prices)

5 1/4" single density \$2.50 ea.
8" certified double density \$4.00 ea.

MAGIC WAND^{®5} - Full-feature word processing, true proportional spacing, file merging, and use of full-screen editor for source programs or data \$400.00

RPA (Residential Property Analysis) - Analyzes income and expense, financing, taxes, inflation and depreciation on home, condo, or apartments over a user-selectable time. Shows payoff in terms of ROI, Cap rate, cash-on-cash. Amortization schedules and worksheet \$300.00*
demo disk & manual 35.00*

RBC (Rent/Buy Comparison) - Sales or investment tool to compare renting and savings account investment vs. purchasing a particular property \$250.00*
demo disk & manual 35.00*

General Ledger w/Cash Journal \$250.00*
O&A CBASIC Books (ea.) \$ 20.00

8" single density \$ 3.00 ea.
450" tape cartridges \$20.00 ea.



8041 Newman Ave., Suite 208
Huntington Beach, CA 92647
(714) 848-1922

Registered trademark of:

- *1 Digital Research
- *2 Tandy Corp.
- *3 Compiler Systems, Inc.
- *4 Ryan-McFarland Corp.
- *5 Small Business Applications, Inc.
- *6 Verbatim Corp.



Distributed in U.K. by:
Microcomputer Applications Ltd.
11, Riverside Court,
Caversham, Reading, England
TEL: (0734) 470425

At Last! Orchestra-80

A TRS-80™ MUSIC SYNTHESIS SYSTEM

WRITTEN BY JON ROCKELMAN

Turns Any 16K Level II TRS-80 Into A High Quality Musical Instrument

The Software

A five part machine language program consisting of:

1 Digital synthesizer—produces up to four simultaneous voices in a six-octave range. For example, you could have a trumpet, oboe, clarinet, and organ playing in four-part harmony or alter any of the voices to imitate other instruments.

2 Music language compiler—a simple and easy to use language allows you to enter your favorite written music in any key or time signature. Plays all note values from whole notes to sixty-fourth notes which may be single, double, or triple-dotted and/or played as triplets. Supports single and double accidentals, staccato, pizzicato, two forms of articulation, repeats, second endings (with or without retard), and modulation.

3 Full screen editor—a full function text editor with blinking cursor is provided for easy entering and modifying of music programs. Functions include insert/delete characters, insert/delete line and global character string search, and automatic error detection/display.

4 File manager—provides the orderly storing and retrieval of named program files on tape or disk. You can even sequence several songs for automatic loading and playing.

5 Initialization—this set-up routine allows you to alter the voices, select the standard four-voice synthesizer or a special high resolution, three-voice version and choose the standard (1.77 MHz) or the enhanced (2.66 MHz) clock rate.

The Hardware

A single 1½" by 2" PC board plugs into the expansion connector on the TRS-80 keyboard or the screen printer connector on the expansion interface. This board contains the electronics required to convert the computer output into a high fidelity audio signal. Just plug in the board and connect to the aux/tape/tuner input of any audio amplifier. No external power supply is required.

Includes:

- Tape and disk versions on cassette
- Completely assembled and tested PC board
- Detailed and complete instruction manual
- Sample music programs

Orchestra-80

\$79.95

PLUS \$2.00 POSTAGE AND HANDLING
CALIFORNIA RESIDENTS ADD 6% SALES TAX

SEND CHECK OR MONEY ORDER TO:

Software Affair

473 SAFENA COURT SUITE 1, SANTA CLARA, CALIFORNIA 95051

SPECIAL DEMO LINE! HEAR ORCHESTRA-80 ON (408) 727-8194

T OF A BLISTERING DISCOVERY CONCERNING DRAGONS AND
D IN THE OPPOSITE DIRECTION OF THAT OF THE PRINCES
GOTO4500

3200 PRINT " WHILE SEARCHING FOR THE LOST PRINCESS";RS;
"BECAME THE MAIN COURSE OF A RAMBLING ARACHNID";GOT
O4500

3300 PRINT " ";RS;"WAS ABLE TO HAVE A VERY CLOSE LOOK AT
ONE OF THOSE MUCH TALKED ABOUT TROLL SWORDS TODAY
- UNFORTUNATELY IT WAS WHILE HE WAS BEING STABBE
D WITH IT";GOTO4500

3400 PRINT"BLUNDER MAN STRIKES AGAIN":PRINTRS;"STUPEFIE
S EVERYONE - MAKES TROLL'S SWORD DISAPPEAR IN
BODY - UNFORTUNATELY HIS OWN";GOTO4500

3500 PRINT" AFTER REACHING FULL AGREEMENT WITH";RS;"THE
SATYRS NOT ONLY THREW A GREAT FEAST IN HIS HONOR B
UT MADE HIM THE MAIN DISH AS WELL";GOTO4500

3600 PRINT " WHILE";RS;"WAS CONDUCTING VERY DELICATE NE
GOTIA -TIONS WITH THE SATYRS - THEIR DIPLOMATIC CO
RP ATE HIM FOR LUNCH";GOTO4500

3700 PRINT " ";RS;"FOUND THAT WHILE ON HIS LOFTY EXCURS
ION HE COULD DO WITHOUT MANY THINGS. UNFORTUNATELY
FOOD WAS NOT ONE OF THEM - HE STARVED TO DEATH";G
OTO4500

3800 PRINT" YOU GUESSED IT !";RS;"HAS DONE IT AGAIN.":
PRINT"HOPE HE LIKES DOING WINDOWS";GOTO4500

3900 PRINTRS;"MAKES IT TO DUNGEON AND BACK THOUGH MANY
PERILS - HAS ONLY ONE PROBLEM - LOOSES PRINCES
S";GOTO4500

4000 PRINTRS;"HAS PULLED IT OFF - THE PRINCESS HAS BEEN
RESQUED";IF G>END(30) PRINT;" - IS IMMEDIATE
LY ACCEPTED INTO THE KING'S COURT AND IS ALLOWED T
O DO ALL THOSE NICE LITTLE THINGS THAT ONE DOES H
LYEVER AFTER";GOTO4500

4100 PRINT" - UNFORTUNATELY HE IS TOO POOR TO BE ACCE
PTED IN TO ROYALTY - MUST KEEP UP THE IMAGE YOU
KNOW";GOTO4500

4200 PRINTRS;"RAN INTO SLIGHT DIFFICULTY - THE NECROMAN
CER.":PRINT"INFORMED SOURCES SAY THAT OUR HERO NO
W EATS HEY AND IS HEARD TO BREV OCCASIONALLY"

4500 PRINT:INPUT"ENTER FOR ANOTHER ADVENTURE";A:RUN

5000 DATA 156,172,32,156,172,159,175,32,159,175,140,188
32,140,188,188,140,32,188,140,176,188,32,176,188,
138,156,172,32,168,140,158,138,140,188,32,140,188,
133

DONE

for the TRS-80 from Micro-Mega

The Original GREEN-SCREEN



The eye-pleasing Green-Screen fits over the front of your TRS-80 Video Display and gives you improved contrast with reduced glare. You get bright luminous green characters and graphics like those featured by more expensive CRT units.

Don't confuse the Original Green-Screen with a piece of thin film stuck to the face of your video tube, such as that advertised by others. The Original Green-Screen is mounted in a full frame perfectly matched to the color and texture of the TRS-80 Video Display. It is attached with adhesive strips which do not mar your unit in any way.

The full frame design of the Original Green-Screen "squares off" the face of your video display and greatly improves the overall appearance of your system.

THE GREEN-SCREEN.....\$13.95
Add \$1.00 for postage and handling.

Terms: Check or money order, no CODs or credit cards, please. Add amount shown for postage and handling to price of the item. All items shipped within 48 hours by first class or priority mail. Virginia residents, add 4% sales tax.
✓ 309

Micro-Mega • P.O. Box 6265 • Arlington, Va 22206

Leaders
Games
Pins
Handicaps
Blind Scores
Teams
Players

BOWLING LEAGUE STATISTICS

High Game
High Series
Lanes
Substitutes
Pins
Scratch
Averages

TRS-80*
32K — DOS — PRINTER

BOWLSTAT 1.1 will generate team standing sheets suitable for posting with full team and player statistics, and also print league scoring sheets. Printing format is optimized for the 779 printer, but a modification for any printer with 80 characters minimum per line is provided. A wide range of handicapping and scoring options meets almost any league's requirements. Entry of weekly scores is fast and simple with extensive prompting and error detection.

Supplied on Diskette with manual
\$49.95

Manual Only
(deductable on purchase
of diskette)
\$5.95

Pa. residents add 6% tax

Datascore
P. O. Box 995 Sharon, Pa. 16146

*Trademark of Tandy Corp.

✓ 352

T U B E

The Ultimate Buffered Editor
for TRS-80 Disk Systems

TECO like, 21 edit commands, direct cursor control, block move, multiple input files, file size limited only by available disk space.

On TRS-80 Disk with Manual \$40.00
Also available for TRS-80

• SBASIC Structured Basic Pre-Processor \$50.00

• BASOPT Basic program optimization program \$20.00

DEFINITE COMPUTER
SYSTEMS

313 Meadow Lane
Hastings, Michigan 49058
(616) 945-5334

(Dealer inquiries invited)

✓ 84

VISA & MASTERCARD ACCEPTED

*TRS-80 is a trademark of Tandy Corp.

FINALLY!

PROFESSIONAL
PROGRAMMING
TOOLS FOR EVERY
BASIC PROGRAMMER


Do you write Basic programs with your TRS-80? Then you know there are times when you need to:

- RENUMBER part or all of your program.
- DELETE many lines with one command.
- APPEND common routines from tape.

Now, with PROgrammer, you can do all these things! And COMPRESS your programs to speed execution and reduce size. And MOVE blocks of lines within your program quickly and efficiently. Moreover, load PROgrammer just once, and these commands are always available!

PROgrammer: \$25 on cassette with complete instructions. Level II required. Please indicate memory size with order. Calif. residents add 6% sales tax. *TRS-80 is a trademark of Tandy Corp.

RATIONAL SOFTWARE™
963 E. California Pasadena, CA 91106
✓ 241

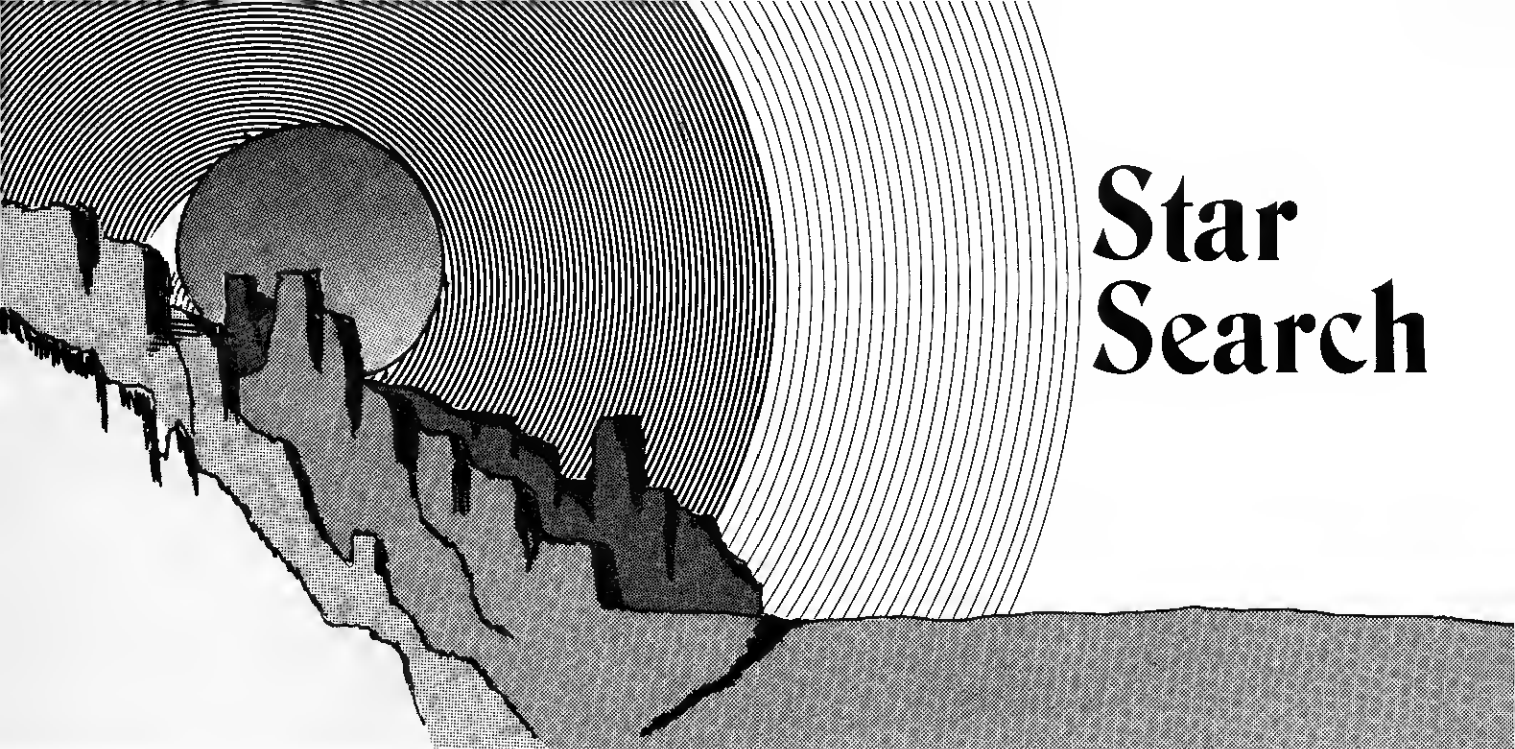

Star Search

Star Search
Level II 16K
Software Exchange
W. Bloomfield, MI
\$12.95

Howard Berenbon
 2681 Peterboro
 W. Bloomfield, MI 48033

Robert F. Gentile
 20156 N. Larkmoor
 Southfield, MI 48076

Star Search is a program for a 16K TRS-80 Level II. It creates a real-time, Star Trek-type game.

As the Captain of the Enterprise, your mission is to protect the Galaxy from the Klingon threat. Your level of experience determines the number of Klingons that you must destroy and the amount of time, in star dates, that you have to complete your mission. A quadrant is displayed as in Example 1. The symbols are as follows:

- B Base
- E Enterprise
- K Klingon
- * Star
- Sector

A legend for all operations appears at the top of the display. Just enter the flashing letter for the desired function. There is no need to depress ENTER. Here are your options:

- 1) R Report
- 2) S Short Range Sensor
- 3) L Long Range Sensor
- 4) C Computer
- 5) P Phaser
- 6) G Galaxy Map
- 7) T Torpedoes (Photon)
- 8) E Engines
- 9) Z Self Destruct

Options

Typing an R displays the status of the Enterprise, including the power left and the number of Klingons left. See Example 2.

Typing an S activates the Short Range Sensor and displays the quadrant where you are currently located. The Y-coordinate is the vertical and the X-coordinate is the horizontal. It's also shown in Example 1.

The Long Range Sensor is activated by typing an L. It displays a number code for the eight quadrants that surround the Enterprise, plus its present location at the center. This is the format:

1) The hundreds digit indicates the number of Klingons (K) in the quadrant.

2) The tens digit indicates the number of Bases (B).

3) The ones digit indicates the number of Stars (*). A zero indicates that there are no objects in the quadrant (Example 3).

The computer can be used to calculate the angle for firing torpedoes and moving the Enterprise. Type a C to activate the computer. Enter the Y-coordinate and the X-coordinate of the object. After entering the numbers, depress ENTER. The sector distance and angle will be displayed as in Example 4.

The Phasers are activated by typing a P. Enter the unit amount of energy you wish to fire. The hit will be displayed graphically. If there is more than one Klingon in the quadrant, then the energy will be distributed evenly among them (Example 5).

Typing a G displays the Galaxy Map. It displays 64 quadrants with a similar notation, as in the Long Range Sensor. The only difference is, the code includes a minus sign (-) to indicate that the quadrant has already been charted. Here are some examples:

1) - 0 indicates already charted but empty

2) 0 indicates uncharted

3) - 102 indicates 1 Klingon, no Bases, and 2 Stars

4) - 12 indicates 1 Base and 2 Stars

5) - 1 indicates 1 Star

Example 6 displays a Galaxy Map.

Type a T to activate the torpedoes, and enter the direction in



Fig. 1. Some graphic codes and their pattern.

New Products ... for the TRS-80 Model II:

BASIC EXTENSIONS FOR MODEL II:

Remember all the nice things the folks at APPARAT did for Model I BASIC? Get them *all* now for the Model II. Abbreviations, single key commands, XREF! This one is a must! \$50

HOST:

A set of extensions to TRSDOS which allow another Model II, a Model I, or any ASCII terminal to remotely control the 'host' Model II. INCREDIBLY EASY TO USE! \$50

FRIEND:

An extremely powerful set of TRSDOS utilities which allow 'group' or 'generic' processing of disk files. Copy, kill, print, display. SAVES A BUNDLE OF TIME! \$75

SKRUNCH:

Compress your BASIC programs by 30 to 40%. Makes them run quicker too. A SUPER FAST TRSDOS UTILITY. \$35

BREAK7E:

A set of patches to TRSDOS and BASIC to move the break key out of the operator's way so it won't be hit accidentally, but leaves the function active so it is there when you really need it. FREE with any Model II software purchase.

AND NOW UNDER DEVELOPMENT:

PL/B:

A really high level, fully structured language for the Model II, which compiles to machine code. Logical language constructs patterned after ANS PL/I.

Model I and Model II TRS-80® owners...

Are your programs taking too long to run?

Here's how to **speed them up considerably** with **no** hardware modifications or changes to the programs themselves.

Sound incredible?
It's not.

The TRS-80® SPOOLER^{T.M.}

is a proven TRSDOS® and NEWDOS® extension which gives you the same performance edge bigger computers have enjoyed for years.

With the TRS-80® SPOOLER, CPU time ordinarily spent waiting for Disk and Printer operations to complete is made available for useful work.

Programs like Radio Shack's General Ledger or Mailing List run almost **twice as fast** with our product installed!!

Installation is simple and fast. No changes to your programs are required. 32K disk system with printer is the minimum system required to effectively use this product. Price: \$100

TRS-80 is a trademark of Radio Shack, a division of Tandy Corp.
NEWDOS is a product of Apparat, Inc., of Denver, Colorado.

Call 513-891-4496 TODAY for complete details, or
write:

Snapp, Inc. ✓ 232

8160 Corporate Park Drive
Cincinnati, Ohio 45242



degrees from 0 to 360. Press ENTER to fire. If you've used the computer to calculate the angle of the target, then activate the torpedoes and type a C to fire. The torpedo will be displayed moving across the quadrant to the target.

You can destroy Stars, Klingons and even Star Bases. You have 10 torpedoes, illustrated in Example 7.

The Engines are activated by typing an E. You can move the Enterprise within a quadrant or to another quadrant. A sector distance and angle entry is required. The movement is displayed, with the ship starting slowly and then gathering speed.

To move to another quadrant, enter a sector distance which moves the Enterprise beyond the boundaries of the quadrant. Moving at angles other than 0, 90, 180, 270 or 360 requires a greater sector distance to reach your destination.

Finally, you can't move through Stars, Star Bases, or Klingons; you must maneuver around them. Example 8 illustrates this movement.

One final command used under extreme conditions is the Z

command. Typing a Z destroys the Enterprise and ends the game.

Special Subroutines

Here's a description of some of the special subroutines used in Star Search including the Enterprise graphics, the moving stars, active keyboard input, target impact, and timing. (Note: Up arrow appears as a left bracket in the listing.)

The Enterprise is drawn with program lines 2790 through 2910. It's drawn quickly, in large blocks, using the statement STRING\$(X,Y), where X is the number of graphic blocks to be activated and Y is the pattern turned on.

The TRS-80 graphic block is divided into six smaller sub-blocks. Sixty-four different patterns can be created using code numbers 128 through 191 for Y. The instruction CHR\$(Y) activates a single pattern as seen in lines 2890 and 2900. In line 2790 the statement PRINT@138,STRING\$(23,191); activates 23 full display blocks, beginning at screen position 138.

Line 2800, PRINT@235,STRING\$(13,176);, activates 13 partial blocks beginning at screen position 235. And so on. See Fig. 1 for some of the block patterns and their codes.

Program lines 2950 through 3080 create the moving stars, as seen when the Enterprise moves from one quadrant to another. This simulates movement through space.

Program lines 3950 through 3040 establish the moving star matrix B(11,11,2). It contains 121 sets of X and Y coordinates, for the 12 separate star paths. The data in line 3010 provide progressively increasing steps to simulate the visual effect of movement.

The active keyboard input routine uses the INKEY\$ statement of Level II BASIC at program lines 670 through 760, 2760 and 2770.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 73.915
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 3977
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
SHORT RANGE SENSOR 1 . . . . .
2 . . . . .
3 . . . . .
4 . . . . .
5 . . . . .
6 . . . . .
7 . . . . .
8 . . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 5 5 SECTOR 2 7
```

Example 1. Quadrant 5 5 and Short Range Sensor are displayed.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 73.681
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 3975
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
STATUS REPORT 1 . . . . .
STARDATE 3733.28 2 . . . . .
TIME LEFT 73.7153 3 . . . . .
CONDITION GREEN 4 . . . . .
POSITION 5 . . . . .
QUADRANT 5 5 6 . . . . .
SECTOR 2 7 7 . . . . .
ENERGY 3975 8 . . . . .
TORPEDES 10 1 2 3 4 5 6 7 8
KLINGONS LEFT 25 ENTERPRISE IN QUADRANT 5 5 SECTOR 2 7
STARBASES 7
```

Example 2. Status Report.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 72.130
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 3957
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
LONG RANGE SENSOR 1 . . . . .
104 103 108 2 . . . . .
107 6 1 3 . . . . .
12 106 102 4 . . . . .
5 . . . . .
6 . . . . .
7 . . . . .
8 . . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 5 5 SECTOR 2 7
```

Example 3. Long Range Sensor.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 68.079
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 3582
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
COMPUTER READY 1 . . . . .
2 . . . . .
3 . . . . .
4 . . . . .
5 . . . . .
6 . . . . .
7 . . . . .
8 . . . . .
1 2 3 4 5 6 7 8
ENTER DESIRED 1 2 3 4 5 6 7 8
TARGET LOCATION ENTERPRISE IN QUADRANT 3 5 SECTOR 6 7
SECTOR Y AXIS 4 ANGLE = 26
SECTOR X AXIS 8 RANGE = 2
```

Example 4. Computer Display.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 65.948
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 3561
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
PHASER ENERGIZED. 1 . . . . .
2 . . . . .
3 . . . . .
4 . . . . .
5 . . . . .
6 . . . . .
7 . . . . .
8 . . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 3 5 SECTOR 6 7
UNITS TO FIRE 600
```

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 65.541
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 2959
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
PHASER ENERGIZED. 1 . . . . .
2 . . . . .
3 . . . . .
4 . . . . .
5 . . . . .
6 . . . . .
7 . . . . .
8 . . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 3 5 SECTOR 6 7
UNITS TO FIRE 600
SPOCK: 'THERE ARE 24 KLINGONS REMAINING'
```

Example 5. Display of Phaser Operation.

```
(R)EPORT      (S)R. SENSOR      (L)R. SENSOR      DAYS LEFT 64.913
(P)HASER      (G)ALAXY MAP      (T)ORPEDES 10      POWER LEFT 2952
(C)OMPUTER    (E)NGINES          COMMAND PLEASE    *** CAPTAIN ***
GALAXY MAP 11 0 0 0 0 0 0 0 0
12 0 0 0 0 0 0 0 0
13 0 0 0 -101 -6 -108 0 0
14 0 0 0 -104 -103 -108 0 0
15 0 0 0 -107 -6 -1 0 0
16 0 0 0 -12 -106 -102 0 0
17 0 0 0 0 0 0 0 0
18 0 0 0 0 0 0 0 0
1: 2: 3: 4: 5: 6: 7: 8:
ENTERPRISE IN QUADRANT 3 5 SECTOR 6 7
```

Example 6. Galaxy Map.

Word Processing HMCT Style



Using the best in word processing software the Magic Wind[®], the best in letter quality printers the NEC Spinwriter[™], and the well-known TRS-80[™] Model II. You've looked and looked for the best and now it is available from the Complete Computer Company, HMCT. Word processing at its best from \$750.

Magic Wind available separately for the Model II on other computers \$299.

HMCT The Complete Computer Company

5313 Eastman - Bellvue, Texas 77411 (713) 981-2115

This allows the command entry at any time, since the keyboard is constantly being checked for input. It also serves as a keyboard debounce routine.

Program lines 3500 through 3600 are used for target impact during combat. Eighteen is the location of the target and A\$ is the target type. When a Klingon, a Star, a Star Base, or the Enterprise is hit, program line 3530 displays the impact symbol (a cross) over the object. Line 3590 clears the symbol from the display.

The subroutine located at program line 3610 decrements the DAYS LEFT variable D by .002. This happens each time the program runs through the input routine at line 2760. This works out to be about one minute per STARDATE. ■

```
(R)EPORT      (S)R. SENSOR  (L)R. SENSOR  DAYS LEFT 45.442
(F)HASER      (G)ALAXY MAP  (T)ORPDEES  POWER LEFT 3504
(C)OMPUTER    (E)NGINES      COMMAND PLEASE *** CAPTAIN ***
PHOTON TORPEDO TUBES
LOADED
1. . . . .
2. . . . .
3. . . . .
4. . . . .
5. . . . .
6. . . . .
7. . . . .
8. . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 6 5 SECTOR 5 4

TORPEDO FIRED
COURSE (0-360) 116
```

```
(R)EPORT      (S)R. SENSOR  (L)R. SENSOR  DAYS LEFT 44.298
(F)HASER      (G)ALAXY MAP  (T)ORPDEES  POWER LEFT 3491
(C)OMPUTER    (E)NGINES      COMMAND PLEASE *** CAPTAIN ***
PHOTON TORPEDO TUBES
LOADED
1. . . . .
2. . . . .
3. . . . .
4. . . . .
5. . . . .
6. . . . .
7. . . . .
8. . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 6 5 SECTOR 5 4

TORPEDO FIRED
SPOCK: 'THERE ARE 20 KLINGONS REMAINING'
```

Example 7. Photon Torpedo Operation.

```
(R)EPORT      (S)R. SENSOR  (L)R. SENSOR  DAYS LEFT 16.676
(F)HASER      (G)ALAXY MAP  (T)ORPDEES  POWER LEFT 2967
(C)OMPUTER    (E)NGINES      COMMAND PLEASE *** CAPTAIN ***
ENGINES
1. . . . .
2. . . . .
3. . . . .
4. . . . .
5. . . . .
6. . . . .
7. . . . .
8. . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 4 4 SECTOR 5 5

SECTOR DISTANCE 7
COURSE (0-360) 0
```

```
15.516
2616

KLINGON ATTACK
330 UNITS HIT FROM KLINGON AT SECTOR 5 5
```

```
(R)EPORT      (S)R. SENSOR  (L)R. SENSOR  DAYS LEFT 15.124
(F)HASER      (G)ALAXY MAP  (T)ORPDEES  POWER LEFT 2612
(C)OMPUTER    (E)NGINES      COMMAND PLEASE *** CAPTAIN ***
SHORT RANGE SENSOR
1. . . . .
2. . . . .
3. . . . .
4. . . . .
5. . . . .
6. . . . .
7. . . . .
8. . . . .
1 2 3 4 5 6 7 8
ENTERPRISE IN QUADRANT 3 4 SECTOR 6 5
```

Example 8. Engine Operation.

Star Search Program Listing.

```
100 ONERRORGOTO3730:POKE16553,255:RANDOM:DEFINTA-C,F-Z:
GOTO130
110 E1=40-29-40*(D=99):Z=0
120 FORR=0TOE1:IFR/4=INT(R/4)ANDD=90THENGOSUB3610:NEXTR
:RETURNELSENEXT:RETURN
130 CLS:PRINT@86,"COPYRIGHT (C) 1980":PRINT@158,"BY"
:D=99
140 PRINT@204,"R. GENTILE & H. BERENSON"
150 G(1)=1:G(2)=14:G(3)=30:G(4)=65:G(5)=78:G(6)=94:G(7)
=129:G(8)=142:BS(1)="R"
160 BS(2)="S":BS(3)="L":BS(4)="P":BS(5)="G":BS(6)="T":B
S(7)="C":BS(8)="E"
170 PRINT@9,"***** S T A R S E A R C H *****"
:***:;E1=99:GOSUB120
180 DIMA(152),B(11,11,2),C(11),Z(11):Q=6:GOSUB2790
190 PRINT@896,"WELCOME ABOARD. PLEASE ENTER THE NUMBER
OF YEARS YOU HAVE BEEN"
200 PRINT" A STAR SHIP CAPTAIN (0 TO 9)";
210 AS=INKEY$:IPAS=""THENGOSUB3310:GOTO210
220 Z9=VAL(AS):Y=6000/(Z9+2):GOTO3100
230 CLS:PRINT@12,"ACTION ALERT !! STANDBY FOR WARP DRIV
E !!":GOSUB110
240 A=64:GOSUB3050:Z7=3000+1000*RDND(0):D=60+RDND(30-Z9)
250 PRINT@12," IN SUB-SPACE ON COURSE TO STATION
";
260 A=0:K=0:B=0:FORI=0TO63:J=- (RDND(30)\4):IFI/10=INT(I/
10)GOSUB3060
270 C=6/(RDND(Y))\{1/3}
280 IFC>Z9+3THEN270ELSEK=K+C:B=B+J
290 A(I)=-100*C-10*J-RDND(8):NEXTI:IF(B<2)OR(K<4)THEN260
300 PRINT@0,"STARDATE";Z7;" WE ARE ON STATION - SCANNI
NG AREA"
310 GOSUB3080
320 PRINT@64,"YOU HAVE";D;"DAYS";
330 PRINT" TO DESTROY ";K;"KLINGONS"
340 PRINT"THERE ARE ";B;"STARBASES.":GOSUB970 :C=0:O=0:
H=K:H1=K:SD=D
350 U=RDND(8):V=RDND(8):X=RDND(8):Y=RDND(8)
360 FORI=71TO152:A(I)=0:NEXTI:A(8*X+Y+62)=4:M=ABS(A(8*U
+V)):GOSUB3610
370 N=M/100
380 I=1:IFNFORJ=1TON:GOSUB980 :A(J+134)=300:A(J+140)=S:
A(J+146)=T:NEXTJ
390 M=M-100*N:I=2:IF(INT(M/10))GOSUB980
400 M=M-INT(M/10)*10:I=3
410 IFMFORJ=1TOM:GOSUB980 :NEXTJ
420 GOSUB920 :GOSUB1470:A=2:IFK=<0THEN490
430 IFD>0THEN460
440 A=-4.4:D=.3:GOSUB3700:PRINT@832,"IT'S TOO LATE, THE
GALAXY HAS BEEN ";
450 PRINT"OVERRUN":GOSUB110:GOTO490
460 IFE>0THEN1140
470 C=400:E=0:A=0:CLS:PRINT"ENTERPRISE DESTROYED"
480 E1=50:GOSUB120:GOSUB2930
490 CLS:PRINT@128,"";PRINT"FINAL REPORT":PRINT:PRINTD;
"DAYS LEFT"
500 PRINTH-K;"KLINGONS DESTROYED"
510 PRINTC;"CASUALTIES":CR=1000*(H-K)\2/(H*(SD-D))-C
520 PRINTE;"UNITS OF ENERGY LEFT"
530 PRINTF;"TORPEDOES LEFT":B=1/3:PRINT:PRINT"COMMAND R
ATING: ";CR
540 J=(1/H)*Z9*(H-K)+(D(B-C[B+{1/8}*E[B+A]/2:IFJ>10
THENJ=10
550 IFJ<0THENJ=0
560 IFJ<Z9THENA$="PROMOTION TO FLEET ADMIRAL":A=1:GOTO6
10
570 IFJ=Z9THENA$="CONTINUED ACTIVE DUTY":A=0:GOTO610
580 IFJ<1THENJ=1
590 AS="COMMAND OF A GARBAGE BARGE":A=-1:IFJ<Z9THENA$=-Z
9+J-1
610 PRINT:PRINT"YOU ARE ";:IFC=400PRINT"POSTHUMOUSLY ";
620 PRINT"RECOMMENDED FOR ";AS
630 PRINT:PRINT"NEW GAME ?":GOSUB110
640 AS=INKEY$:IPAS=""THEN640ELSEIF(AS="Y")THENRUNELSECL
S
650 PRINT@990,"GOOD BYE.";
660 END
670 Z8=0:AS=INKEY$:IPAS=""THEN820
680 IPAS="S"THEN1140ELSEIFIPAS="Z"THEN490
690 IPAS="G"THEN1030
700 IPAS="L"THEN1090
710 IPAS="P"THEN1280
720 IPAS="R"THEN1750
730 IPAS="E"THEN1870
740 IPAS="T"THEN2200
750 IPAS="C"THEN2600ELSE820
760 PRINT@0,"(R)EPORT (S)R. SENSOR (L)R. SENSOR
";
770 PRINT"DAYS LEFT ";:GOSUB3610
780 PRINT@64,"(P)HASER (G)ALAXY MAP (T)ORPDEES"
;
790 PRINT" POWER LEFT ";:GOSUB3620:GOSUB3630
800 PRINT@128,"(C)OMPUTER (E)NGINES COMMAND
PLEASE";
810 PRINT" *** CAPTAIN ***";I5=-20
820 IFE=<0ORD=<0THEN430
830 IFK=<0THEN490ELSEGOSUB3610
840 IFI5>20THENI5=-15:E=E-1:I9=I9+1:GOTO880
850 IFI5>0THEN670
```

```

860 IFI9=10THENGOSUB2080
870 FORA=1TO8:PRINT@G(A)," ";NEXTA:PRINT@181," "
;:GOTO820
880 FORA=1TO8:PRINT@G(A),B$(A);:NEXTA:PRINT@181,"CAPTAIN"
;:
890 GOSUB3610
900 GOSUB3630910 GOSUB3620:IF=-20:GOTO820
920 FORI=X+(X<1)TOX-(X<8):FORJ=Y+(Y<1)TOY-(Y<8)
930 IFA(8*I+J+62)<2THENNEXTJ,I:O=0:RETURNELSEGOSUB1250
940 IFO=0THENGOSUB2790:GOSUB3380
950 PRINT@833,"SULU:'CAPTAIN,'";:PRINT@897,"WE ARE DOCKED"
ED ";
960 PRINT@961,"AT STARBASE ";:GOSUB110:GOSUB1250
970 E=4000:F=10:O=1:FORI=64TO70:A(I)=0:NEXTI:GOSUB3610:
RETURN
980 S=RND(8):T=RND(8):A=8*S+T+62:IFA(A)GOTO980
990 A(A)=1:GOSUB3610:RETURN
1000 GOSUB920:GOSUB1470:IF28THEN140ELSE880
1010 PRINTTAB(22)"ENTERPRISE IN QUADRANT";U;V;"SECTOR";
X;Y;
1020 PRINTCHR$(30);:RETURN
1030 J=2:GOSUB1620:Q=213:IFITHEN880
1040 FORI=0TO7:Q=Q+64:PRINTTAB(21)" ";PRINT":":PRINTUS
ING" ";I+1;
1050 FORJ=0TO7:M=A(8*I+J)
1060 PRINTTAB(21)" ";:PRINTUSING"#####";(M>0)*M;NEXTJ:G
OSUB3610:PRINT@Q," ";
1070 NEXTI:PRINTTAB(21)" ";:FORI=1TO8:PRINTUSING"###
";I;
1080 PRINT":":NEXTI:GOSUB1010:GOTO880
1090 Q=256:J=3:GOSUB1620:IFITHEN880
1100 FORI=U-1TOU+1:PRINT@Q," ";FORJ=V-1TOV+1:M=8*I+J-9:
A=0
1110 IF(I>0)AND(I<9)AND(J>0)AND(J<9)A=ABS(A(M)):A(M)=A
1120 PRINTUSING"#####";A;NEXTJ:Q=Q+64:GOSUB3610:NEXTI
1130 GOTO880
1140 J=1:GOSUB1620:IFI2THENCLS:GOTO760
1150 M=8*U+V-9:A(M)=ABS(A(M)):Q=213
1160 FORI=1TO8:Q=Q+64:PRINTTAB(21)I;" ";:FORJ=1TO8
1170 M=A(8*I+J+62):IFM=0PRINT" .";
1180 IFM=1PRINT" K";
1190 IFM=2PRINT" B";
1200 IFM=3PRINT" *";
1210 IFM=4PRINT" E";
1220 PRINT" ";
1230 NEXTJ:GOSUB3610:PRINT@Q," ";NEXTI:PRINTTAB(21)"
";:FORI=1TO8:PRINT" ";I;
1240 NEXTI:GOSUB1010:GOTO760
1250 I=192:GOSUB3610
1260 PRINT@I,STRING$(21,32);:I=I+64:IFI<769THEN1260ELSE
I=832:GOSUB3610
1270 PRINT@I,STRING$(1,30);:I=I+64:IFI<961THEN1270ELSEG
OSUB3610:RETURN
1280 J=4:GOSUB1620:IFITHEN880
1290 PRINT@200," ENERGIZED.";:PRINT@832," UNITS TO FIRE
";
1300 Q=846:GOSUB2760:A=I:IFA<1THEN880
1310 IFAEPRINT@320," SPOCK: 'WE HAVE ONLY ";:PRINT@388
,E;"UNITS.'";:GOTO880
1320 E=E-A:IFN>0THEN1340ELSEPRINT@320," PHASER FIRED AT
";
1330 PRINT@385," EMPTY SPACE";:GOSUB110:M=135:GOSUB1370:
GOTO880
1340 A=INT(A/N):FORM=135TO140:IFA(M)=0GOTO1360
1350 GOSUB1370:PRINT@320," ";S;"UNITS HIT ";:GOSUB1410
1360 NEXTM:GOTO1000
1370 IFA<1000THEN1390ELSEPRINT@256,"## OVERLOADED ##"
;
1380 J=4:A(67)=A(67)+1:GOSUB110:GOSUB1620
1390 I=A(M+6)-X:J=A(M+12)-Y:S=A*30/(30+I*J)*SQR(Z5*
ABS(A(70))+1)+1
1400 RETURN
1410 GOSUB3510:PRINT@385," KLINGON AT";:PRINT@449,"
SECTOR";
1420 PRINTA(M+6);A(M+12);:A(M)=A(M)-S
1430 IFA(M)>0PRINT@512,"** DAMAGED **";:GOSUB3570:RET
URN
1440 A(M)=0:I=8*U+V-9:J=A(I)/ABS(A(I)):A(I)=A(I)-100*J:
K=K-1
1450 I=8*A(M+6)+A(M+12)+62:A(I)=0:N=N-1
1460 PRINT@512,"## DESTROYED ##";:GOSUB3550:PRINT@896
," SPOCK: 'THERE ARE";K;"KLINGONS REMAINING':RETU
RN
1470 IFN=0RETURN
1480 GOSUB1250:PRINT@768,"KLINGON ATTACK";
1490 IFOPRINT@832,"STARBASE PROTECTS ENTERPRISE";:GOSUB
110:RETURN
1500 Z5=1:T=0:FORM=135TO140:IFA(M)=0THEN1540
1510 IFO=0THENGOSUB3500
1520 A=(A(M)+RND(A(M)))/2:GOSUB1390:T=T+S:I=A(M+6):J=A(
M+12)
1530 PRINT@832,S;"UNITS HIT FROM KLINGON AT SECTOR";I;J
;:PRINTCHR$(30):GOSUB3580
1540 NEXTM:Z5=0:E=E-T:GOSUB3620:IFE<=0THENRETURN
1550 FORJ=1TO7:IFA(J+63)GOSUB1620
1560 NEXTJ
1570 IFRND(INT(E/4))>0THENRETURN
1580 IFA(70)=0:A(70)=RND(T/75):J=7:GOSUB1620:RETURN
1590 J=RND(6):A(J+63)=RND(T/99)+A(J+63):I=RND(8)+1:C=C+
I
1600 PRINT@896,"MCCOY: 'SICKBAY TO BRIDGE, WE SUFFERED
";
1610 PRINTI;"CASUALTIES";CHR$(34);:GOSUB3660:RETURN
1620 GOSUB1250
1630 PRINT@192,"";:I=A(J+63):IFJ=1PRINT"SHORT RANGE SEN
SOR";:I2=-(I<0)
1640 IFJ=2PRINT"GALAXY MAR";:IFI2=0THENI2=1+(I<0)
1650 IFJ=3PRINT"LONG RANGE SENSOR";
1660 IFJ=4PRINT"PHASER";
1670 IFJ=5PRINT"ENGINES";:GOSUB3610
1680 IFJ=6PRINT"PHOTON TORPEDO TUBES";
1690 IFJ=7PRINT"SHIELD";
1700 IFJ=8PRINT"COMPUTER READY";:RETURN
1710 IFI=0RETURN
1720 PRINT@320," DAMAGED";I;:PRINT@384," STARDATES";
1730 PRINT@449,"ESTIMATED";:PRINT@513,"FOR REPAIR";:GOS
UB110
1740 IFJ=1I2=1:FORI=192TO906STEP64:PRINT@I,CHR$(30);:NE
XTI:RETURNELSERETURN
1750 GOSUB1250:PRINT@192,"STATUS REPORT";:PRINT@257,"ST
ARDATE";
1760 PRINTZ7-D;:PRINT@321,"TIME LEFT";D;
1770 PRINT@385,"CONDITION ";:IFOPRINT"DOCKED";:GOTO181
0
1780 IFNPRINT"RED";:GOTO1810
1790 IFE<999PRINT"YELLOW";:GOTO1810
1800 PRINT"GREEN";
1810 PRINT@449,"POSITION";:PRINT@514,"QUADRANT";U;V;:GO
SUB3610
1820 PRINT@578,"SECTOR";X;Y;:PRINT@641,"ENERGY";E;
1830 PRINT@705,"TORPEDOES ";F;:PRINT@768," KLINGONS LE
FT ";K;
1840 PRINT@833,"STARBASE ";B;:GOSUB110
1850 FORJ=1TO7:IFA(J+63)GOSUB1620
1860 NEXTJ:GOTO880
1870 J=5:GOSUB1620
1880 PRINT@833,"SECTOR DISTANCE ";:Q=849:GOSUB2760:W=I
1890 IFW<LANDW<-1THEN880
1900 IFW=-1THENW=24:PRINT@848,"";:PRINTUSING"#####";W;
1910 IF A(68)=0ORW<3THEN1930ELSEGOSUB1680:PRINT@320,"CH
EKOV:'WE CAN TRY";
1920 PRINT@384,"2 AT MOST, SIR";:GOSUB110:GOSUB1250:GO
TO1880
1930 IFW<99THEN1950ELSEW=99:PRINT@320,"SPOCK: 'ARE YOU
SURE";
1940 PRINT@384,"CAPTAIN ?";:GOSUB110
1950 IFEW*INT(W/2)THEN1970ELSEPRINT@448,"SCOTTY:'CAPTA
IN, WE";
1960 PRINT@512,"DON'T HAVE THE POWER";:GOSUB110:GOTO880
1970 GOSUB2500:IFI1=0THEN880
1980 D=D-1:E=E-W*INT(W/2):A(8*X+Y+62)=0
1990 Z6=0:P=45*X+22:G=45*Y+22:W=45*W:Z1=X:Z2=Y:M=0
2000 M=M+1:W=W-1LR:IFW<-22THEN2070
2010 P=P+S:G=G+T:I=P/45:J=G/45:IFI<1+(I>8)+(J<1)+(J>8)
THEN2090
2020 IFA(8*I+J+62)=0THENX=I:Y=JELSE2050
2030 Z6=Z6+1:IFI2=0THENPRINT@150+X*64+Y*5,"E";:PRINT@
(150+Z1*64+Z2*5),". ";
2040 E1=2/26[2+50000/(W+45)][2:Z1=X:Z2=Y:D=D-.006:GOSUB
120:IFM<8GOTO2000
2050 PRINT@384,"**EMERGENCY STOP**";:PRINT@448,"SPOCK:
'TO ERR IS";
2060 PRINT@512,"HUMAN";:GOSUB110
2070 A(8*X+Y+62)=4:GOSUB2080:GOTO1000
2080 FORM=64TO70:A(M)=A(M)+(A(M)<0):NEXTM:RETURN
2090 P=U*72+P/5+W/5*S/I1-9:U=P/72:IFI2=0THENPRINT@150+
Z1*64+Z2*5),". ";
2100 G=V*72+G/5+W/5*T/I1-9:V=G/72
2110 GOSUB2080:IFRND(9)<2PRINT@384,"***SPACE STORM***";
:100:GOSUB110:GOSUB1550
2120 IF(U>0)AND(U<9)AND(V>0)AND(V<9)X=(P+9-72*U)/9:GOTO
2750
2130 A=0:CLS:GOSUB3050:GOSUB3080:PRINT@448,"## YOU WAND
ERED";
2140 PRINT@512,"OUTSIDE THE GALAXY ##";
2150 M=RND(6):A=RND(400):E=E-A:D=D-M
2160 PRINT@576,"ON BOARD COMPUTER";:PRINT@640,"TOOK OVE
R, AND";
2170 PRINT@704,"SAVED YOUR LIFE";
2180 PRINT@768,"YOU WERE LOST";M;:PRINT@832,"DAYS AND U
SED";
2190 PRINT@895,STR$(A); " UNITS OF POWER";:GOSUB110:GOTO
350
2200 J=6:GOSUB1620:A=0:Q=0:IFITHEN880
2210 IFF=0THENPRINT@256," EMPTY";:GOTO880
2220 PRINT@256," LOADED";:GOSUB2500:IFI1=0GOTO880
2230 PRINT@832," TORPEDO FIRED";:PRINT@848,"";:F=F-1:P=
45*X+22:G=45*Y+22
2240 A=6:Q=3:I6=3:I7=-65:FORM=1TO8:GOSUB3610
2250 P=P+S:G=G+T:I4=P/15:I3=G/4.5:I=P/45:J=G/45
2260 IFI<1ORI>8ORJ<1ORJ>8THEN2350
2270 IFI>86I3=86
2280 IFI4>41I4=41
2290 L=8*I+J+62:W=8*U+V-9:I1=A(W)/(ABS(A(W))-1):IFI2<0
THEN2320
2300 SET((41+I3),(6+I4)):RESET((41+A),(6+Q)):A=I3:Q=I4
2310 IFA(L)=0THENGOSUB2390:GOTO2340
2320 IFA(L)>0THENGOSUB2390
2330 ONA(L)GOTO2370,2410,2440
2340 I6=I:I7=J:D=D-.004:NEXTM

```

```

2350 IF I2=0 THEN RESET ((41+A), (6+Q)): GOSUB 2390
2360 PRINT@897, "----MISSED---";: GOSUB 110: GOTO 10
2370 S=RND(99)+280: FORM=135 TO 140: IF (A(M+6)=I) AND (A(M+12)
=J): GOSUB 1410: GOTO 1000
2380 NEXT M: GOTO 1000
2390 IF I2=0 THEN PRINT@ (150+I6*64+I7*5), ". ";
2400 RETURN
2410 GOSUB 3520: B=B-1: O=0: A(L)=0: A(W)=A(W)-10*I1: PRINT@7
68, "STARBASE DESTROYED"
2420 PRINT@832, "SPOCK: 'I OFTEN FIND HUMAN BEHAVIOR FAS
CINATING.'";
2430 GOSUB 3550: GOTO 1000
2440 GOSUB 3520: PRINT@897, "HIT A STAR"; CHR$(30);
2450 IFRND(9)<3*PRINT "TORPEDO ABSORBED": GOSUB 3560: GOTO 1
000
2460 A(L)=0: A(W)=A(W)-1: IFRND(9)<6*PRINT@897, "STAR DEST
ROYED": GOSUB 3550: GOTO 1000
2470 T=300: PRINT@897, "IT'S A NOVA ***RADIATION ALARM***
";: GOSUB 3550
2480 IF O THEN GOSUB 1490 ELSE GOTO 1000
2490 GOSUB 110: GOTO 1000
2500 PRINT@897, "COURSE (0-360) ";: Q=912: GOSUB 2760
2510 IF I>360 OR I<-1 THEN I1=0: RETURN
2520 IF I=-1 THEN I1=23: PRINT@912, " ";: PRINT USING "####"; I;
2530 S=(I+45)/90: I1=I-S*90: I1=(45+I1)/110+45
2540 IF I/45<>INT(I/45) THEN I1=I-SGN(I)*(3-(S=2))
2550 S=S+1: ONSGOTO 2560, 2570, 2580, 2590
2560 S=-45: T=I: RETURN
2570 S=I: T=45: RETURN
2580 S=45: T=-I: RETURN
2590 S=-I: T=-45: RETURN
2600 J=8: GOSUB 1620: PRINT@704, "ENTER DESIRED";: PRINT@768
, "TARGET LOCATION";
2610 PRINT@833, "SECTOR Y AXIS";: Q=846: GOSUB 2760: Z1=I
2620 PRINT@897, "SECTOR X AXIS";
2630 Q=910: GOSUB 2760: Z2=I: 1*PZ1<10RZ1>80RZ2<10RZ2>8 THEN 2
600
2640 Z1=X-Z1: Z2=Z2-Y: IF Z1=0 AND SGN(Z2)=1 THEN Z3=90: GO
TO 2690
2650 IF Z1=0 AND SGN(Z2)=-1 THEN Z3=270: GOTO 2690
2660 IF Z2=0 AND SGN(Z1)=1 THEN Z3=0: GOTO 2690 ELSE IF Z1=0 AND
Z2=0 THEN 2600
2670 IF Z2=0 AND SGN(Z1)=-1 THEN Z3=180: GOTO 2690
2680 Z3=57.295775*ATN(Z2/Z1): IF SGN(Z1)=1 AND SGN(Z2)=1
THEN 2720
2690 IF SGN(Z1)=-1 AND SGN(Z2)=1 THEN Z3=Z3+180: GOTO 272
0
2700 IF SGN(Z1)=-1 AND SGN(Z2)=-1 THEN Z3=Z3+180: GOTO 27
20
2710 IF SGN(Z1)=1 AND SGN(Z2)=-1 THEN Z3=Z3+360: GOTO 272
0
2720 Z4=SQR(Z1^2+Z2^2)+.5: PRINT@850, " ANGLE ="; Z3;
2730 PRINT@914, " RANGE ="; Z4;
2740 GOTO 800
2750 CLS: A=6: GOSUB 3050: GOSUB 3080: Y=(G+9-72*V)/9: GOTO 360
2760 PRINT@Q, Z: A$=INKEY$: IF A$=" " THEN GOSUB 3610: GOTO 2760
2770 IF ASC(A$)=8 THEN Z=Z/10: GOTO 2760 ELSE IF A$="C" THEN I1=-1
: RETURN
2780 IF ASC(A$)=13 THEN I1=2: Z=0: RETURN ELSE Z=Z*10+VAL(A$): G
OTO 2760
2790 A=0: CLS: GOSUB 3050: PRINT@130, STRING$(23, 191);
2800 PRINT@235, STRING$(13, 176);
2810 PRINT@238, STRING$(7, 188);
2820 PRINT@293, STRING$(24, 191);
2830 PRINT@363, STRING$(13, 131);
2840 PRINT@366, STRING$(7, 143);
2850 PRINT@399, STRING$(26, 191);
2860 PRINT@466, STRING$(26, 191);
2870 PRINT@533, STRING$(26, 191);
2880 FOR Z1=50 TO 56 STEP 6: FOR Z2=9 TO 18: SET(Z1, Z2): NEXT Z2, Z1
2890 PRINT@357, CHR$(170);: PRINT@360, CHR$(170);
2900 PRINT@425, CHR$(179);: PRINT@492, CHR$(179);: PRINT@55
9, CHR$(179);
2910 PRINT@472, " USS ENTERPRISE ";
2920 IF V=0 THEN 2950 ELSE RETURN
2930 FOR U=1 TO 150: B=RND(30): Q=64*RND(13)+B*2: C=32+B: PRIN
T@Q, STRING$(B, G);
2940 NEXT U: RETURN
2950 PRINT@897, "CAPTAIN'S LAUNCH APPROACHING ";
2960 PRINT "ENTERPRISE - STANDBY FOR ACTION";
2970 FOR A=1 TO 12: READ B, B: NEXT A: GOSUB 3450
2980 FOR A=0 TO 11: READ C(A), Z(A): NEXT A: RESTORE: GOSUB 3450
2990 FOR A=0 TO 11: FORM=0 TO 11
3000 READ B(M, A, 1), B(M, A, 2)
3010 DATA 0, 0, 1, 0, 2, 1, 3, 1, 6, 2, 9, 3, 12, 4, 18, 6, 27, 9, 42, 14,
63, 21, 63, 21
3020 DATA -1, .5, 1, -.5, -.5, -.5, -1, .5, -1, 1, 1, -1, -.5, .5, 1, -.5,
1, -1, -1, 1, -1, 1, .5
3030 B(M, A, 1)=B(M, A, 1)*C(A)+64.5: B(M, A, 2)=B(M, A, 2)*Z(A)
+24.5: NEXT M
3040 GOSUB 3450: RESTORE: NEXT A: RETURN
3050 I2=1: Z8=1: FORM=ATO1000 STEP 16: PRINT@ (M+RND(16)), ". "
;: NEXT M: RETURN
3060 FORM=1 TO 11: SET(B(M, A, 1), B(M, A, 2)): RESET(B(M-1, A, 1),
B(M-1, A, 2)): NEXT M: A=A+1
3070 RETURN

```

```

3080 GOSUB 3060: GOSUB 3610: IFA<12 THEN 3080
3090 PRINT@544, " ";: RETURN
3100 PRINT@768, "DO YOU WANT INSTRUCTIONS ? ";
3110 A$=INKEY$: IFA$=" " THEN 3110 ELSE B=-(A$="N")
3120 IF B=1 THEN 230
3130 CLS: PRINT "THIS IS AN ACTION TASK IN WHICH TIME IS
AN IMPORTANT FACTOR"
3140 GOSUB 110
3150 PRINT "LEGEND FOR ALL OPERATIONS APPEARS AT THE TOP
OF THE SCREEN": GOSUB 110
3160 PRINT "ENTER THE FLASHING LETTER FOR ACTION DESIRED
": GOSUB 110
3170 PRINT "DIRECTION IS IN COMPASS ANGLES 0(1) 90(2); CHR
$(94); 180(3); CHR$(92);
3180 PRINT") 270(4); CHR$(93);": GOSUB 120: PRINT "THE COMP
UTER CAN PROVIDE";
3190 PRINT "CONTROL FOR THE TORPEDO AND ENTERPRISE": GOS
UB 110
3200 PRINT "THE (Y) AXIS IS [ AND THE (X) AXIS IS -"; CHR
$(94): GOSUB 110
3210 PRINT "ENTER (C) COMPUTER, SELECT (T) ORPEDO OR (E) NGI
NE, AND ENTER (C)"
3220 GOSUB 110: PRINT "ACTION IS AUTOMATIC": GOSUB 110
3230 PRINT "THE LONG RANGE SENSOR DISPLAYS": GOSUB 110
3240 PRINT TAB(10) "THE HUNDRED DIGIT AS THE NO. OF KLING
ONS": GOSUB 110
3250 PRINT TAB(10) "THE TENS DIGIT AS THE NO. OF STARBASE
S": GOSUB 110
3260 PRINT TAB(10) "THE UNIT DIGIT AS THE NO. OF STARS": G
OSUB 110
3270 PRINT "WHEN YOU PRESS ENTER - THE ACTIVITIES WILL S
TART": GOSUB 110
3280 PRINT "THE ENTERPRISE WILL ENTER SUB-SPACE AND TRAV
EL TO ";
3290 PRINT "YOUR STATION": GOSUB 110: PRINT "GOOD LUCK ON YO
UR EFFORT !!!": GOSUB 110
3300 A$=INKEY$: IFA$=" " THEN 3300 ELSE 230
3310 PRINT@ (137-Z), CHR$(132);: IF Z<0 THEN PRINT " "; ELSE PR
INT@128, " ";
3320 Z=Z+1: IF Z=10 THEN Z=0
3330 RETURN
3340 FOR A=1 TO 7: FORM=1 TO 3: I=128-48*(M=1)-60*(M=2)-63*(M
=3)
3350 E1=.2*A*(1-(A=7)*M(2)): GOSUB 120
3360 PRINT@ (961-64*A), CHR$(I);: PRINT@ (1022-64*A), CHR$(I
);
3370 PRINT@ (1025-64*A), CHR$(191); STRING$(30, 1);
3380 PRINT STRING$(30, 1); CHR$(191);
3390 GOSUB 3310: NEXT M, A
3400 PRINT@128, STRING$(10, 32);
3410 FORM=1 TO 7: PRINT@ (513-64*M), CHR$(191);
3420 PRINT@ (574-64*M), CHR$(191);: NEXT M
3430 PRINT@66, STRING$(30, 131);
3440 PRINT@980, " S T A R B A S E"; U+8*V;: GOSUB 110: RETU
RN
3450 Q=Q+1: IF Q<18 THEN PRINT@ (510-Q), CHR$(140); CHR$(140);
CHR$(32);: RETURN
3460 IF Q=18 THEN PRINT@896, CHR$(30);: PRINT@492, CHR$(191);
CHR$(140); " ";
3470 IF Q=19 THEN PRINT@493, " ";
3480 IF Q=20 THEN PRINT@492, CHR$(179);
3490 RETURN
3500 I8=149+64*X+5*Y: GOTO 3530
3510 I8=149+64*A(M+6)+5*A(M+12): GOTO 3530
3520 I8=149+64*I+5*J
3530 IF I2=0 THEN PRINT@I8, CHR$(136); CHR$(174); CHR$(140);
3540 RETURN
3550 A$=" ": GOTO 3590
3560 A$="*": GOTO 3590
3570 A$="K": GOTO 3590
3580 A$="E"
3590 GOSUB 110: IF I2=0 THEN PRINT@ (I8-2), " "; A$; " ";
3600 RETURN
3610 PRINT@58, " ";: PRINT USING "###.###"; D;: I5=I5+1: D=D-.00
2: IF D>0 THEN RETURN ELSE 440
3620 PRINT@123, " ";: PRINT USING "#####"; E;: RETURN
3630 PRINT@104, " ";: PRINT USING "#####"; F;: RETURN
3640 Z=0: GOSUB 2930: CLS: PRINT@512, "SIR ! WE HAD A COMPU
TER OVER LOAD AND LOST";
3650 PRINT "ALL GALAXY DATA": FOR A=0 TO 63: A(A)=-ABS(A(A))
: NEXT A: GOSUB 120: CLS: RESUME 360
3660 Z1=8*U+V-9: FORM=135 TO 140: IFA(M)<0 THEN NEXT M: RETURN
3670 FOR A=U+(U<1) TO V-(U>8): FOR Q=V+(V<1) TO V-(V>8): Z2
=8*A*Q-9: IFA(68)=4 THEN 3690
3680 IF ABS(A(Z2))>99 AND Z2<Z1 THEN A(Z2)=SGN(A(Z2))*(ABS(
A(Z2))-100) ELSE NEXT Q: A: RETURN
3690 A(Z1)=A(Z1)+100
3700 A=RND(8): Q=RND(8): Z1=8*A+Q+62: IFA(Z1)<0 THEN 3700
3710 A(Z1)=1: N=N+1: IF I2=0: PRINT@ (150+64*A+5*Q), "K";
3720 A(M)=300: A(M+12)=Q: A(M+6)=A: RETURN
3730 Z=0: RESUME 1250

```

DONE

THE TIME SAVER...



JPC Products Announces a New High Speed Cassette System "The Poor Man's Floppy" for the TRS-80* \$90 Kit - \$120.00 fully assembled.

The TRS-80* is a great small computer. But its cassette recording system can be very frustrating, particularly if you can't read an important cassette. JPC Products Company has developed an improved cassette system that uses your present cassette recorder but operates much faster with better reliability. The TC-8 plugs into the expansion connector on the back of the keyboard and saves and loads 5 times faster! Less than ONE BAD LOAD in a MILLION BYTES! With the VOLUME CONTROL ANYWHERE BETWEEN 1 AND 8. The TC-8 is available in an easy to assemble kit or fully assembled. JPC has an exclusive "can't fail" kit guarantee. If you build the TC-8 and for any reason it doesn't work, we will make it work at NO COST. All you have to pay is the shipping. We guarantee it. The TC-8 magic is partly done in software. So you have to load a small program in upper memory. It is usually out of the way there. We provide the software on a cassette that comes with the TC-8. Just load it in. Here's how you order. Send

\$90.00 for the kit (\$120.00 fully assembled) plus \$3.50 postage and handling to JPC Products Co., 12021 Paisano Court, Albuquerque, NM 87112 (N.M. Res. add 4% sales tax.) Credit card orders accepted by phone or mail.



✓ 190

*Trademark of Tandy Corporation

Phone: (505) 294-4623 12021 Paisano Ct. Albuquerque, N.M. 87112

★★★ A PERCOM BULLETIN ★★★


Adapter for TRS-80* computer eliminates disk read errors

Garland, Texas — Harold Mauch, president of Percom Data Company, announced that the company is marketing a simple plug-in adapter for TRS-80* computers that corrects a design deficiency in the disk controller circuit.

The problem, which causes disk read errors, has been traced to Tandy's reliance on a circuit internal to the FD1771 controller IC to perform the function of separating clock and data pulses.

As explained in the *Backgrounder*, use of the internal chip circuit for reliable data-clock separation is a design shortcut which the manufacturer of the controller IC warns against.

The Percom solution, a PC card adapter called the SEPARATOR™, eliminates the problem by substituting an explicit data separator circuit

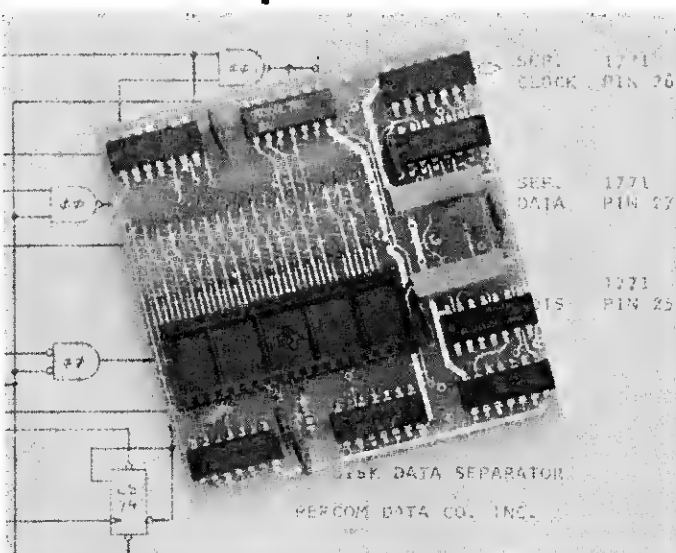

Percom adapter fixes TRS-80* computer disk controller.

— one which has been used reliably in Percom disk controllers since 1977 — for the internal IC separator circuit.

the host controller, installs the IC in the DIP socket on the SEPARATOR™ card, and plugs the adapter into the vacated socket of the host controller.

Percom cautions that opening the Expansion Interface of the TRS-80* computer, which is required to install the SEPARATOR™, may void the computer's limited 90-day warranty.

The SEPARATOR™, which sells for \$29.95, may be purchased from Percom dealers or ordered direct from the factory. The Percom toll-free order number is 1-800-527-1592.

Payment for mail orders may be made by certified check, cashier's check or money order, or charged to a Master Card or VISA account. Texas residents must add 5% sales tax.

Percom Mini-Disk Drives Store More, Cost Less.



Percom mini-disk drives store more data, are more reliable, yet a 40-track Percom drive costs \$100.00 less than a 35-track Tandy drive.

You can store over 102 Kbytes per side on Percom TFD-100™ 40-track drives; 197 Kbytes on one side of a TFD-200™ 77-track drive. A patch — supplied free on minidiskette — upgrades TRSDOS* for operation with the newer 40- and 77-track drives.

Both TFD-100™ and TFD-200™ models are available in one-, two- and three-drive configurations.

Prices start at \$399 for a single-drive TFD-100™, \$675 for a single-drive TFD-200™. Drives are supplied with heavy-duty power supplies. Metal enclosure is finished in compatible silver enamel.

See your nearby Percom dealer or order direct by calling toll-free 1-800-527-1592.

Five-Inch Disks Store More Than Eight-Inch Disks!

Garland, Texas — June 25, 1980 — Percom Data Company has begun production of a double-density disk controller adapter for TRS-80* Model I computers.

Harold Mauch, president of Percom, made that announcement here today, saying that data storage capacity using the adapter and double-density disk operating system — which is included — can be increased to as much as 294 Kbytes per minidiskette.

By comparison, the maximum storage for larger eight-inch disk systems used with the TRS-80*

Model I computer is about 290 Kbytes.

Mauch said the PC card adapter, which plugs into the controller chip socket of the computer Expansion Interface, works equally well for either single-density or double-density storage, and users may continue to run programs under TRSDOS*, OS-80™ and other single-density operating systems with the adapter installed.

Price, for the plug-in adapter, the TRSDOS*-like double-density DOS and a utility for converting files and programs from single- to double-density format is expected to be \$219.95.

BACKGROUNDERS CRC ERROR! TRACK LOCKED OUT!

by the Technical Staff
Percom Data Company

This problem started while we were studying an annoying problem with the TRS-80* computer. Disk drives sold by Percom are realigned and tested before shipment. We noticed, however, that some disk drives would pass the Percom inspection but just would not work reliably on the inner tracks with a TRS-80* computer. These drives were within the manufacturer's specifications, and would function perfectly on other disk systems Percom manufactures — "perfectly" here meaning more than 50 million bytes read without error!

The disk read data separation arrangement in the TRS-80* computer Expansion Interface uses an internal data separator of the FD1771 disk formatter/controller IC. Use of the FD1771 internal data separator is not recommended by Western Digital, the IC manufacturer. The following note appears on page 17 of the FD1771 data sheet:

Internal data separation may work for some applications. However, for applications requiring high data recovery reliability, WDC recommends external data separation be used.

We suspected the data separator because the problem was most severe on disk inner tracks where storage density is highest and data separation is most critical.

To prove our point, a technician breadboarded a standard Percom data separator circuit, and configured it to plug directly into the FD1771 IC socket of the TRS-80* computer controller.

When connected to the TRS-80* computer, a troublesome drive functioned perfectly! We ran a BACKUP utility many times and never got a track lock-out. Before we added the external data separator circuit to the computer, this same drive would always lock out tracks, and would have difficulty reading from the inner (higher number) tracks.

The Percom data separator circuit fixes the mini-disk controller of the TRS-80* computer. The type of drives being used is irrelevant; the circuit eliminates disk read errors resulting from the inability of the Tandy controller design to reliably separate clock and data signals when reading high density inner tracks.

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

✓ 258 PERCOM DATA COMPANY, INC. 211 N. Kirby Street Garland, Texas 75042 (214) 272-3421

™ trademark of Percom Data Company, Inc.

*trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

Destroy enemy spacecraft—with your 4K Level II.

Starfighter

Albert C. Ferrera
RD #2, Box 325
Oneonto, NY 13820

I am a dedicated amateur astronomer turned computerist. I wanted to design a space battle game that involved as much realism as possible within the rather severe limit of my 4K machine. The following program

is what I came up with, including audio.

The program illustrates what a space pilot might see looking out his cockpit window on a real space battle. It creates a random constellation of five to fifteen stars for each game and maintains them through all the action. The distant suns must remain unaffected by foreground events.

Missile System

The object is to destroy a

hostile fighter viewed through your ship's window. Your ship is armed with a missile system, but like real systems, the missiles are not perfect and your best bet is to fire a salvo that will form a cluster around your target coordinates. Hopefully, the cluster will include the hostile fighter.

You have to fire by feel to a considerable extent. After a number of games you will learn to control your fire and your score will improve.

The hostile fighter also has weapons and, if you do not score on your first salvo, its capabilities may well be demonstrated to you. He has two wingtip guns that can blaze back at you and can choose almost any moment (even during your salvo) to return your fire. If he scores, your little microcosm comes apart at the seams.

Since his weapons do not travel at light speed, you have a brief moment between his gun flashing and his missiles striking to contemplate your sins.

The hostile has several other tricks. On occasion he disappears through a stargate or space warp and leaves the field making quite a flash as he goes. (I admit it. I do watch Buck Rogers.) Sometimes, too, he leaves the view from your window. In a moment he returns to continue the encounter.

A stand-off results if you run out of missiles and disengage, or the hostile leaves through a

stargate. The computer displays the number of missiles you have left. It also displays the coordinates of your last salvo.

If you run out of missiles and the fighter is still intact, he has the option of shooting at you before stargate takes him out of reach. If you damage his ship before your missiles are depleted, the hostile fighter escapes beyond the stargate, leaving you to contemplate the starry sky till the next game.

Direct Hit

In order to bag your opponent, you have to score a direct hit on his cockpit. This causes his fighter to come apart rather violently. If you hit him around the edges, your controls will indicate DAMAGE.

You can shoot up his wings and the computer will keep track of the missing pieces and print out what remains of your opponent after he moves. As long as his cockpit is intact he will survive.

A non-lethal hit gives you two advantages. First, you disable your opponent's weapons. Further, his mobility will be considerably reduced, making it easier for you to finish him.

As written, there is about an even split between wins, losses and draws. However, you can change the odds. Line 190 controls the missile supply, and you can increase it, if you wish.

Line 356 controls the chance that you will get fired at during

Variable	Program Function
A	Salvo size (1 to 4).
B	Row 1 star position. Also random variable and loop counter.
C	Horizontal set point of left hostile fighter gun.
D	Vertical set point of left hostile fighter gun.
E	Leftmost print position of hostile ship.
F	Array variable label (star position). Also array variable loop counter.
G	Random variable to determine E shift position. Also loop counter.
H	Horizontal aim point.
I	Salvo loop counter.
J	Number of stars.
K	Upper left set point of E (horizontal coordinate). Also used (line 334) as the print at position that includes the missile set point.
L	Upper left set point of E (horizontal coordinate). Also used (line 334) as the print at position that includes the missile set point.
M	Missile deflection random variable (horizontal coordinate).
N	Missile deflection random variable (vertical coordinate).
O	Number of missiles available.
P	Damage flag for hostile ship character < (location E).
Q	" " " " " " " - (left).
R	" " " " " " " 0.
S	" " " " " " " - (right).
T	" " " " " " " > (right).
U	Random variable to determine if GOS 2000 (hostile fighter fire routine). Also used in hostile fighter explode routine (lines 6000-6060) as a loop counter.
V	Vertical aim point.
W	Ship explosion reference print at point. There is one for each star on the playing field.
X	Set point coordinate. (horizontal)
Y	Set point coordinate. (vertical)
Z	Random variable to determine if enter Stargate routine.
A(F)	Star position print at point.

Table 1. List of Variables Used.

Lines	Program Function
10-35	Initialize system.
50-76	Establish playing field format.
100	Establish initial hostile fighter position-E.
105	Check field boundaries.
110	Print hostile fighter.
152	Choose number of stars (5 to 15).
154-164	Choose star positions. Check if hostile position interferes. If not, print star. If so, choose new star position and print star.
190	Choose number of missiles.
200-203	Erase old input.
205-225	Input new fire control data.
300-331	Set missile hit position.
334	Calculate the print point that includes missile set point.
338-342	Check for hit on hostile and set damage flags P,Q,R,S,T. Note: R is the kill flag.
350	Reset missile hit. Reprint each star unless hostile covers it.
356	Decide if hostile returns fire.
357	Update missiles remaining; print out.
362	If no missiles remain, print hostile damage status. If hostile is missed, give hostile a chance to return fire. If hostile misses, then Stargate.
363	If hostile is not missed or killed, print DAMAGED, then Stargate.
365	Loop to fire next missile.
370-380	Print hostile damage status, if missiles are remaining.
475-480	Determine whether hostile returns fire.
500-760	Determine new hostile position. Consider damage, if any, and print remaining parts of hostile at new position.
766-767	Determine whether hostile returns fire.
770-790	Choose, if Stargate, if not, return for another salvo.
800-920	Stargate routine ending.
1000-1180	Determine new hostile ship based on missile damage flags.
2000-2060	Hostile fighter gun fire routine.
2090	Choose, if hostile fire effective. If yes, branch to ship destruct routine.
2105	Replace stars removed by hostile fighter fire.
3000-3060	Ship destruct routine ending.
4000	Delay loop.
5000-5100	Star replace routine including check for hostile position.
6000-6060	Hostile fighter explodes, if cockpit is hit routine.

Table 2. Program Summary.

or after a salvo. If you increase $U = \text{RND}(3)$ to a larger random number you get shot at less often.

Lines 766-767 determine if you will be fired on after the hostile fighter moves. Likewise increase $U = \text{RND}(2)$ for a safer game.

Line 770 controls the chance of a stargate. Increase $Z = \text{RND}(5)$ to make the hostile stick around longer.

Audio

Oh yes, I mentioned audio. For me it was easy, since my computer shares my cassette deck with my high fidelity system. However, you can hear your computer by placing a portable FM radio near it and picking up the digital noise at numerous places on the dial. The sound effects end with the 500 hz tone of FOR-NEXT loops being counted waiting for the next game.

One final suggestion. Turn down the screen brightness until a dark sky appears, as free of light pollution as possible. This

makes the constellations look much more realistic. (I wonder what Orion would look like from a vantage point in Cygnus? Well, I admit the graphics aren't that good!)

I omitted instructions and used many abbreviations to make room for the program. However, the screen instructions are quite specific.

As written my computer returns a PRINT MEM. of 122 bytes. A maximum of 60 bytes are used when the star position array spins up. You have only 62 bytes to spare and cannot take too many liberties typing the program or adding features.

Also the program is not protected against illegal inputs, so if you enter bad input, you have to hit BREAK and then RUN again.

Also, on rare occasions the program crashes with a sorry statement: The sorry returns a ? after the FOR of a legal FOR-NEXT loop, usually line 2500. The problem has defied my analysis; there is no lack of user

RAM. It may be because of some kind of overflow condition in the BASIC monitor or internal scratch pad. Whether peculiar

to my series machine or not I cannot say. I hope someone solves it. It is my only problem with the program. ■

Program Listing

```

1 REM STARFIGHTER BY ALBERT C. FERRERA 11/4/79
10 CLS
35 P=0:Q=0:R=0:S=0:T=0
50 FORX=6TO119:SET(X,0):SET(X,36):NEXTX
60 FORY=0TO36:SET(6,Y):SET(119,Y):NEXTY
76 PRINT@189,"M";:PRINT@381,"H";:PRINT@573,"V";
100 B=RND(45)+7:E=64*RND(10)+B
105 IF(E<128)+(E>703)THEN100
110 PRINT@E,"<-O->";
152 J=5+RND(10)
154 FORF=1TOJ
156 B=RND(45)+7:A(F)=64*RND(10)+B
161 IF(A(F)=E)+(A(F)=E+1)+(A(F)=E+2)+(A(F)=E+3)+(A(F)=E+4)THEN156
162 IF(A(F)=E-1)THEN156
163 NEXTF
164 FORF=1TOJ:PRINT@A(F),"*":NEXTF
190 O=RND(9)+9
200 PRINT@834,"";
202 PRINT@898,"";
203 PRINT@936,"";
205 PRINT@252,O;
210 PRINT@834,"HORIZONTAL AIM POINT (0 TO 100)";:INPUT
H
212 PRINT@444,H;
220 PRINT@898,"VERTICAL AIM POINT (0 TO 30)";:INPUTV
223 PRINT@636,V;
225 PRINT@936,"SALVO SIZE (1 TO 4)";:INPUTA:IFA>4A=4
300 FORI=1TOA
310 M=RND(10):N=RND(5)
330 X=H-M+18:Y=V-N+6
332 SET(X,Y)
334 K=INT(X/2)+64*INT(Y/3)
338 IFK=EP=1
339 IFK=E+1Q=1
340 IFK=E+2R=1
341 IFK=E+3S=1
342 IFK=E+4T=1
345 GOSUB4000
347 IFR=1GOTO6000
350 RESET(X,Y):GOSUB5000
355 U=RND(3):IFU+P+Q+S+T<2GOSUB2000
357 O=O-1:PRINT@252,O;
362 IFO+P+Q+S+T=0PRINT@886,"MISS";:GOSUB2000:GOTO800
363 IFO=0PRINT@886,"DAMAGED";:GOTO800
365 NEXTI
370 IFP+Q+R+S+T=0PRINT@886,"MISS";:GOTO475
375 IFP+Q+S+T=0PRINT@886,"DAMAGED";:GOTO475
380 PRINT@886,"KILL";
390 FORG=1.2000:NEXTG:GOTO10
475 U=RND(2)
480 IFU+P+Q+R+S+T<2GOSUB2000
500 PRINT@E,"";
510 G=RND(6)
515 IFP+Q+S+T=0THEN600
520 IFG=1E=E+RND(8)
530 IFG=2E=E-RND(8)
540 IFG=3E=E+64+RND(8)
550 IFG=4E=E+64-RND(8)
560 IFG=5E=E-64+RND(8)
570 IFG=6E=E-64-RND(8)
595 GOTO700
600 IFG=1E=E+RND(2)
610 IFG=2E=E-RND(2)
620 IFG=3E=E+64+RND(2)
630 IFG=4E=E+64-RND(2)
640 IFG=5E=E-64+RND(2)
650 IFG=6E=E-64-RND(2)
700 IFE<0E=E+64:IFE>757E=E-64
710 K=2*(E-64*INT(E/64)):L=3*INT(E/64)
720 IF(K<8)+(K>106)+(L<5)+(L>30)THEN510
760 GOSUB1000:GOSUB5000
766 U=RND(2)
767 IFU+P+Q+R+S+T<2GOSUB2000
770 Z=RND(6)
780 IF(Z=2)*(E>128)*(E<703)THEN800
790 GOTO200
800 GOSUB4000
810 PRINT@E-64,"* *":PRINT@E+64,"* *":GOSUB1000:
GOSUB4000
820 PRINT@E-64,"* *":PRINT@E,"O *":PRINT@E+64,"
* *":GOSUB4000
830 PRINT@E-64,"* *":PRINT@E,"* *":PRINT@E+64,"*
*":GOSUB4000
840 PRINT@E-64,"* *":PRINT@E,"O *":PRINT@E+64,"
* *":GOSUB4000
850 PRINT@E-64,"* *":PRINT@E,"O *":PRINT@E+64,"
* *":GOSUB4000
860 PRINT@E-64,"* *":PRINT@E,"* *":PRINT@E+64,"
* *":GOSUB4000
870 PRINT@E-64,"* *":PRINT@E,"*****":PRINT@E+64,"
* *":GOSUB5000

```

```

880 PRINT@E," *** ";:GOSUB4000
890 PRINT@E," * ";:GOSUB4000:PRINT@E," ",:E=1
910 PRINT@890,"STARGATE : HOSTILE ESCAPED"
920 GOSUB5000:GOTO390
1000 IFP=0PRINT@E,"<";
1020 IFP=1PRINT@E," ";
1040 IFQ=0PRINT@E+1,"-";
1060 IFQ=1PRINT@E," ";
1080 PRINT@E+2,"O";
1100 IFS=0PRINT@E+3,"-";
1120 IFT=0PRINT@E+4,">";
1140 IFT=1PRINT@E+4," ";
1160 IFS=1PRINT@E+3," ";
1180 RETURN
2000 C=2*(E-64*INT(E/64))-1:D=3*INT(E/64)+1
2010 FORG=1TORND(9)
2020 SET(C,D):GOSUB2500:RESET(C,D):GOSUB2500
2040 SET(C+11,D):GOSUB2500:RESET(C+11,D):GOSUB2500
2060 NEXTG
2090 B=RND(2):IFB=1GOSUB3000
2105 GOSUB5000:RETURN
2500 FORB=1TO10:NEXTB:RETURN
3000 FORF=1TOJ
3020 W=A(F)+RND(20)
3030 PRINT@W-128," ! ";:PRINT@W-64," XXX ";:PRIN
T@W,"-XXXX-";
3040 PRINT@W+64," XXX ";:PRINT@W+128," ! ";
3050 NEXTF
3055 PRINT@345,"SHIP EXPLODING";
3060 GOTO390
4000 FORG=1TO300:NEXTG:RETURN
5000 FORF=1TOJ
5010 IF(A(F)=E-1)+(A(F)=E)+(A(F)=E+1)+(A(F)=E+2)THEN51
00
5020 IF(A(F)=E+3)+(A(F)=E+4)THEN5100
5050 PRINT@A(F),"*";
5100 NEXTF:RETURN
6000 PRINT@E+2,"*";:FORU=1TO100:NEXTU
6010 PRINT@E+1,"(");:FORU=1TO100:NEXTU
6020 PRINT@E+1," )";:FORU=1TO75:NEXTU
6030 FORU=1TO30:PRINT@E-1+RND(4),"*";:NEXTU
6040 FORU=1TO10:PRINT@E+63+RND(5),".";:GOSUB2500
6045 PRINT@E-65+RND(5),".";:GOSUB2500
6050 PRINT@E-1+RND(4)," ";:NEXTU:GOSUB4000:PRINT@E,"
";
6060 PRINT@E+64," ";:PRINT@E-64," ";:GOSUB5000
:GOTO390

```

MORE FROM MANHATTAN

APPLICATIONS

CALCULATOR PLUS makes your TRS-80 a printing calculator, or an excellent on-screen calculator without a printer. Chain and mixed calculations, memories for answer storage or calculations with constants. On-screen or printed review of long add-and-subtract operations. Optional dollar format. MPC-1 \$9.95

CHECKBOOK PLUS solves the problem of monthly bank statement reconciliation, without cumbersome tape record-keeping. Just do your checkbook once a month and let Checkbook Plus handle all the details and find the errors. MCB-1 \$9.95

CALCULATOR & CHECKBOOK PLUS on one cassette. MC-2 \$14.95

THE LISTMAKER Powerful, versatile program allows entry of 400 names or items, with codes, in 16K. Lists by code on-screen or to printer. Sorts, provides editing of entry or code, dumping, loading lists. Pull any category from list in seconds. MLM-1 \$9.95

DIVERSIONS

GIN RUMMY 2.0 plays a strong game, good enough to challenge an expert player. Plays a full regulation game, keeps score to game and changes strategy to counter opponent's play. A program you'll enjoy playing against and trying to beat. MGR-1 \$14.95

LABYRINTH RUN A fast action game, racing through sharp turns, slaloms and narrowing passages. Set a record time—or hit a wall and you're out. Each labyrinth has Sprint and Full courses, with three levels of skill. A fascinating test of coordination and skill. High speed graphics. MLR-1 \$9.95

E.S.P. LAB Based on the famous Duke University experiments. The computer selects symbols at random to display on the screen for E.S.P. trials. Analyzes trial results for direct telepathy, precognition, postcognition. Special tests for precognition and telekinesis. Machine-language graphics. MTL-1 \$9.95

MANHATTAN SOFTWARE, Inc. ✓90
P.O. Box 5200 Grand Central Station
New York City, New York 10017

The ASSISTANT™

Get Control of Your Level II

Add 8 new and 3 user definable commands. Break key control (on/off) - enable/disable all monitor printing - 245 computer speeds and more. Use as programming tool and under software control... includes debounce routine.

Special Introductory 1/2 Price Offer until September. Basic listing \$5.00. Tape \$7.50. Complete documentation and sample applications. Specify 4, 16, 32, 48k, 449 byte utility.

The GREAT CRANE GAME MACHINE™

"ACTION GRAPHICS"—machine language speed. In this construction skill game you pick up beams and columns with the crane, then lower them into position... but be careful if not properly supported —

DESTRUCTION!

Watch out for the trolls. \$7.50. 16k tape. Add \$1.50 tape orders.

Where proven software is still affordable
FREE CATALOG

The Berg Works

BOX 742 A

JANESVILLE, WI 53545

at last, a

PROGRAM EDITOR FOR TRS-80 BASIC

Tired of 'one line at a time' program editing? Now, with the help of **THE SOUTHEASTERN TEXTAN**, you can enter your BASIC programs in a video oriented text editor. Simply start typing. To make a change, just move the non-destructive cursor over the character and type on top of it!

This editor was written for TRS-80 BASIC, not adapted to it. **THE SOUTHEASTERN TEXTAN** is totally in machine code for speed and compactness.

FEATURES INCLUDE:

- Reads tapes written in BASIC
- Returns to BASIC with program ready
- One key entry of key words like PRINT
- Selectable auto line numbering
- Edit any line while in insert mode
- Append programs
- Block delete
- Search and replace
- Full cursor movement
- Auto repeat any key

Requires Level II and 16K or more

REPEAT KEY

Repeats any key held down for more than one second until key is released. Requires Level II BASIC. Will work with almost any amount of memory.

THE SOUTHEASTERN TEXTAN, \$40.00
SOUTHEASTERN TEXTAN MAN., \$ 7.50
AUTO REPEAT KEY, \$ 7.50

Both are tape only.
Disk to be released soon

Southeastern Software ✓318
1604-9th Ave. S., Apt. 9B
Birmingham, AL 35205

Atten: Jeff Lyons, DEPT M

SimpleSort—DBM™ TRS-80 SORT UTILITY DATA BASE MANAGEMENT SYSTEM

SimpleSort—A machine code lexicographic sort utility designed for TRSDOS and NEWDOS to efficiently order files created by the BASIC field statement. The DOS statement

SORT ZB:1 = FACT:3,V,A,64,4,10,5-BASIC

will move the 64 byte records (4/sector) with a 10 byte key (offset 5 from beginning) from FACT:3 to ZB:1 in ascending order, verifying all writes, and then invoke BASIC. The destination file can be the source file, there are no intermediate files created, and the source file can fill the entire diskette and still be sorted. Simple, efficient, convenient, extremely fast (with even more features), SimpleSort.

DBM—A menu driven data base management system of BASIC and machine code programs that allow the user to easily, conveniently, and logically perform the following functions

- Dynamically define record formats.
- Dynamically define print formats for defined records.
- Build files using record formats
- List files (with or without print format, bounds, or specific selection).
- Merge files with the same record format.
- Sort files (Using a BASIC invoked command line for SimpleSort).
- Sequentially scan key field and modify any field in records selected.
- Key Selection of record for modification (20,000 record limit, any record in 5 sec).
- SimpleSort—DBM package with manual..... \$149.95
- SimpleSort alone with manual..... \$79.95
- Manual only (applicable to purchase)..... \$25.00

SimpleSort—DBM™

✓413 1300 DELAWARE
LAWRENCE, KANSAS 66044
913-841-2333

Time running out? Get into high gear with machine code.

Life in the Fast Lane

Terry Kepner & Claud M. Grace
P.O. Box 481
Peterborough, NH 03458

Most serious programmers at one time or another have seen the program Life. In an attempt to decrease the processing time many have tried to write their own versions of the game. As a result, two schools of Life have developed.

One school, usually the owners of machines like the TRS-80 and the PET, uses only BASIC, while the other school, usually those people who have access to assembler editors, programs Life with machine code.

Since most newcomers are

purchasing machines with BASIC, they see Life run so slowly that they fail to see the reason for all the interest surrounding the game.

If they see it run in machine code however, they are fascinated. Unfortunately, beginners usually have difficulty understanding what machine code is and what it does.

For those of you who are curi-

ous about Life, but don't want to spend days decoding hex instructions, or don't want to shell out the money for an assembler editor, this article is for you.

Three Versions of Life

There are three program listings with this article. The first listing, in BASIC, takes approximately 2½ minutes to evaluate one generation of Life and to update the video.

Since many of the more interesting features of Life (gliders, blinkers, blocks and guns) take from two to ten generations, or more, to find and observe, you

would need a time-lapse camera and plenty of free time to get any useful results.

The second listing, however, is a hybrid BASIC-assembly code program. And it's fast! Almost a line for line conversion of the BASIC program into assembly code, it can be programmed into the TRS-80 Level II computer without additional software.

The third listing, completely in assembly code, is even faster than the hybrid version. The three programs were written to match one another as closely as possible. Studying the listings gives even the newest programmer insight into assembly code programming and its advantages over BASIC.

Let's start with the hybrid program. Its BASIC segment carries the assembly code instructions used by the assembly program. These instructions are held in the DATA statements. When the command RUN is given, the program READs these statements and POKes the numerical instructions (in decimal) into memory at a specified address.

It then calls this assembly code routine via USR(0) in BASIC.

When the call is made, the computer leaves BASIC, executes the assembly code instructions, and returns to BASIC

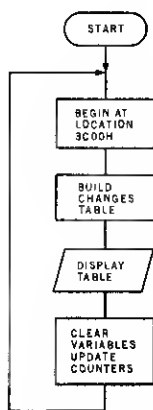


Fig. 1. General Logic

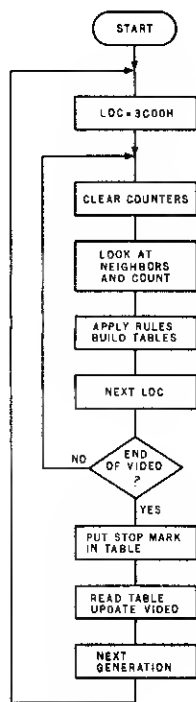


Fig. 2.


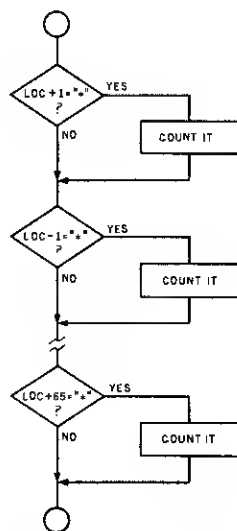



Fig. 3. Look at Neighbors

**ΩMEGA
SALES
CO.**


**"WHOLESALE COMPUTER PRICES"
DIRECT TO THE PUBLIC**
12 Meeting St., Cumberland, R.I. 02864



TRS-80 *
Model II - \$3,500



Apple II
16K - \$1049



Atari 800 - \$749




For: TRS-80, Apple, CBM,
(Interface Included)

Epson TX-80 - \$745



NEC Spinwriter
5510-5530 - \$2449



Soroc 120 - \$699

PRODUCT SPECIAL OF THE MONTH!!



INTERTEC SUPERBRAIN
32K RAM - \$2449.00
64K RAM - \$2649.00

(Prices valid July 15 - Sept. 1, 1980)

Products are
**NOW
IN
STOCK
AT
ΩMEGA
Sales
Co.**

CALL TOLL FREE FOR ΩMEGA'S PRICE!

ΩMEGA OFFERS THE BEST DELIVERY AND PRICE ON:

APPLE • ATARI • TRS-80*MODEL II • INTERTEC •
T.I. 810 • HEWLETT-PACKARD-85 • SOROC •
COMMODORE • NEC • QUME • CENTRONICS

ΩMEGA sells only factory fresh, top quality merchandise to our customers.

ΩMEGA will try to match any current advertised price with similar purchase conditions.

Before you buy anywhere else • be sure to call ΩMEGA Sales Co.

1-401-722-1027 or

ΩMEGA TOLL FREE

✓ 389

1-800-556-7587

ΩMEGA ships via UPS, truck, or air. COD's, VISA, Mastercharge accepted.

"A member in good standing of the better business bureau."



PET[®] TRS 80[®] THE SANYO[®] LEEDEX[®] -GREEN SCREEN

- IMPROVE IMAGE CONTRAST
- REDUCE EYE FATIGUE
- ENHANCE SCREEN LEGIBILITY
- PROVIDE A MORE PLEASING DISPLAY
- GIVE A DISTINCTIVE PROFESSIONAL LOOK TO YOUR SYSTEM

The GREEN SCREEN is custom molded to fit nicely over the picture tube. It ingeniously mounts in seconds without any tools.

CALL: (212) 296-5916
or send \$12.50 + \$2 S&H




ALPHA product co.

85-71, 79th St., Woodhaven, N.Y. 11421

NEW T=BUSS

BUS EXTENDER FOR TRS 80[®]
LIKE HAVING 5 EDGE connectors

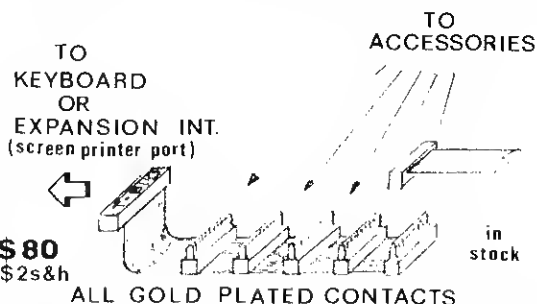

\$80
+\$2s&h

ALL GOLD PLATED CONTACTS

•INTERFACER 2 \$85

16 channel I/O module, 8 inputs, 8 outputs, 2 relays, 2 opto-isolated inputs. Very easy to use with BASIC. Extensive user's manual included. Sold worldwide for over a year.

(212) 296-5916

ALPHA product co.

85-71, 79th St., Woodhaven, N.Y. 11421

```

1 REM LIFE IN THE BASIC LANE
2 REM
3 REM
4 REM
5 REM CLAUD M. GRACE
6 REM 1067 W. MIRACLE MILE #97
7 REM TUCSON, AZ. 85705
8 REM
9 REM
10 REM
90 REM THIS SETS UP A RANDOM PATTERN ON THE SCREEN
100 CLS
105 PRINT@0,"GENERATION 0";
110 FOR X=1 TO 40
120 J=RND(30)+17;K=RND(8)+4
130 PRINT@0,(K*64+J),"*";
140 NEXT X
141 REM THIS LOOKS AT THE SCREEN, EVALUATES THE "*" IT FINDS,
142 REM AND UPDATES THE COUNTERS
145 POP=40
146 REM CALL THE VIDEO SCAN ROUTINE, THEN UPDATE
150 GOSUB 1000
155 GEN=GEN+1:PRINT@0,"GENERATION ";GEN;
170 GOTO 150
910 REM THE PROGRAM SCANS THE VIDEO. WHEN IT FINDS AN
920 REM "*", IT CHECKS THE SURROUNDING 8 SPACES FOR
930 REM LIVE NEIGHBORS AND COUNTS THEM. IT THEN AP-
940 REM PLIES THE RULES OF LIFE, RECORDS THE RESULT AND
950 REM CONTINUES TO THE NEXT VIDEO LOCATION. WHEN ALL
960 REM OF THE VIDEO HAS BEEN SCANNED, THE TABLE IS READ
970 REM AND ALL THE BIRTHS AND DEATHS ARE PUT ON THE
980 REM SCREEN. IT THEN RETURNS TO THE CALLING PRO-
990 REM GRAM LINE FOR COUNTER UPDATES.
995 REM THIS INITIALIZES THE COUNTERS FOR EACH NEW GENERATION
1000 VIDEO=15360
1010 TABLE=29696
1020 IX=TABLE
1030 HL=VIDEO
1035 REM BEGIN SEARCH OF SURROUNDING 8 SPACES FOR NEIGHBORS
1037 REM D= NUMBER OF NEIGHBORS ; A="*"
1040 IX=HL
1050 D=0
1060 A=42
1070 IF A=PEEK(IX+1) THEN GOSUB 2000
1080 IF A=PEEK(IX-1) THEN GOSUB 2000
1090 IF A=PEEK(IX-65) THEN GOSUB 2000
1100 IF A=PEEK(IX-64) THEN GOSUB 2000
1110 IF A=PEEK(IX-63) THEN GOSUB 2000
1120 IF A=PEEK(IX+63) THEN GOSUB 2000
1130 IF A=PEEK(IX+64) THEN GOSUB 2000
1140 IF A=PEEK(IX+65) THEN GOSUB 2000
1145 REM APPLY THE RULES OF LIFE
1150 GOSUB 3000
1155 REM MOVE TO NEXT VIDEO LOCATION
1160 HL=HL+1
1165 REM IS THIS THE LAST VIDEO LOCATION?
1170 IF HL>16384 THEN GOTO 1840
1175 REM IF IT IS, THEN END THE LIST
1180 GOSUB 4000
1185 REM AND PUT THE TABLE RESULTS ON THE VIDEO
1190 GOTO 5000
1195 REM ADD ONE TO NEIGHBOR COUNT AND RETURN TO SEARCH
2000 D=D+1:RETURN
3000 REM RULES OF LIFE
3005 REM 1ST, IS LOCATION A "*" ?
3010 IF A<>PEEK(HL) THEN 3300
3020 A=D
3025 REM 2ND, IF IT FAILS THE NEXT TWO TESTS, THE IT DIES
3030 IF A=2 GOTO 3400
3040 IF A=3 GOTO 3400
3045 REM 3RD, PLACE ITS ADDRESS IN THE TABLE, & CONTINUE
3050 H=INT(HL/256):L=HL-H*256
3060 POKE IX,L
3070 IX=IX+1
3080 POKE IX,H
3090 IX=IX+1
3100 GOTO 3400
3200 REM 2ND, ARE THERE ENOUGH NEIGHBORS FOR A BIRTH?
3300 A=D
3310 IF A<3 THEN GOTO 3400
3315 REM 3RD, PLACE ITS ADDRESS IN THE TABLE
3320 H=INT(HL/256):L=HL-H*256
3330 POKE IX,L
3340 IX=IX+1
3345 REM MAKING H GREATER THAN 128 MEANS A BIRTH
3350 H=H+128
3360 POKE IX,H
3370 IX=IX+1
3400 RETURN
4000 REM STOP -- PLACE END OF LIST MARKER
4010 POKE IX,0
4020 IX=IX+1
4030 POKE IX,0
4040 IX=IX+1
4050 RETURN
4990 REM UPDATE THE VIDEO FROM THE TABLE ROUTINE
5000 IX=TABLE
5005 REM 1ST, RECOVER THE H-L REGISTER ADDRESS FROM THE TABLE
5010 L=PEEK(IX)
5020 IX=IX+1
5030 H=PEEK(IX)
5040 IX=IX+1
5050 A=H
5055 REM 2ND, IS THIS THE END OF THE TABLE?
5060 IF A=0 THEN RETURN
5065 REM 3RD, IS IT A BIRTH?
5070 IF A>128 THEN GOTO 5200
5080 HL=256*H+L
5085 REM 4TH, PLACE A BLANK ON THE VIDEO
5090 POKE HL,32
5100 GOTO 5010
5200 H=H-128
5210 HL=H*256+L
5215 REM 4TH, PLACE AN "*" ON THE VIDEO
5220 POKE HL,42
5230 GOTO 5010

```

Listing 1. BASIC

```

1 REM LIFE IN THE FAST LANE
2 REM
3 REM CLAUD M. GRACE TERRY L. KEPNER
4 REM 1067 W. MIRACLE MILE, # 97 P.O. BOX 481
5 REM TUCSON, ARIZONA 85705 PETERBOROUGH, N.H. 034
58
6 REM
7 REM
8 REM
10 DEFINT Z
20 CLS
30 PRINT" LIFE IN THE FAST LANE "
40 PRINTCHR$(13);PRINTCHR$(13)
50 PRINT" TOUCH SPACE BAR TO START NEW RANDOM PATTERN"
60 PRINTCHR$(13);PRINTCHR$(13)
70 PRINT" 'C' TO CHANGE DELAY BETWEEN GENERATIONS"
80 PRINT:PRINT:PRINT
90 POKE 16526,0:POKE 16527,112:POKE 16553,255:GOSUB350:CLR!00
100 INPUT"DELAY BETWEEN GENERATIONS (APPROX 250/SECOND)"; SP
110 Z=1
115 REM THIS SETS UP RANDOM PATTERN ON SCREEN
120 CLS
130 PRINT@0,STRING$(64," ");
140 FOR X=1 TO 60
150 J=RND(30)+17:K=RND(8)+4
160 PRINT@ (K*64+J),"*";
170 NEXT X
175 REM UPDATE SCREEN AND GENERATION COUNTER
180 Q=USR(0)
190 GEN=GEN+Z:PRINT@0,"GENERATION ";GEN;
195 REM TIME DELAY ROUTINE
200 FOR X=1 TO SP:NEXT X
210 KS=INKEY$:IF KS="" THEN 180
220 IF KS="C" THEN GEN=0:GOTO 100:ELSE GEN=0:CLS:GOTO 140
225 REM MACHINE LANGUAGE SCREEN UPDATE
227 REM EQUIVALENT TO LINES 1000-1060
230 DATA 221,33,0,116,33,0,60,229,253,225,22,0,62,42
235 REM EQUIVALENT TO LINES 1070-1090
240 DATA 253,190,1,204,78,112,253,190,255,204,78,112,253,190,191,
204,78,112
245 REM EQUIVALENT TO LINES 1100-1120
250 DATA 253,190,192,204,78,112,253,190,193,204,78,112,253,190,63,
204,78,112
255 REM EQUIVALENT TO LINES 1130-1150
260 DATA 253,190,64,204,78,112,253,190,65,204,78,112,205,80,112
265 REM EQUIVALENT TO LINES 1160-2000
270 DATA 35,62,64,188,194,7,112,205,129,112,195,142,112,20,201
275 REM EQUIVALENT TO LINES 3000-3040
280 DATA 190,194,108,112,122,254,2,202,128,112,254,3,202,128,112
285 REM EQUIVALENT TO LINES 3050-3310
290 DATA 221,117,0,221,35,221,116,0,221,35,195,128,112,122,254,3,
194,128,112
295 REM EQUIVALENT TO LINES 3320-3400
300 DATA 221,117,0,221,35,221,116,0,221,203,0,254,221,35,201
305 REM EQUIVALENT TO LINES 4000-5010
310 DATA 221,54,0,0,221,35,221,54,0,0,221,35,201,221,33,0,116
315 REM EQUIVALENT TO LINES 5020-5060
320 DATA 221,118,0,221,35,221,102,0,221,35,124,254,0,200
325 REM EQUIVALENT TO LINES 5070-5230
330 DATA 254,128,242,170,112,54,32,195,146,112,203,188,54,42,195,
146,112,300
340 REM THIS POKES THE MACHINE LANGUAGE INSTRUCTIONS INTO MEMORY
350 ADDR=28672
360 READ CODE
370 IF CODE>255 THEN RETURN
380 POKE ADDR,CODE
390 ADDR=ADDR+1:GOTO 360

```

Listing 2. Hybrid BASIC-Assembly Code

to update the generation counter and check for additional user inputs. The process then repeats.

To understand the assembly code routine requires a little background information.

Life Strategy

Originally developed to simulate cell growth, Life's rules are rather simple: In order to survive, each cell must have two or three neighbors, otherwise it dies of "loneliness"; a cell with more than three neighbors dies from overcrowding; any empty space with exactly three neighbors will be the site of a "birth" and will be occupied by a new cell.

The interest and fun in Life comes from watching cells develop into interesting patterns,

or, perhaps, even new Life forms.

There are several ways to program Life. One method uses two two-dimensional arrays—one for the current generation under evaluation, and the other for the survivors and births of that generation. Another method uses only one array, with the current cells positive but less than 128, births greater than 128 and deaths negative.

The strategy used in this article follows neither of the above two methods.

Since each generation is different from the previous one by some set of changes, all that is needed is a list of these changes—the births and deaths of each generation (see Fig. 1).

This list is built by looking at the eight surrounding spaces of

NOW YOU ARE A PART OF THE GREATEST STORIES EVER CREATED!



INTERACTIVE FICTION™

What Is It?

Interactive Fiction is story-telling using a computer, so that you, the reader, can actually take part in the story instead of merely reading it.

How does it work?

The computer sets the scene with a fictional situation, which you read from the CRT. Then, you become a character in the story: when it's your turn to speak you type in your response.

The dialogue of the other characters and even the plot will depend on what you say.

Is it a game?

No. In a game the situation is rigidly defined and you can select from only a limited number of responses. But in Interactive Fiction you can say anything you like to the other characters. (Of course if your response is too bizarre they may not understand you!)

What Is available now?

Robert Lafore, writer, columnist, and programmer, has created a series of works in Interactive Fiction. Each is available on a 5 1/4" diskette for use on a TRS-80* Level-II with at least 32K memory and one disk drive. Requires user to have a copy of TRSDOS 2.2 or 2.3.

Six Micro Stories offers a good introduction to Interactive Fiction. Six very short stories involve you, the reader, in a variety of situations: you are an American spy in Hitler's Third Reich, the pilot of a doomed 747, and more.

Local Call for Death is a detective story in the style of Lord Peter Wimsey. Considerably more challenging than the above program, this one will put your analytic skills (and social savoir-faire) to the test.

Two Heads of the Coin is a psychological mystery set in the London of Sherlock Holmes. Most challenging of all, this program will tax your observational skills and above all your imagination.

Please send me the following works of Interactive Fiction.

Six Micro-Stories	\$14.95	"Also available worldwide through your local adventure dealers"
Local Call for Death	\$19.95	
Two Heads of the Coin	\$19.95	

(Florida residents add 4% sales tax.)

Name _____

Address _____

City, State, Zip _____

TO ORDER: Mail the above form with your payment to: **Adventure International, P.O. Box 3435, Longwood, FL 32750.**

☐ MasterCard ☐ Visa ☐ Check ☐ C.O.D.

M.C. or Visa Number: _____

Signature _____

*TRS-80 is a trademark of the Tandy Corporation.

adventure international



each location on the video screen and counting the number of live cells (actually asterisks). This count is compared to the rules, and if the rules decree death, then the address of that cell is added to the list.

If the rules decree birth, the address of that cell has 8000 hex added to it and is placed on the list. For any other conditions, nothing is added to the list. After the last video position is considered, the address 0000 hex is added to the list as an end marker. This is demonstrated in Fig. 2.

The process involved in checking out the surrounding eight spaces of each video location is shown in Fig. 3.

Fig. 4 is the heart of the strategy. It applies two different rules, depending upon whether

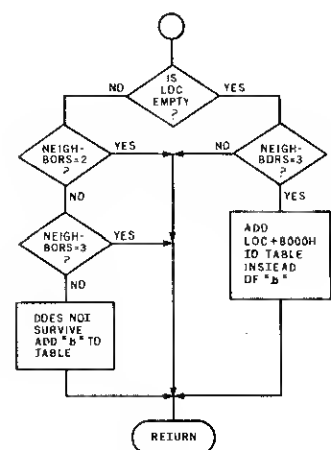


Fig. 4. Apply Rules & Build Table

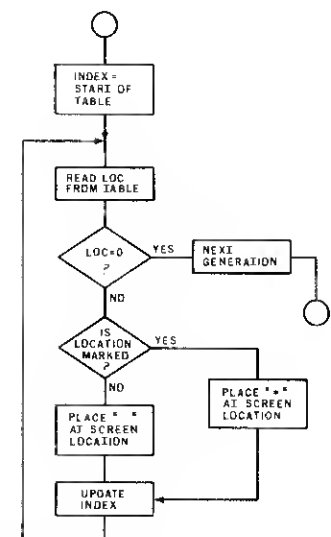


Fig. 5. Read Table & Update Display

a video location is occupied or empty. For an empty space, if the neighbor count is not two or three, add that location's address to the list. This is its death warrant.

The address must be broken down into two hex numbers for the machine code routine to handle it, one for the last two digits (which are also in hex), and one for the first two digits (0080H = 80H + 00H).

For an empty cell, if it has exactly three neighbors, set the seventh bit of the most signifi-

cant byte (the first two hex digits are known as the MSB and the last two as the LSB—least significant byte) of its address high. Add the address to the list. This is equivalent to adding 128 decimal to the address and is used to signify a birth. If none of these conditions are met, forget this location and go to the next one.

Fig. 5 reads the addresses off the table until it finds a zero. It also checks to see if each address is greater than 8000H, and, if it is, resets the MSB bit low

and sends a * to the resultant address. If it is lower than 8000H it sends a " " to that address.

As I mentioned earlier, the difference between the execution times of the BASIC and the hybrid versions is fantastic. One generation of Life in the hybrid version has approximately 3½ to four generations per second! This is a ratio of almost 550 to one.

At this high speed it was necessary to add a timing loop to the program to slow down the

```

00001 ;*****
00002 ;***** LIFE SOURCE CODE
00003 ;***** CREATED BY CLAUD M. GRACE
00004 ;
00005 ;*****
00006 ORG 7000H
00007 VIDEO EQU 3C00H ;STARTING ADDRESS
00008 TABLE EQU 7400H ;STARTING ADDRESS
00009 BUILD LD IX, TABLE ;LOAD TABLE ADDRESS INTO IX
00010 LD HL, VIDEO ;LOAD VIDEO ADDRESS INTO H & L
00011 LDOP PUSH HL ;PUSH HL ONTO STACK
00012 POP IY ;POP STACK (HL) INTO IY
00013 LD D, 0 ;LOAD 0 INTO REGISTER D
00014 LD A, 42 ;LOAD 42 INTO ACC. A
00015 CP (IY+1) ;COMPARE ACC. A WITH IY+1
00016 CALL Z, COUNT ;IF ZERO, CALL COUNT
00017 CP (IY-1) ;REPEAT ABOVE TWO STEPS
00018 CALL Z, COUNT
00019 CP (IY-65)
00020 CALL Z, COUNT
00021 CP (IY-64)
00022 CALL Z, COUNT
00023 CP (IY-63)
00024 CALL Z, COUNT
00025 CP (IY-62)
00026 CALL Z, COUNT
00027 CP (IY-61)
00028 CALL Z, COUNT
00029 CP (IY-60)
00030 CALL Z, COUNT
00031 CALL RULES ;NOW LOOK AT RULES
00032 INC HL ;GO TO NEXT VIDEO LOC.
00033 LD A, 40H ;LOAD 40HEX INTO A
00034 CP H ;COMPARE TO H REGISTER
00035 JP NZ, LOOP ;IF NOT ZERO, GO TO LOOP
00036 STOP ;IF ZERO, END OF VIDEO
00037 JP READ ;JUMP TO READ
00038 COUNT INC D ;ADD 1 TO REGISTER D
00039 RET
00040 RULES CP (HL) ;COMPARE A TO CONTENTS OF ADDRESS IN HL
00041 JP NC, MTY ;IF ITS EMPTY, JUMP TO MTY
00042 LD A, D ;LOAD CONTENTS OF REG. D INTO A
00043 CP 2 ;DOES IT = 2 ?
00044 JP Z, GO ;YES, JUMP TO GO
00045 CP 3 ;DOES IT = 3 ?
00046 JP Z, GO
00047 LD (IX+0), L ;LOAD ADDRESS IN REG. H & L
00048 INC IX ;INTO ADDRESSES POINTED
00049 LD (IX+0), H ;TO BY REG. IX
00050 INC IX
00051 JP GO
00052 MTY LD A, D ;LOAD REG. D INTO A
00053 CP 3 ;COMPARE WITH THE # 3
00054 JP NZ, GO ;IF NOT ZERO, JUMP TO GO
00055 LD (IX+0), L ;STORE ADDRESSES IN H & L
00056 INC IX ;IN ADDRESSES POINTED TO
00057 LD (IX+0), H ;BY THE IX REGISTER
00058 SET 7, (IX+0) ;SET BIT 7 TO A 1 (BIRTH)
00059 INC IX
00060 GO RET ;RETURN TO LDOP CALLS
00061 STOP LD (IX+0), 0 ;LOAD ZERO'S INTO ADDRESSES
00062 INC IX ;POINTED TO BY IX, END OF
00063 LD (IX+0), 0 ;TABLE
00064 INC IX
00065 RET
00066 CELL EQU 42 ;CELL = "*"
00067 BLANK EQU 32 ;BLANK = " "
00068 READ LD IX, TABLE ;LOAD TABLE ADDRESS INTO IX
00069 LD L, (IX+0) ;LOAD CONTENTS OF ADDRESS IN
00070 INC IX ;IX INTO H & L, RESPECTIVELY
00071 LD H, (IX+0)
00072 INC IX
00073 LD A, H
00074 CP 0 ;IS THIS END OF TABLE?
00075 RET Z
00076 CP 128 ;IS IT A BIRTH?
00077 JP P, MT ;IF PARITY FLAG IS SET, JUMP TO MT
00078 LD (HL), BLANK ;LOAD " " INTO ADDRESS IN HL
00079 JP LOOP1
00080 MT RES 7, H ;RESTORE THE 7TH BIT OF H
00081 LD (HL), CELL ;LOAD "*" INTO ADDRESS IN HL
00082 JP LOOP1
00083 END

```

Listing 3. Assembly Code

game. The loop is set at the beginning of the game by asking the operator what time delay is wanted.

Assembly Version

The assembly language version is only a little bit faster than the hybrid version, running about five to six generations per second.

Unfortunately there isn't a method for the user to input his or her own patterns onto the screen in these programs. It's discouraging to spend five to ten minutes putting a pattern on screen, only to see everything either die off or become static in five or ten seconds. Inserting a random pattern generator corrects this and the patterns usually last longer than ten seconds too!

Since most of the heavy-duty work is accomplished in the assembly code section of the program, it should be easy for you to write your own method of pattern entry. A pause key can also be added to allow you time to

study the screen if an interesting Life form appears.

Be careful when adding statements to the BASIC portion of the hybrid program. The assembly code routine resides at the top of the memory, while the BASIC program occupies the lower part.

As long as the two do not overlap there aren't any problems, but when the BASIC section intrudes upon the assembly code routines, the program as a whole will malfunction and crash.

To avoid this catastrophe, find out the lowest address of RAM used by the assembly code routine, not counting the video memory cells. After power up, when MEMORY SIZE? prompts, input this address in decimal. (For this particular program the lowest address used by the assembly code routine is 28672.)

The sample programs have been liberally sprinkled with comments to help you understand assembly code and how it corresponds to BASIC. ■

ADVANCED BUSINESS SOFTWARE FOR THE TRS-80

(Now Available For Model II Also)

* FORECASTING * RISK ANALYSIS * U.S. MACRO MODEL

If you're serious about improving your business with a computer, why not use the best business planning software available? Dr. David M. Chereb has made the most powerful and successful business analytical techniques available to micro computer users.

All programs listed below are in Basic, for 32K (or more) disk based TRS-80 systems.

BUSINESS PLANNING PACKAGE for FORECASTING - An integrated set of forecasting programs to handle a variety of business forecasting needs from Trend Analysis to Advanced Multiple Regression (100 pg. User Manual) \$99.

INVESTMENT RISK ANALYSIS - The major ingredient in any investment is uncertainty. This program accounts for cost changes, shifting revenue streams and interest rate fluctuations. Now you can manage risk. (35 pg. User Manual) \$99.


U.S. SIMULATION MODEL - Knowing where the economy is going and how it reacts to government fiscal and monetary actions can save you a lot of money. This is a user oriented economic situation model constructed to professional standards (50 pg. User Manual) \$199.

NOTICE TO CUSTOMERS:

Because of the tremendous increase in recent orders, our shipping response time has slowed. We are expanding in order to correct this situation. But for the next month our shipping date will average one week after receipt of your order.

To order CALL 213/424-3652, or write to APPLIED ECONOMIC ANALYSIS, 4005 Locust Ave., Long Beach, CA 90807.

E · X · P · A · N · D

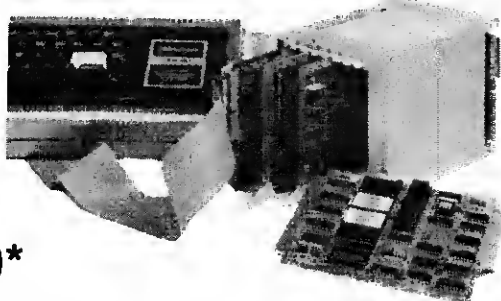


YOUR TRS-80*

INTRODUCING THE XTD-TRS INTERFACE CARD FOR THE STD BUS

This card permits direct connection between the TRS-80* and the STD BUS system. The TRS-80* can even be used as a development system for Z-80 STD BUS. QC MicroSystems distributes a full line of STD BUS products from a number of manufacturers including Mostek, Xitex, Intelligence Systems and Spurrier.

Xitex XTD-TRS Interface Card



DDT-80 ROM

\$260 Includes: DDT-80 ROM

OFF THE SHELF STD BUS PRODUCTS

AVAILABLE NOW:

MDX-CPU1	\$260	Z80 CPU/RAM/PROM
MDX-CPU2	\$295	Z80 CPU/RAM/PROM
MDX-DRAM 8/32		Dynamic RAM
MDX-PIO	\$250	Parallel I/O
MDX-A/D 8,10,12		A/D Converter
MDX-DA 8,12		D/A Converter
SYS-CPM*		CP/M 2.2 Disk S.W.
MDX-MATH	\$699	Floating Point Math
MDX-SIO	\$260	Serial I/O
MDX-SV1-1	\$235	Video Interface
PROM-I	\$165	PROM Programmer
MDX-EPROM/UART	\$225	Combination PROM/UART
CARD CAGES		8-22 Slot with MotherBoard
POWER SUPPLY	\$135	

*Contact QC for Pricing Options

200 NS MEMORY!!

High speed 4116 RAMs for Maximum Reliability from your TRS-80*.

SET OF 8 FOR \$57

OTHER RAMS		\$(1-9)
2114 UCB 1K x 4	450 NS	5.00
4118N-4 1K x 8	250 NS	24.00
4104N-4 4K x 1	250 NS	10.50

PROMS		
2716T-12 2K x 8	650 NS	24.50
2716T-8 2K x 8	450 NS	27.00

Z80 PARTS	2.5 MHZ	4.0 MHZ
	\$(1-9)	\$(1-9)
Z80-CPU	11.00	15.00
Z80-PIO	8.50	11.00
Z80-CTC	8.50	11.00
Z80-DMA	29.00	37.00
Z80-SIO	37.50	45.00

MISC.		
12" Video Monitor B&W		\$149.00

Micro Computer Systems, Components and Service

MasterCharge, Visa, American Express, Check, C.O.D. accepted. Add \$3.00 for U.S. Shipping & Handling. Allow two weeks for shipment. Min. order of \$10.00. All products covered by a 90 day OEM warranty. Prices subject to change without notice.



Dealer Inquiries Welcome!

Micro Systems P.O. BOX 401326
GARLAND, TEXAS 75040
(214) 343-1282

Ask for our complete catalogue!

Learn about matrix handling, and destroy submarines at the same time.

U-Boat

Hubert C. Borrmann
2840 South Circle Dr.
Colorado Springs, CO 80906

Simplicity is the key to program writing for the begin-

ner. Try starting with something easy, like a guessing game and then improve it.

In the following program, the computer thinks of a number, while you try to guess it. The

computer then tells you how close you are.

By adding some graphic embellishments to this premise, we have a game that I call U-boat. The U-boat is hidden, and the

player has to guess where it is.

This idea can be developed in several ways. We can divide the ocean into squares and hide the U-boat in one of them. If the player guesses the wrong square, the computer tells him whether he is high or low. By varying the number of squares, the player can change the difficulty.

Using the Game Coordinates

But this approach is a little too simple. Instead, let's use coordinates, a set of numbers used to specify the location of a point on a grid. Coordinates are pairs of numbers, one representing the steps away from our starting point horizontally and the other representing a number of vertical steps down from the horizontal axis.

The set instruction uses this approach. The top-left corner of the screen is 0,0. If you instruct SET(10,1), you go ten steps to the right and one step down.

So far, the player must guess two numbers. But a U-boat isn't a surface craft, and you can't expect the sub to remain on the surface. So I'm going to add the third dimension of depth.

While I'm at it, I'm going to make a change in the language of the rules. Instead of merely guessing some numbers, the player is going to be dropping depth charges.

To give the player some help and guide him toward his prey, I'm going to let the on-board sonar indicate the relative direction of the U-boat from the location of the depth charge drop. The computer will show with arrows whether to increase (right)

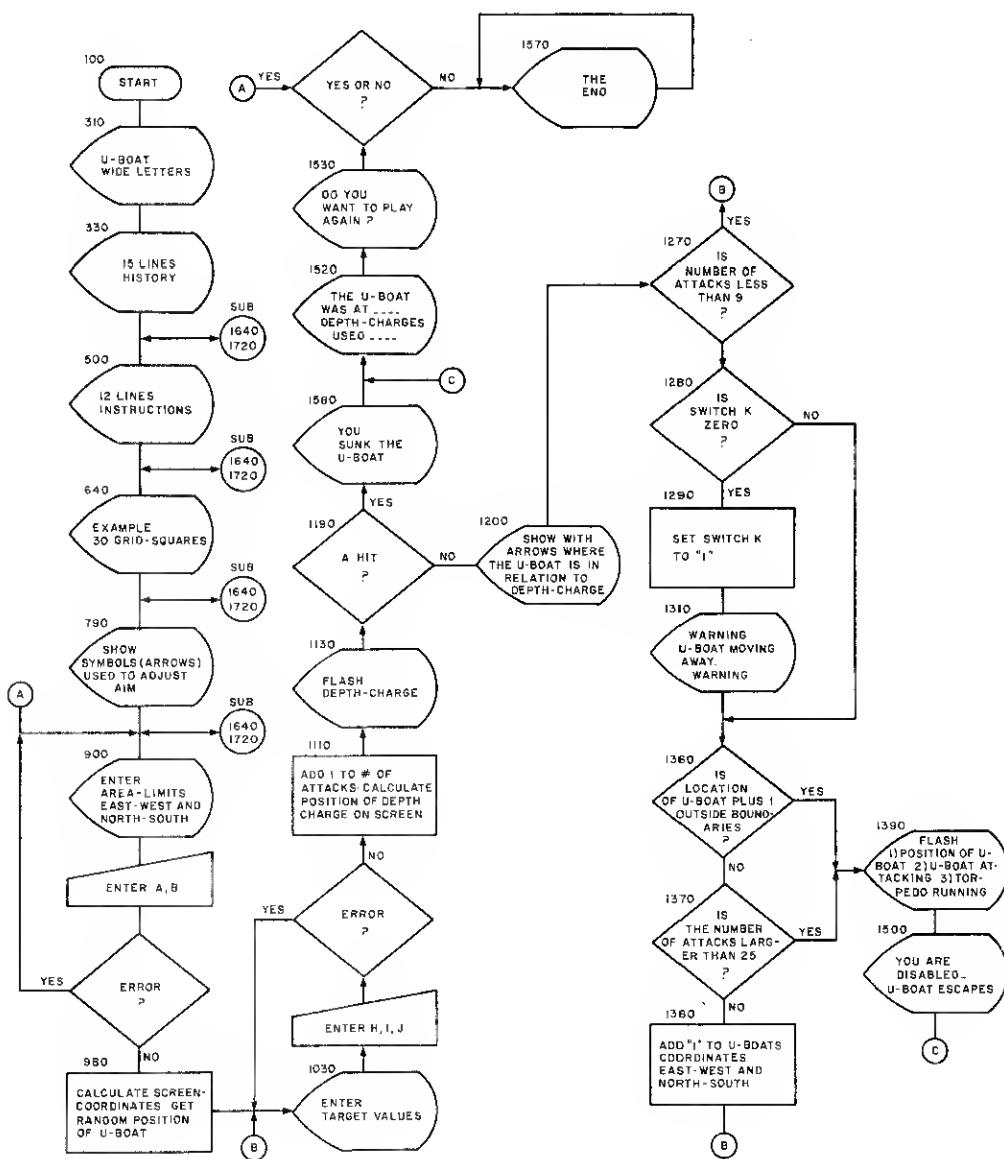


Fig. 1. Flowchart.

or decrease (left) the east-west coordinate and, also, whether to increase (down) or decrease (up) the north-south coordinate.

The computer also verbally advises the player whether to increase the depth setting on his next drop (DOWN) or whether to decrease it (UP).

The computer therefore asks for three coordinates (east-west, north-south and depth) and accepts these values. It then compares these values with the values the player has picked for the location of the imaginary U-boat. If they match, the player has successfully attacked and destroyed a sub (i.e., guessed three numbers correctly).

Varying the Grid

Except for the screen usage, this is still a simple guessing game. You can vary the degree of difficulty by varying the size of the grid.

The set and reset instructions can use 128 horizontal positions and 48 vertical positions. Thus, the largest grid can be 5,969 squares, while the smallest is one by one, or one square. To keep it simple, let's say that the U-boat remains at a depth between 1 and 15, and that the player can't change this range.

After the player enters his guess, the computer responds by flashing the location of the depth charge on the screen and by indicating the necessary corrections required. We don't want an unending game, so after nine unsuccessful attacks let's change the strategy and move the U-boat one step horizontally and one step vertically. This will add some spice.

The player continues attacking (up to 25 times) or until the U-boat is reaching the border of our ocean. If the target has not been found by now, the computer wins. It indicates whether the player has won or lost, shows the position of the U-boat and the number of depth-charges used. The player can now choose to either play another game or to END.

The Flowchart

You still are not ready to write instructions. The flowchart comes first. A flowchart is like a

road map, and if you follow this map faithfully, you won't get lost.

I don't know how much memory you have—I assume 16K. If you have 4K, you can still write the suggested program and leave out part 1 and the remarks.

Break your program down into two parts. Part 1 is just information, while part 2 is the actual game. Part 1 offers some history, some instructions of how to play the game, and an example.

Fig. 1 is the main chart. Fig. 2 is a set of instructions which have to be repeated several times. It's a delay subroutine that flashes the word SPACE, while the player is waiting. SPACE continues flashing until INKEY\$ detects a keystroke. It is numbered higher than the body of the program, so that it is callable. (See Radio Shack's July, 1979, Newsletter.)

After a start symbol and a title frame, the next screen symbol indicates 15 lines of history. It is actually not 15 lines, since I reserve the top line for the heading U-boat on all frames, and I also reserve the last line to tell the player to press the space bar when he is ready. This instruction delay is provided by our subroutine.

There follows some instructions to the player, the subroutine, and two screens that illustrate the grid, symbols, and language the computer will use.

Again, I use the delay subroutine.

The Game

I now start part 2, the actual

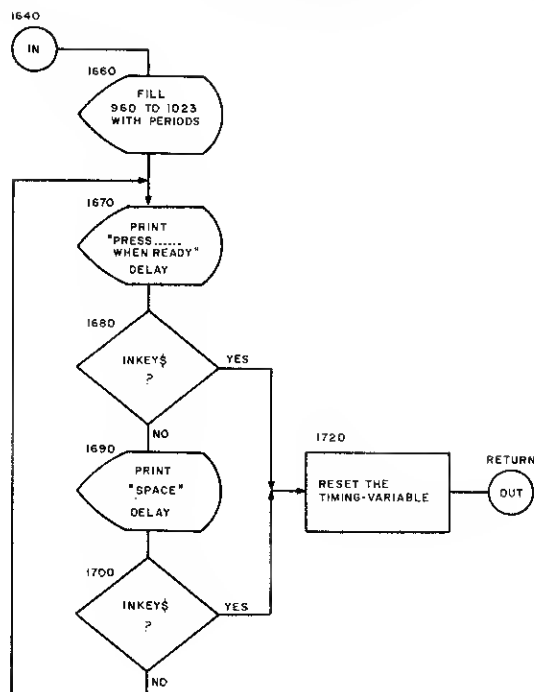


Fig. 2. Subroutine.

game. The circle with the letter A in it is a connector, and is used so that the logic lines do not have to cross each other. A starts with a query to enter the ocean limits.

The next symbol, a keyboard, indicates data entry. I accept the numbers for the limits, and write into the symbol the letters A and B. These are variables.

A good programmer will check entered data for validity, and I do this in the next symbol, the diamond. I check for a number between 1 and 127, and for the other number between 1 and 47. If there was an error, I go back to connector A.

If the entered limits are OK, I

now have some work to do. The square box indicates my calculations. I first adjust the width and length of the screen to the desired ocean area. If the player chooses the east-west limit to be 64, for instance, this becomes the extreme right number of the screen. Position 32 is in the middle and so forth.

I let the TRS-80 pick the three coordinates of our imaginary U-boat: east-west, north-south and depth.

At connector B I ask for the three target coordinates, and the player makes his first guess. The keyboard symbol accepts the three values, variables H, I and J and these are edited in the next diamond. They have to fit into the pre-determined area. If the data are OK, I increment the attack counter.

The location of the depth-charge shows on the screen, flashing on and off (SET and RESET).

The next diamond determines whether we scored a hit or a miss. The U-boat is sunk if hit and that is indicated. The next symbol shows where the U-boat was on the screen, its coordinates, and the number of depth charges expended.

The game is over, and the computer asks whether another


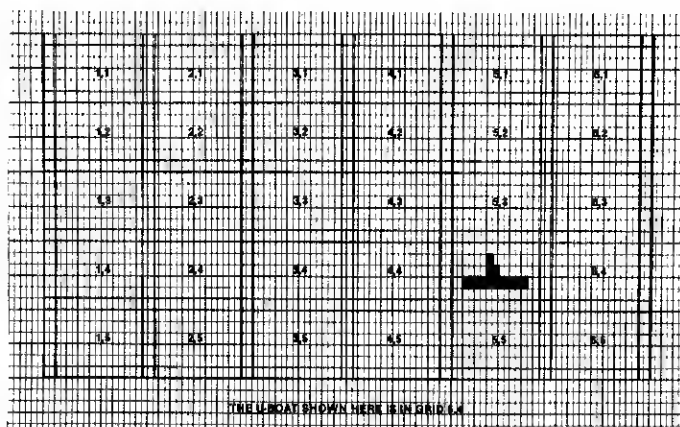


Fig. 3. Sample U-boat Grid.

"MACHINE
LANGUAGE
& SOUND EFFECTS"

INVADERS FROM SPACE

by Carl Miller

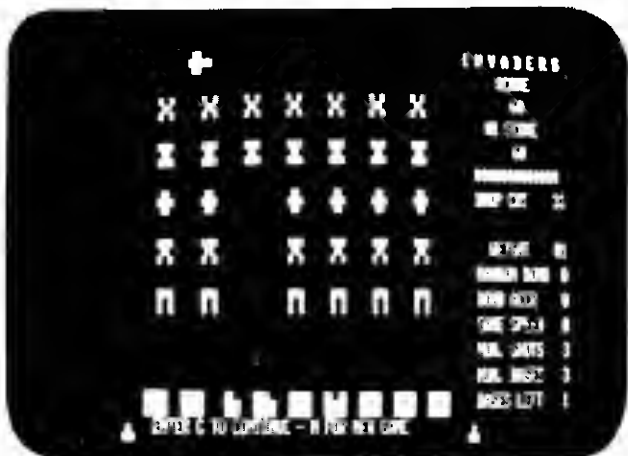

A NEW ATTACK IS LAUNCHED

Just when it seemed to be all over, Acorn introduces a new and faster machine language version of this classic space game. In the game, the aliens are dropping bombs, moving from side to side, and trying to overrun your bases. You try to hold them off by shooting at them and scoring with each hit.

In *INVADERS FROM SPACE* you choose the game speed, the enemy bomb frequency and accuracy, the number of shots on the screen, and the number of your bases. These choices produce a weight scoring factor, and make it fun for all ages.

Move your base and fire at the invaders--both at the same time--which you can not do in most similar games. Full sound effects add excitement to the incredible speed and action of *INVADERS FROM SPACE*.

Acorn produces many game programs for the TRS-80*. These include *PIGSKIN*, the one-or-two player football strategy game; *PINBALL* a graphic arcade game; and *GAMMON CHALLENGER*, the popular backgammon program. Each is available at only \$14.95 on tape and \$20.95 on disk for a 16K Level II TRS-80*. Ask for these and other quality programs at your local computer store.

TRS-80 is a trademark of Tandy Corp.



DEALER INQUIRIES INVITED

Acorn
Software Products, Inc.

634 North Carolina Avenue, S.E., Washington, D.C. 20003

Program Listing.

```

120 ' THE FOLLOWING IS A LIST OF THE VARIABLES USED :
130 ' A = EAST-WEST LIMIT OF AREA
140 ' B = NORTH-SOUTH LIMIT OF AREA
150 ' C = 127/EAST-WEST LIMIT
160 ' D = 47/NORTH-SOUTH LIMIT
170 ' E = EAST-WEST COORDINATE OF U-BOAT
180 ' F = NORTH-SOUTH COORDINATE OF U-BOAT
190 ' G = DEPTH OF U-BOAT (1-15)
200 ' H = EAST-WEST COORDINATE OF DEPTH-CHARGE
210 ' I = NORTH-SOUTH COORDINATE OF DEPTH-CHARGE
220 ' J = DEPTH-SETTING OF DEPTH-CHARGE
230 ' K = SWITCH, 1ST TIME IS ZERO
240 ' L, M, O, P = WORK VARIABLES
250 ' N = ATTACK COUNTER, CHGE STRATEGY AT 25.
260 ' T = FOR TIMING LOOPS
270 ' X = HORIZONTAL SCREEN COORDINATE
280 ' Y = VERTICAL SCREEN COORDINATE
290 ' SS AND SS$ ARE USED IN THE SUBROUTINE.
300 '
310 CLS: CLEAR250: PRINT CHR$(23): PRINT@398, "U - B O
    A T"
320 FOR T=1 TO 700: NEXT T: CLS
330 PRINT@20, "U - B O A T";
340 PRINT@64, "THERE WERE TIMES DURING THE WORLD WARS, W
    HEN THIS WORD CAUSED"
350 PRINT "TERROR AMONG THE SEAMEN OF THE ALLIES. IT WAS
    DURING THE BATTLE"
360 PRINT "OF THE ATLANTIC IN W.W.2 THAT THE U-BOATS WER
    E FINALLY DEFEA-"
370 PRINT "TED BY HUNTER-KILLER GROUPS, AIRCRAFT AND IMP
    ROVED SONAR AND"
380 PRINT "RADAR DEVICES. THE HUNTER-KILLER TEAMS CONSIS
    TED OF SMALL AIR-"
390 PRINT "CRAFT CARRIERS, DESTROYERS AND/OR CORVETTES.
    ONCE A U-BOAT'S"
400 PRINT "POSITION WAS ESTIMATED, IT OFTEN DID NOT TAKE
    LONG FOR THE HUN-"
410 PRINT "TER OF THE TEAM TO PINPOINT THE POSITION OF T
    HE U-BOAT FOR THE"
420 PRINT "KILLER PARTNER. THE U-BOATS TRIED TO HIDE UND
    ER DIFFERENT DEN-"
430 PRINT "SITY LAYERS OF THE SEAWATER, WHICH DEFLECTED
    THE SONAR IMPUL-"
440 PRINT "SES AND BY REMAINING IMMOBILE AND SILENT. THE
    LACK OF OXYGEN"
450 PRINT "AND EXCESS OF CO-2 HOWEVER FORCED THE U-BOAT
    TO EVENTUALLY"
460 PRINT "SURFACE AND SOMETIMES TO COUNTERATTACK TO SAV
    E ITSELF."
470 GOSUB 1640
480 CLS
490 PRINT@20, "U - B O A T";
500 PRINT@70, "THIS IS HOW WE PLAY THIS GAME : "
510 PRINT "YOU ARE THE CAPTAIN OF A HUNTER-KILLER DESTRO
    YER UNDER ORDERS"
520 PRINT "TO PATROL A CERTAIN AREA OF THE OCEAN. THE AR
    EA IS DIVIDED"
530 PRINT "INTO GRID-SQUARES. (YOU DECIDE THE NUMBER)"
540 PRINT "THE EAST-WEST LIMIT MAY BE BETWEEN 1 AND 127
    "
550 PRINT@395, "AND NORTH-SOUTH BETWEEN 1 AND 47 "
560 PRINT "IF THE E-W LIMIT IS 4 AND THE N-S LIMIT IS 3
    THEN THERE ARE 12"
570 PRINT "SQUARES TO SEARCH. THE U-BOAT COULD BE IN ANY
    OF THESE AT A"
580 PRINT "DEPTH BETWEEN 1 AND 15 (EACH UNIT = 20 METERS
    )."
590 PRINT "IF YOU DROP A DEPTH-CHARGE PATTERN INTO THE R
    IGH SQUARE SET"
600 PRINT "FOR THE RIGHT DEPTH, YOU HAVE DESTROYED THE U
    -BOAT."
610 PRINT@832, "THE FOLLOWING SCREEN WILL SHOW A GRID P
    ATTERN 6 X 5 "
620 GOSUB 1640
630 CLS
640 PRINT@195, "1,1      2,1      3,1      4,1
    5,1      6,1";
650 PRINT@323, "1,2      2,2      3,2      4,2
    5,2      6,2";
660 PRINT@451, "1,3      2,3      3,3      4,3
    5,3      6,3";
670 PRINT@579, "1,4      2,4      3,4      4,4
    5,4      6,4";
680 PRINT@707, "1,5      2,5      3,5      4,5
    5,5      6,5";
690 FOR L=0 TO 121
700 SET(L,7): SET(L,13): SET(L,19): SET(L,25): SET(L,31): SE
    T(L,37): NEXT L
710 FOR L=7 TO 37
720 SET(0,L): SET(20,L): SET(40,L): SET(60,L): SET(80,L): SE
    T(100,L): SET(120,L)
730 SET(1,L): SET(21,L): SET(41,L): SET(61,L): SET(81,L): SE
    T(101,L): SET(121,L): NEXT L
740 FOR L=83 TO 98: SET(L,29): NEXT L: SET(90,27): SET(90,2
    8): SET(91,28)
750 PRINT@844, "THE U-BOAT SHOWN HERE IS IN GRID 5,4.";
760 GOSUB 1640
770 CLS
780 PRINT@20, "U - B O A T";
790 PRINT@64, "THE SCREEN WILL SHOW THE DEPTH-CHARGE PAT
    
```

game is desired. If the answer is yes, then the computer goes to the start of part 1, via connector A. If the answer is no it shows THE END and stays in an unending loop.

You Miss

That was if the player scored. If he missed, we calculate the direction of the U-boat in relation to the depth-charge and indicate with arrows and/or the words UP or DOWN how the player should adjust his aim.

The next diamond asks if this is attack nine or higher. If it was not, the player makes another run, via B. Otherwise the U-boat moves a little at a time. To be fair, the computer informs the player.

Since I want to give this warning only once, I employ a switch K, which is zero the first time and one from then on. If the switch is zero, I make it one and show the warning message.

Before the computer can move the U-boat, however, it has to check that the new location is not outside the ocean area. If the location is valid, the computer next checks if this is the 26th unsuccessful attack. If not, the computer now moves the U-boat by adding one to its coordinates. This moves it one step to the right and one step down.

Then the computer, via connector B, lets the player make another run.

If the earlier check has indicated that the U-boat would move outside the limits, or that the player has performed more than 25 unsuccessful attacks, the computer gives the U-boat captain a break. As you see on the flowchart, the position of the U-boat is flashed on the screen, and "U-boat attacking" and "Torpedo running." It then informs the player that he is disabled and that the U-boat has escaped. Via connector C the screen shows the statistics.

Coding the Game

When starting the actual program coding, I use the program pad and the screen layout forms, and also some scratch paper. On a separate sheet marked variables, I write those used and their meaning. I enter

the list of variables in the program as REMARK statements after I'm done.

If X-programs later, you want to make some improvements in this program, the list of variables will be invaluable. So leave plenty of space for this, and start with line number 100 or so for the Program Listing.

Line 310 sets the screen up for wide letters, CHR\$(23), and prints U-boat. CLS sets the screen to normal width and builds the history screen, lines 330-460.

Line 470 links to the subroutine, 1640. (Before renumbering, this was 10,000.) After CLS and the instructions, lines 490-610 are printed and linked to the subroutine in line 620.

For an example, let's use a grid with six squares across the five squares down. This is a total ocean area of 30 squares (Fig. 4). Name these squares (1,1), (1,2), (1,3) and so on. (See lines 640-680.) Build the framework for these squares with FOR-NEXT loops in lines 690-730, using SET instructions. Add a U-boat in one of the squares, say 5,4, and so state in line 750. Draw the U-boat in line 740.

Line 760 links to the subroutine again. Now, you are ready to print your last informational frame, lines 790-880. Use arrows; see CHR\$ 91, 92, 93, 94.

Part Two

First, set up the area and ask for the limits. Edit the entered values in lines 920 and 950. Note that line 930 contains a RANDOM statement, so that the built-in random number generator will not come up with the same number consecutively.

Now enter A for east-west, B for north-south. In line 970, tell the player how many squares he has to search. This number is L.

Calculating the screen coordinates is simple, if the player has chosen the full screen grid. Any entered east-west number corresponds directly to the screen positions.

However, if the player chooses an east-west limit of 64, then any entered east-west number occupies two logical screen positions. The same is true for the north-south coor-

DOSPLUS 3.0

IF YOU'RE TIRED OF:

- * Consistent Disk I/O Errors
- * Ruined Disks
- * "Silent Death" Hangups
- * Library Commands That Don't Work

YOU'RE READY FOR DOSPLUS!

Faster And More Efficient Than:

- * TRSDOS
- * NEWDOS +
- * VTOS

DOSPLUS Uses less memory and still offers all the commands of the other major operating systems. AND some innovative and useful features of our own design.

DOSPLUS is now available for the TMS-80* Model I, II, and III

LIBRARY OF COMMANDS:

APPEND	ATTRIB	AUTO	BASIC2	BOOT
BUILD	CLEAR	CLOCK	COPY	CREATE
DATE	DEBUG	DEVICE	DIA	DO
DUMP	FREE	KILL	UB	UST
LOAD	PAUSE	PAOT	RENAME	RS232
TIME	TRACE	VERIFY		

BUILT-IN FEATURES:

AUTOMATIC LOWER CASE
SCREEN PRINTER
KEYBOARD DEBOUNCE

UTILITIES:

COPY 1	TRANSFER	RESTORE (DEAD FILES)
PURGE	DISK DUMP/CMD	CLEARFILE
FORMS	REPEATING KEYBOARD	FORMAT BACKUP

Please Contact:

Micro Systems Software Inc. INCORPORATED
5846 Funston Street
Hollywood, Florida 33023
1 (305) 983-3390

Coming Soon: Dosplus 4.0 for 10 - Megabyte TMS-80s*

*TMS-80 is a trademark of Tandy Corp.

Stop fiddling with your cassette cables! Install our TBEEP and forget it forever!

TBEEP™ 1

For Level II and Disk Users — A self-contained audio alert beeper with a pager-like tone. Plugs in-line with "AUX" cable from your TRS-80 (Requires 9V Battery).



\$ 19.95

TBEEP™ 2

A TBEEP kit you install inside your TRS-80 keyboard.



- Completely assembled and tested.
- Attach to keyboard's PC board with double-sided foam tape (included) and solder three wires to easily located points on keyboard unit. Installs in minutes.
- Uses power from your TRS-80. No battery required.
- DEALERS! Install when modifying your customer's TRS-80, and include TBEEP's simple four word BASIC command in your off the shelf Software.

TBEEP 2 Kit (with complete instructions) \$ 12.95

Send Check or Money Order to:
Phone Orders:


WEB ASSOCIATES ✓ 27
New Mail Order Address
P.O. Box 96QH
Corona Del Mar CA 92625 92625
(Calif. Residents add 6% tax)



(714) 494-2869
Dealer Inquiries Invited
UPS/COD — Add \$3.00

SEND FOR FULL LINE CATALOG

Internal Expansion Board



Features:

- SERIAL PRINTER PORT
- HIGH-SPEED TAPE SYSTEM
- 32K MEMORY
- KEYBOARD DEBOUNCE
- MOUNTS IN KEYBOARD
- HIGH GRADE PCB
- DOCUMENTATION

price **\$49.95**

Add \$4. for credit card orders.
Add \$5. for C.O.D. orders

DALTEX SYSTEMS ✓ 371

5308 PRINCE
LAKE DALLAS, TEXAS 75065
817-497-2910

```

TERMS AND HOW YOU"
800 PRINT"SHOULD ADJUST YOUR AIM AND DEPTH SETTING : "
810 PRINT@212,CHR$(94); " = INCREASE E-W COORDINATE"
820 PRINT@276,CHR$(93); " = DECREASE E-W"
830 PRINT@340,CHR$(91); " = DECREASE N-S"
840 PRINT@404,CHR$(92); " = INCREASE N-S"
850 PRINT@468,"UP = DECREASE DEPTH"
860 PRINT@530,"DOWN = INCREASE DEPTH"
870 PRINT@706,"YOUR ORDERS ARE : "
880 PRINT@770,"FIND AND DESTROY THE
    U - B O A T I"
890 GOSUB 1640
900 CLS:N=0:K=0
910 PRINT@10,"ENTER EAST-WEST LIMIT ( 1 TO 127 ) ";:I
    NPUT A
920 IF A<1 OR A>127 THEN PRINT@ 50,"ERROR";:GOTO910
930 CLS : RANDOM
940 PRINT@ 10,"ENTER NORTH-SOUTH LIMIT ( 1 TO 47 ) ";
    :INPUT B
950 IF B<1 OR B>47 THENPRINT@ 50,"ERROR";:GOTO910
960 CLS
970 L=A*B:PRINT@0,"YOU HAVE";L;"SQUARES TO SEARCH.";
980 C=INT(127/A):D=INT(47/B)
990 E=RND(A)
1000 F=RND(B)
1010 G = RND(15)
1020 FOR L=1 TO 800: NEXT
1030 PRINT@ 0,"ENTER TARGET VALUES (E-W, N-S, DEPTH)";
1040 PRINT@37,"";
1050 PRINT@37,"";
1060 INPUT H,I,J
1070 PRINT@49,"";
1080 IF H<1 OR H>A THEN PRINT@50,"ERROR";:GOTO 1030
1090 IF I<1 OR I>B THEN PRINT@50,"ERROR";:GOTO 1030
1100 IF J<1 OR J>15 THEN PRINT@50,"ERROR";:GOTO 1030
1110 N=N+1:X=B*C:Y=I*D:PRINT@50,"";
1120 X=X-INT(C/2):Y=Y-INT(D/2)
1130 FOR L=1 TO 6
1140 RESET(X,Y)
1150 FOR M=1 TO 40:NEXT M
1160 SET(X,Y)
1170 FOR M=1 TO 40:NEXT M
1180 NEXT L
1190 IF H=E AND I=F AND J=G THEN 1580
1200 PRINT@ 49,"";
1210 IF H<E THENPRINT CHR$(94);CHR$(94);CHR$(94); " ";:G
    OTO 1230
1220 IF H>E THENPRINT CHR$(93);CHR$(93);CHR$(93); " ";
1230 IF I<F THENPRINT CHR$(92);CHR$(92);CHR$(92); " ";:G
    OTO 1250
1240 IF I>F THENPRINT CHR$(91);CHR$(91);CHR$(91); " ";
1250 IF J < G THENPRINT"DOWN";:GOTO1270
1260 IF J > G THENPRINT"UP" ";
1270 IF N < 9 THEN1030
1280 IF K <> 0 THEN1360
1290 K=1
1300 FOR L=1 TO 8

```

ordinates. Calculate these modifiers in line 980 and keep them in C and D.

Lines 990-1010 generate the U-boat's position. Keep secret the east-west coordinate in E, the north-south coordinate in F and the depth in G.

The player now gets a shot at the U-boat. The computer tells him to enter the target values. Before he does this, a waiting loop is executed in line 1020, to let him know that he has L squares to search.

The three entered coordinates go into H, I and J (1030-1060) and are checked for errors. What is this check? The player cannot accept any coordinate less than 1 or larger than the chosen limits.

Add one to the number of attacks (counter N). To show the location of this depth-charge on the screen, lines 1110 and 1120 must calculate it, while lines

1130-1180 do the flashing.

An Example

Here's an example. Assume the player answered the area limit question with two east-west and two north-south squares. Thus, A=2 and B=2.

Looking at line 980, C will be 63 (127 divided by 2), and D will be 23 (47 divided by 2). If the player entered the coordinates 1,1 (H = 1, I = 1), X will be 1 times 63 (H times C). Y will be 1 times 23 (I times D) lines 1110.

In the next line 1120 these values are adjusted for the middle of their areas. X equals 63 minus 31 (63 divided by 2), which is 32. Y equals 23 minus 11 (23 divided by 2), which is 12, so the instruction is SET(32,12), and if you look at the screen layout you will see that this point is in the middle of square 1,1, the top-left square.

Back to our flowchart and pro-

```

1310 PRINT@960,"WARNING! U-BOAT IS MOVING AWAY
      WARNING";
1320 FOR M=1TO150: NEXT M
1330 PRINT@960,"";
1340 FOR M=1TO30: NEXT M
1350 NEXT L
1360 IF (E+1>A) + (F+1>B) THEN1390
1370 IF N > 25 THEN1390
1380 E=E+1:F=F+1:GOTO 1030
1390 P=E*C:O=F*D:P=P-INT(C/2):O=O-INT(D/2)
1400 FOR L=1 TO 10
1410 PRINT@960,"WARNING! U-BOAT IS A
      TACKLING";
1420 PRINT@0,"SONAR REPORTS: TORPEDO RUN
      NING";
1430 SET(P,O)
1440 FOR M=1 TO 100:NEXT M
1450 PRINT@960,"$";
1460 PRINT@0,"";
1470 RESET(P,O)
1480 FOR M=1 TO 30:NEXT M
1490 NEXT L
1500 PRINT@ 0,"YOU ARE DISABLED BY ENEMY TORPEDO, U-BO
      AT ESCAPES.";
1510 FOR L=1 TO 2000:NEXT L
1520 PRINT@960,"THE U-BOAT WAS AT";E;"-";F;"-";G;" ";
      N;"DEPTH-CHARGES USED";
1530 PRINT@ 0,"DO YOU WANT TO PLAY AGAIN (YES / NO)
      ";
1540 INPUT AS
1550 IF LEFT$(AS,1)="Y" THEN 900
1560 CLS:PRINT CHR$(23)
1570 PRINT@ 524,"THE END";:GOTO 1570
1580 PRINT@ 0,"YOU SUNK THE U-BOA
      T";
1590 FOR L=1 TO 1000:NEXT L
1600 PRINT@0,"";
1610 PRINT@960,"";
1620 GOTO 1520
1630 END
1640 ' SUBROUTINE TO DISPLAY MESSAGE AND TO WAIT UNTIL
1650 ' THE SPACE BAR IS DEPRESSED
1660 PRINT@960,STRINGS(63,".");
1670 PRINT@980,"PRESS WHEN READY.";
1680 FOR SS=1 TO 30:SS$=INKEY$:IF SS$<>" " THEN 1720ELSE
      NEXT SS
1690 PRINT@986,"SPACE";
1700 FOR SS=1 TO 30:SS$=INKEY$:IF SS$<>" " THEN 1720ELSE
      NEXT SS
1710 GOTO 1670
1720 SS=99:NEXT SS:RETURN

```

gram. Check for a hit in line 1190 by comparing the coordinates of the U-boat with the entered ones. If it is a hit, line 1580, informs the player that he has destroyed a U-boat.

The coordinates and number of depth-charges used are shown in line 1520. Now ask the player if he wants to play again, and if the response starts with a Y (lines 1530-1550), the computer goes where the connector A orders it, to line 900. If the response is N, we set the screen for wide letters, print THE END and enter an endless loop (lines 1560-1570). This can be replaced with a timing loop and an End statement.

If the player misses, the computer must show where the U-boat is in relation to the depth-charge. Start at line 1200, if the entered east-west coordinate is smaller than the U-boat's, then the U-boat is to the right on the

screen. The computer prints arrows pointing to the right (line 1210).

If the entered north-south coordinate is larger than the U-boat's, the U-boat is higher up on the screen and the computer points that way with up-arrows (line 1240).

Next, check the attack counter at line 1270; if the number is less than nine, go to 1030 via B, and let the player make another attack. If it is nine or larger, move the U-boat.

Line 1280 controls switch K. This is set to zero in line 900. After nine attacks set it to 1, print the warning message "U-boat is moving away" and flash it (lines 1300-1350). If switch K were 1, you bypass all this and check whether you can move the U-boat (line 1360).

If you can move it, you first check the attack counter N again, in line 1370, and if this

COMPUTER PIRATES & DATA THIEVES ARE HERE...



Don't let computer pirates: DIVINE your DATA
FILCH your FILES
PERUSE your PROGRAMS

Protect them all with CRYPTTEXT, the hardware encryption module that brings ultra-high level security to the small computer user. Once encrypted, your files can be stored or transmitted in strictest privacy. A single CRYPTTEXT unit will differentially control the medical, legal or financial records, mailing lists, and design data for an entire firm.

Breaking CRYPTTEXT encrypted data is like unscrambling an egg. We don't say it's impossible but we have 3 oz. of fine gold waiting for the first person who succeeds in breaking our test message.

SECURITY SYSTEMS FOR USE WITH:

TRS-80 APPLE II SUPERBRAIN NORTHSTAR



CRYPTTEXT

P.O. Box 428
Northgate Bldg.
Seattle, WA 98128

CORPORATION


(206) 364-8585

MULLEN Computer Products

NEW TRS-80* CONTROL BOX

Special introductory price
M-80 OCTOPORT
\$159. Assem/Tested

- 8 reed relay - OUTPUTS
- 8 opto-isolated - INPUTS
- Selectable port address
- Power supply
- Assembled cable & connectors

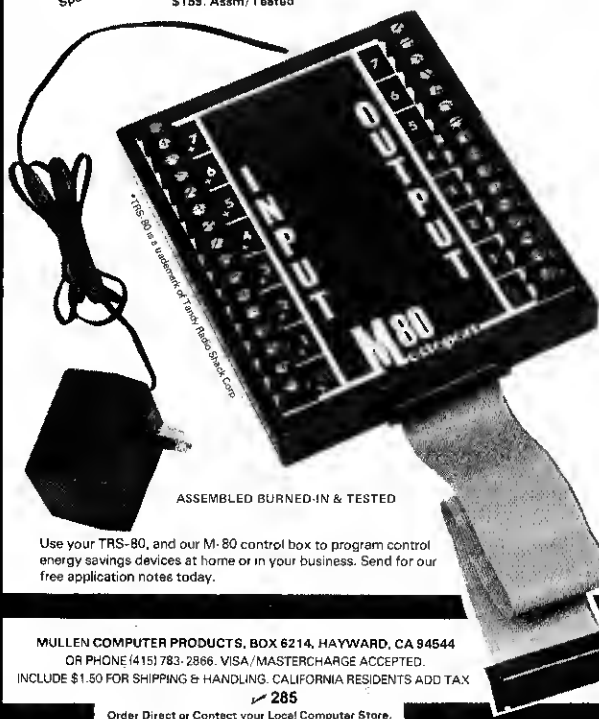

ASSEMBLED BURNED-IN & TESTED

Use your TRS-80, and our M-80 control box to program control energy savings devices at home or in your business. Send for our free application notes today.

MULLEN COMPUTER PRODUCTS, BOX 6214, HAYWARD, CA 94544
OR PHONE (415) 783-2866. VISA/MASTERCARD ACCEPTED.
INCLUDE \$1.50 FOR SHIPPING & HANDLING. CALIFORNIA RESIDENTS ADD TAX

285

Order Direct or Contact your Local Computer Store.

counter is larger than 25, the U-boat wins.

If the counter N is not larger than 25, add 1 to the U-boat's coordinates (east-west and north-south) and let the player have another run at 1030, via B.

The U-boat Wins

Looking at the flowchart, you come to line 1390 where the U-boat wins. The computer flashes the U-boat's position, calculated in line 1390. (Compare this line with lines 1110 and 1120 for the depth charge.)

Also, print U-boat attacking in line 1410 and Torpedo running in line 1420. Variables P and O will have the U-boat's coordinates and these are flashed for awhile (1400-1490). Line 1500 announces that the player is disabled, and the U-boat escapes. This stays on the screen while the timing loop at 1510 runs its course; then, you go to connector C on the flowchart.

You have reached the end of the coding, but some addresses may have to be filled in yet. Certain instructions can only be

completed after the program is written. You have to leave these addresses blank until you can fill them in at the end of your coding.

As you program, make a pencil X next to the line where you have to do some filling in. This is part of desk checking. Slowly read through your code, and look for syntax errors, for missing quotes, commas and periods.

If, while writing the instructions, you deleted some lines, check for statements that go to

these nonexistent lines.

Now is the time to enter the code for the list of variables we have been keeping. In this program they are lines 100-300.

You can renumber the lines if you have the program, but this is not mandatory.

Whether you renumber or not, now is the time to write the line numbers on the flowchart, next to the symbol to which they correspond. Later, if you want to make some changes, or explain a certain routine, this will help you locate the area. ■

BUSS EXTENDER FOR TRS-80™

ELCOMPCO Microcomputer Peripherals
P.O. Box 6133, Albany, CA 94706

DEALER INQUIRIES INVITED

✓ 63
C.O.D.



Now you can hook up to
Four Accessories
to the TRS-80™!

- * with Active Buss Termination
- * Reduces Ringing and Noise
- * Increases Reliability

\$95 available for immediate delivery

TRS-80™ is a trademark of Tandy Corp.



TIRED OF PLAYING GAMES WITH YOUR TRS-80*?

Ready to let your personal computer do some real work for you? Then you're ready for MICROCHECK-80, an exceptionally useful and usable checking account handler for 16K Level II systems. Many products have lots of fancy glitter, but leave out essential functions. Not MICROCHECK-80! It gets the job done without unneeded gimmicks, using a minimum of hardware and human effort. The programs lead you step-by-step through each operation and supporting documentation is excellent.

With MICROCHECK-80 your outstanding checks and deposits can be kept as current as desired, and month-end account balancing is a snap. Cancelled checks are stored on cassette, ready to be listed at any time on either video display or, if you have one, a line printer. A special feature allows each check to be given a code identifying the category of expense (e.g. food, medical, contributions, etc.), and the codes supplied with the system are easily tailored to individual requirements. Cancelled checks can be listed by expense category, by month, by any combination of the two, or in total. Also, a summary of expense categories is provided. Checks are normally maintained in check number order, but another special feature permits sorting and listing by any field in the cancelled check record; these include date, amount, payee, and expense category.

Why not throw away your checkbook and let MICROCHECK-80 do the arithmetic and recordkeeping for you? \$19.95 postage paid. Send check or money order, or write for detailed information:

SUMA MICROWARE ✓ 267
1110 WEST 41st STREET
LA GRANGE, IL 60525

*A trademark of Tandy Corporation.

NIXON'S* FAVORITE TAPES



BLANK CASSETTES
PREMIUM GRADE C-20'S
5 SCREW HOUSINGS
89¢ ea. 10/\$8.95 100/\$75.00
ORDERS UNDER \$20
ADD\$2 - IN OHIO ADD5-1/2%TAX

JOHNSON
DATA PRODUCTS

P.O. BOX 17176 ✓ 226
CLEVELAND, OHIO 44117

Turn your Micro into an electronic and security controller with our new... TRS-80 INTERFACE



\$59.95 90 Day Warranty
Assembled & Tested;

To Order:
Send \$59.95
plus \$2.05 for
shipping and
handling
(Illinois
Residents
add 6% tax)

TRS-80 Software
(Specify
Tape or Disk)
\$10 with
purchase of
Micro
Commander

COMPUTER CONTROLLED - REMOTE CONTROL
Now an inexpensive and direct carrier current interface between the TRS-80 and the BSR X-10 remote control modules. The MICRO COMMANDER X-10 modules and your computer can control your lights, appliances, motors, TV, stereo, heaters, alarms, fans, pumps, etc.

COMPUTER CONTROLLED - SECURITY
Add a new dimension to your security system. Place your home under control of your computer real time clock while you are on vacation. Add an input port to your computer and intelligence looms. With switches on doors or windows your computer can welcome guests or frighten intruders.

EASY TO USE - NO WIRES TO RUN
Total control of all X-10 modules. Utilize all 256 house and unit code combinations. Direct interface to AC power line. No command console to purchase. No sonic link. Plugs directly into TRS-80 Model I (Level II or Disk) cassette jack or any 1 bit input and 1 bit output TTL port.

MANUAL INCLUDES ALL SOFTWARE LISTINGS

The 14K basic 4 in 1 program does the following:
Loads machine language driver.
Simulates command console.
Provides sequential operation.
Utilizes real time clock for control.
Complete documentation includes 8080 source listing.

INTERFACE TECHNOLOGY ✓ 319
P.O. Box 383, Des Plaines, IL 60017
Phone (312) 297-2265





I made the TRS-80* into a serious computer. Now I've made the Model II into a spectacular one.

I'm Irwin Taranto, and I've helped almost a thousand businesses get their first computers up and running.

I've done it primarily with the TRS-80, because it's a really elegant piece of hardware. Given the right programs, it can do substantially the same work as the traditional minicomputers that cost four times as much.

I proved it with four on-line, interactive programs adapted from the genuine Osborne & Associates systems, originally designed for the \$30,000 Wang computer. Then I added two of my own and made them all work on a \$4000 TRS-80.

Now I've done the same thing for the new TRS-80 Model II. It's an \$8000 computer that works twice as fast and has four times the memory—up to two million characters.

My new systems are fully documented, and because I'm working with a much more powerful computer, they're a night-and-day advance over the Model I programs. They'll turn your Model II into a complete business computer, set up and ready to go.

THE TRS-80 MODEL II PROGRAMS

General Ledger/Cash Journal: handles up to 7000 transactions on 500 different user-defined accounts. It keeps track of them by month, quarter and year, makes comparisons to the prior year, and does departmentalization.

Accounts Payable/Purchase Order: generates the purchase order and posts the item to payables when the goods are received. Invoice-linked, it calculates and prints checks and aged ledger reports and links fully to the general ledger.

Accounts Receivable/Invoicing: keeps track of billed and unbilled invoices, open and closed items, aging and service charge calculation. It prints statements, links to the general ledger, and can work within either an invoice-linked or balance-forward accounting system.

Payroll/Job Costing: computes regular, overtime and piecework pay, keeps employee files, figures taxes and deductions, prints checks, journal, 941-A and W-2 forms, and breaks out individual job costs.

When I say set up and ready to go, I mean just that. If you're not quite sure on that point, call the number below and we'll give you the names of some of the people who've already bought all over the world. Call them up and hear what they have to say.

These Model II programs are completely custom-tailored, which explains their \$249.95 price. Before we'll send you a disk, you have to fill out a detailed questionnaire that tells us your precise business requirements. Then we send you the disk, all the instructions you need, and my phone number. If you call, we answer all your questions. If your questions are tough enough, I'll talk to you personally.

Because that way I'll make sure that Model II of yours turns into a spectacular computer, just like I promised.

☐ Please send me the custom questionnaires for the following \$249.95 Model II programs:

- ☐ General Ledger/Cash Journal
- ☐ Accounts Payable/Purchase Order
- ☐ Accounts Receivable/Invoicing
- ☐ Payroll/Job Costing

☐ Please send me information on the TRS-80 Model I programs at \$99.95 each

☐ Please send me information on other Taranto business programs

Your name _____

Company name _____

Address _____

City/State/Zip _____

✓ 45

Taranto
& ASSOCIATES, INC.

P.O. Box 6073, 4136 Redwood Hwy., San Rafael CA 94903 • (415) 472-2670

*A trademark of the Tandy Corporation.

The presidential simulation they play in the White House.

A Heartbeat Away

Clinton Morey
Box 534
Peerless, MT 59253

The President of the United States receives a telegram from the U.S. Ambassador to Panama. Panamanians are rioting in the streets and throwing bombs at American citizens in the canal zone. The President's advisors are divided on what to do. Some suggest taking a hard line, condemning Panama and ordering U.S. troops into the streets. Others urge caution, putting the troops on alert, but taking no overt action to further worsen the situation. What will the President do?

Computer Re-Creations

Each student in my high school government class had to make that decision, as if he were the President. The U.S.-Panama crises of 1964 occurred when Lyndon Johnson was President of the United States. To give my students an understanding of the types of decisions a President must make, I designed a

computer program to recreate this minor crises in our nation's past.

The program is not a simulation but a re-creation of an historical event, with some allowance for student interaction. It's run on a Level II, 16K. In this historical re-creation, the computer compares the student's responses with those made by President Johnson, but follows closely the true course of events regardless of the student's decisions. This allows the student to learn about an historical incident in a high interest situation, to compare his decisions with those of a real President and to evaluate the quality of the decisions made.

The computer program gives information to the President in bits and pieces. Messages from the American ambassador or the senior military officer come to the desk of the President (Fig. 1), requiring him to make some kind of decision. Later developments often require the President to alter his decisions as new facts are revealed. And, just as in real life, the President's advisors suggest alternate courses of action.

This bit-by-bit acquisition of information is important in help-

ing the student understand the decision making process. We could all be great presidents, if we had the gift of hindsight.

Classroom Discussion

There are no right or wrong answers in the course of this historical re-creation. Although some students make decisions that could possibly lead to war, the value of this computer program comes from an empathy for the tough decisions that a President must make. Thus, a very important part of the activity takes place after each student has gone through the pro-

gram, in the form of classroom discussion.

The program is not a game—but it has proven to be fun for my students who have used it. From a teacher's standpoint, the value of the program is not in the level of enjoyment, but in the changes that occur in the student. In my classes, I have seen significant changes in student's perceptions of the Presidency after working through this program.

I believe there is a place in computer instruction for historical re-creation, not just recreation. ■

```
DATE: JANUARY 5, 1964
TO: PRESIDENT MOREY
FROM: U.S. EMBASSY TO PANAMA

LARGE CROWDS OF PANAMANIAN CITIZENS HAVE GATHERED ALONG THE CANAL ZONE BOUNDARY, SHOUTING, JEERING AND THROWING ROCKS
AND ANYTHING THAT COME TO HAND.
RIOTING HAS BROKEN OUT IN COLON AND PANAMA CITY.
PANAMANIAN STUDENTS AND CIVILIANS HAVE THROWN MOLTOTOV COCKTAILS AT BUILDINGS AND AUTOMOBILES.
CARS WITH CANAL ZONE LICENSE PLATES HAVE BEEN ATTACKED AND THEIR OCCUPANTS PULLED OUT AND SAVAGELY BEATEN.
PANAMANIAN AUTHORITIES HAVE BEEN OF LITTLE HELP. PANAMANIAN POLICE FORCE HAVE STOOD ASIDE. PANAMANIAN NATIONAL GUARD UNITS
HAVE REMAINED IN THEIR BARRACKS.
CANAL ZONE POLICE FORCE TOO SMALL (ONLY 60 MEN) TO CONTROL RIOTERS.
REQUEST U.S. ARMY TROOPS BE CALLED OUT TO PROTECT CANAL ZONE.
```

Fig. 1.

Program Listing

```
10 REM THE PRESIDENT DECIDES...PART 1
15 DIM D$(14)
20 CLS:PRINT#460,"THE PRESIDENT DECIDES...PART1":FORX=1TO800
```

```

:NEXTX:CLS:PRINT"YOU ARE ABOUT TO BEGIN A SIMULATION CO
NCERNING THE TYPES OF":PRINT"DECISIONS THAT MUST BE MAD
E BY AMERICAN PRESIDENTS."
25 GOSUB10000
30 PRINT"THE SITUATIONS YOU ARE GOING TO FACE ARE REAL. PRE
SIDENTS IN THE PAST HAVE HAD TO DEAL WITH THESE ISSUE
S."
35 GOSUB10000
40 PRINT"AS YOU STUDY THE EVENTS AND MAKE DECISIONS TRY TO E
VALUATE":PRINT"NOT ONLY YOUR CHOICES BUT ALSO THOSE OF
THE PRESIDENT WHO":PRINT"MADE THE REAL LIFE DECISIONS."
50 GOSUB10010
60 INPUT"ENTER YOUR LAST NAME";N$
70 CLS:PRINT"WELCOME TO THE HALLS OF POWER PRESIDENT ";N$;".
"
80 PRINT:PRINT"YOU ARE GOING TO GO THROUGH A TIME OF TESTING
SIMILIAR TO THAT":PRINT"FACED BY PRESIDENT LYNDON JOHN
SON IN 1964."GOSUB10000
90 PRINT"THE DECISIONS YOU MAKE WILL BE COMPARED TO THE DECI
SIONS MADE BY PRESIDENT JOHNSON DURING THAT PERIOD."FO
RX=1701200:NEXTX
100 PRINT"FOR THE SAKE OF THE ENTIRE COUNTRY, I WISH YOU THE
BEST OF":PRINT"LUCK IN YOUR IMPORTANT TASK PRESIDENT "
;N$
110 GOSUB10010
130 CLS:PRINT"DATE: JANUARY 7, 1964":PRINT:PRINT
140 PRINT"PRESIDENT ";N$;" YOU HAVE BEGUN SERVING YOUR NEW T
ERM AS":PRINT"PRESIDENT ONLY SIX WEEKS AGO. A MESSAGE
ARRIVES AT YOUR DESK."FORX=1701200:NEXTX
150 LPRINT"DATE: JANUARY 7, 1964"
160 LPRINT"TO: PRESIDENT ";N$
170 LPRINT"FROM: U.S. EMBASSY IN PANAMA"
180 LPRINT"-----"
190 LPRINT"A GROUP OF AMERICAN HIGH SCHOOL STUDENTS AT BALBO
A HIGH SCHOOL IN THE PANAMA CANAL ZONE HAVE RAISED THE
AMERICAN FLAG IN"
200 LPRINT"FRONT OF THE HIGH SCHOOL BUILDING. THE PEOPLE OF
PANAMA ARE AWARE OF WHAT THE STUDENTS HAVE DONE."
210 LPRINT"-----"
220 PRINT896,"READ THE MESSAGE AND PRESS ENTER TO CONTINUE.
"
230 AS=INKEYS:IFAS="" THEN 230
240 CLS:PRINT"ALTHOUGH ON THE SURFACE THIS SEEMS LIKE AN INO
FFENSIVE ACT,"PRINT"YOU ARE AWARE THAT TROUBLE COULD R
ESULT."FORX=1701200:NEXTX
241 PRINT"THE FLAG RAISING VIOLATED AN AGREEMENT PRESIDENT K
ENNEDY HAD":PRINT"MADE WITH PANAMANIAN PRESIDENT ROBERT
O CHIARI IN 1962."GOSUB10000
242 PRINT"THE U.S. AND PANAMA HAVE BEEN TRYING TO REACH AN A
GREEMENT":PRINT"REGARDING CHANGES IN THE 60 YEAR OLD TR
EATY GOVERNING U.S."
243 PRINT"CONTROL OVER THE CANAL AND THE SURROUNDING ZONE.
NO BREAK-":PRINT"THROUGHS HAD BEEN ACHIEVED IN THOSE TA
LKS BUT THE TWO":PRINT"PRESIDENTS HAD AGREED THAT THE F
LAGS OF THEIR TWO COUNTRIES"
244 PRINT"WOULD FLY SIDE BY SIDE."GOSUB10000
245 GOSUB10010
250 PRINT"SINCE THE SUMMER OF 1963 THE CIA HAS BEEN WARNING
YOU THAT":PRINT"YOU SHOULD EXPECT DIFFICULTIES IN PANAM
A IN LATE 1963 OR EARLY":PRINT"1964."GOSUB10000
260 PRINT"THE CIA HAS SAID THAT FIDEL CASTRO, WORKING CLOSEL
Y WITH THE":PRINT"PANAMANIAN COMMUNIST PARTY, HAS BEEN
SENDING GUNS, MONEY AND":PRINT"AGENTS INTO PANAMA."
270 PRINT"THE CIA HAS SAID THAT DEMONSTRATIONS WERE LIKELY A
ND AN":PRINT"ATTEMPTED COUP AGAINST THE LEGAL GOVERNMEN
T WAS POSSIBLE."
280 GOSUB10000
290 PRINT"THE CIA ALSO WARNS THAT IF THAT DOES HAPPEN, THE C
ANAL AND THE":PRINT"CANAL ZONE WOULD BE SPECIAL TARGETS
."GOSUB10000
300 GOSUB10010
310 PRINT"JANUARY 9, 1964":PRINT:PRINT"PRESIDENT ";N$;". TW
O DAYS HAVE PASSED SINCE THE INCIDENT":PRINT"AND THINGS
IN PANAMA HAVE APPEARED STABLE."PRINT"TODAY, YOU HAVE
RECEIVED THIS MESSAGE:"
315 GOSUB10000
320 LPRINT"DATE: JANUARY 9, 1964"
330 LPRINT"TO: PRESIDENT ";N$
340 LPRINT"-----"
350 LPRINT"PANAMANIAN STUDENTS HAVE ORGANIZED PROTEST MARCH.
THEY ENTERED THE CANAL ZONE AND WENT TO BALBOA HIGH S
CHOOL."
360 LPRINT"THEY FOUGHT WITH CANAL ZONE POLICE AND AS THEY LE
FT THE CANAL ZONE, THEY BROKE WINDOWS, BURNED AUTOMOBIL
ES, AND CAUSED"
370 LPRINT"EXTENSIVE PROPERTY DAMAGE. SEVERAL STUDENTS AND
POLICEMEN WERE INJURED."
380 GOSUB 10020
390 GOSUB 10010
400 PRINT"YOU MEET WITH YOUR ADVISORS AND THEY SUGGEST THE U
.S."PRINT"TAKE THE FOLLOWING ACTIONS:"PRINTTAB(5)(1)
SEND A PROTEST TO THE PANAMANIAN GOVERNMENT."PRINTTAB
(5)(2) ASK THE GOVERNMENT OF PANAMA TO HELP."
410 PRINTTAB(5)(3) ALERT U.S. ARMY TROOPS STATIONED IN THE
CANAL ZONE."PRINTTAB(5)(4) ORDER U.S. ARMY TROOPS TO
PROTECT THE CANAL ZONE."
420 PRINT"-----"PRINT"CONSIDER THE SUGGESTIONS OF YOUR ADVISO
RS. YOU WILL BE ASKED":PRINT"MAKE A DECISION ON EACH O
NE."GOSUB10010
430 PRINT"PRESIDENT ";N$;":PRINTTAB(5)"WOULD YOU PROTEST W
HAT HAD HAPPENED TO THE GOVERNMENT OF":PRINTTAB(5)"PANA
MA (YES/NO)":INPUT$(1)
440 PRINTTAB(5)"WOULD YOU ASK THE GOVERNMENT OF PANAMA FOR H
ELP":INPUT$(2)
450 PRINTTAB(5)"WOULD YOU ALERT U.S. ARMY TROOPS STATIONED I
N PANAMA":INPUT$(3)

```

DISK DRIVE WOES? PRINTER INTERACTION? MEMORY LOSS? ERRATIC OPERATION? DON'T BLAME THE SOFTWARE!



ISO-1



ISO-2

Power Line Spikes, Surges & Hash could be the culprit! Floppies, printers, memory & processor often interact! Our unique ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

- *ISOLATOR (ISO-1A) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket \$56.95
- *ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank \$56.95
- *SUPER ISOLATOR (ISO-3), similar to ISO-1A except double filtering & Suppression \$85.95
- *ISOLATOR (ISO-4), similar to ISO-1A except unit has 6 individually filtered sockets \$96.95
- *ISOLATOR (ISO-5), similar to ISO-2 except unit has 3 socket banks, 9 sockets total \$79.95
- *CIRCUIT BREAKER, any model (add-CB) Add \$ 7.00
- *CKT BRKR/SWITCH/PILOT any model (-CBS) Add \$14.00



PHONE ORDERS 1-617-655-1532
ESP Electronic Specialists, Inc.


171 South Main Street, Natick, Mass. 01760



Dept. 8M

TSHORT +TM from WEB Associates

THE MOST
POWERFUL
BASIC
SHORTHAND
EVER!

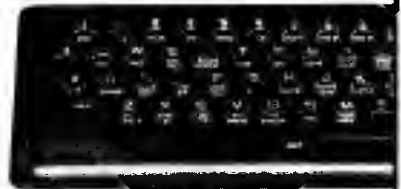

TRS-80 Keyboard with decals installed.

- 11 "SAVEABLE" KUSTOM keys. Ten 10-character and one 64-character.
 - 41 preprogrammed LV II and DOS statement keys.
 - Complete decal set (see picture) included for both LV II and DOS systems.
 - Includes DEBOUNCE and AUTO REPEAT.
 - Hold "SHIFT" or "CLEAR" and press desired key — entire statement is typed on screen.
 - Includes LOWER CASE DRIVER "@" key substitutes for "SHIFT."
 - Less than 1K bytes machine language, relocatable in hi or low memory.
 - Features self-entering commands. I.E. CONT, GOTO10; KUSTOM.
 - Includes comprehensive instruction manual.
- TSHORT + (one cassette includes Level II & single drive DOS) \$ 19.95
- TSHORT + on formatted diskette (DOS only, requires 2 or more drives) \$ 24.95

Send Check or Money Order to:
Phone Orders.

WEB ASSOCIATES

New Mail Order Address

P.O. Box 960H

Corona Del Mar CA 92625

(Calif. Residents add 6% tax)

(714) 494-2869

Dealer Inquiries Invited

UPS/COD — Add \$3.00

✓ 27

92625



SEND FOR FULL LINE CATALOG


for the TRS-80 from Micro-Mega

CASSETTE CONTROL UNIT

• Speed up your cassette tape handling • Pinpoint program locations on tape with an audio monitor • Get protection from recording and playback glitches resulting from ground loops • Eliminate the tedious plugging and unplugging of recorder cables

The Micro-Mega Cassette Control Unit does all this and more. You get instant manual control of the recorder at the flick of a switch. Want to find the beginning or end of a program? Flick another switch and you're there. All cables remain plugged in all the time.

The Micro-Mega Cassette Control Unit does a lot to improve the appearance of your TRS-80 system, too. As shown, it's a 2 1/2" x 5" box which snugly fits between the keyboard and your recorder. There is no need to move the recorder, and all cables come neatly into the unit. The Cassette Control Unit is tailored to the CTR-41 recorder, but may be used with most other recorders as well.



CASSETTE CONTROL UNIT.....\$37.95
Add \$1.00 for postage and handling

CPU MONITOR

Ever find yourself with a blank screen wondering what your computer is up to? The Micro-Mega Monitor can tell you, for example: • If your CPU is in a loop with not exit. • When a long sort is nearing completion, or • If a key bounces during keyboard input. The CPU Monitor lets you listen to all CSAVES and CLOADS and will help you quickly find the correct recorder volume setting. If you have an expansion interface, you will always know whether the real-time clock is on or off because you can hear it.

The Micro-Mega CPU Monitor gives a voice to the 2.80 microprocessor in your TRS-80 by using AM radio circuitry to pick up the computational rhythms of the CPU, which are amplified and played through a loudspeaker. The pickup unit of the CPU Monitor, shown at left in the photo, goes under your TRS-80 keyboard. It is connected by a 36" cable to a speaker and control unit, which includes an on/off volume control and an LED "power-on" indicator. The Monitor is powered by an AC adapter, shown at right in the photo. No batteries are needed and no electrical connections to your TRS-80 are required.

By listening to the CPU Monitor, you will soon become familiar with the "personalities" of the programs you run and whether they are executing in a normal way. (See "Gaming Environment" below.)




CPU MONITOR.....\$47.95
Add \$2.00 for postage and handling

THE ORIGINAL GREEN-SCREEN

The eye-pleasing Green-Screen fits over the CRT of your TRS-80 Video Display and gives you improved contrast with reduced glare. You get bright, luminous green characters and graphics like those featured by very expensive CRT units.

The Green-Screen is closely matched to the color and texture of the TRS-80 Video Display and improves the overall appearance of your system. It is attached with adhesive strips, which do not mar your display unit in any way. The Micro-Mega Green-Screen gives improved video display visibility for all applications and is especially effective in creating dramatic, high-impact displays for computer games. (See "Gaming Environment" below.)



THE GREEN-SCREEN.....\$13.95
Add \$1.00 for postage and handling

THE ULTIMATE STAR TREK PACKAGE

Tired of lurching computer games? This complete Star Trek package will provide you with endless fascination and challenge. In addition to the program cassette, it includes comprehensive instructions, a pad of "Voyage Log" record sheets, and a free-standing "Torpedo and Maneuvering Chart."

The package is built around the latest version of Lance Micklus' incomparable Star Trek III, a 13,000 byte program with a host of subtle and imaginative features, which include numerous dynamic and spectacular graphic displays. Star Trek III puts you in command of the Enterprise cruising in a galaxy of 192 quadrant filled with uncharted hazards, including hostile Klingons, pulsars, and black holes. You have at your disposal scanners, various weapons and defense systems, onboard computers, and a loyal crew (You will need them all to survive the Klingons.)

Your mission is to rid the region of Klingons and to locate five inhabitable planets, all within 300 star-days, before returning to Star Fleet Headquarters where your overall effectiveness as a starship commander will be scored. High scores are possible only with careful planning and effective battle tactics. The "Voyage Log" sheets will guide your strategy, and the "Torpedo and Maneuvering Chart" will give you a vital edge in combat. (When you engage three Klingon ships you can't afford to miss.)

STAR TREK PACKAGE (for Level II, 16K only).....\$22.95
Add \$1.00 for postage and handling

CREATE YOUR OWN SPECTACULAR GAMING ENVIRONMENT (and save \$5.00)

The Enterprise is in battle trim with deflector shields at full power. As her captain, you are taking her into combat. The battle stations siren rings in your ears and "CONDITION RED" flashes on your monitor screen. You can't let warp drive and key in the coordinates of the quadrant where your scanners have detected Klingon ships. As you select the warp factor, you hear the reassuring clicking of your navigational gear as it activates the warp drive.

Suddenly, you break out of hyperspace and your monitor displays the chilling sight of three Klingon Battle Cruisers floating on your screen! Then evil shapes glow in luminous green against the black void of space. Moments later, you hear the characteristic rasping sound of Klingon laser weapons, and, as you watch, high energy beams come knitting toward the Enterprise in succession from each of the Klingon ships.

You have been hit! You hear the damsel sound of the damage control alarm as "DAMAGE TO WARP DRIVE" and "DAMAGE TO PHASERS" flash on your screen. The Klingons have stopped firing! The Enterprise is crippled, but your best weapon is still intact, and it's your turn now! You key in the command for photon torpedoes. As your screen again displays the position of the Klingon ships, you select a taking vector from your torpedo chart and key it in. Now you hear the buzz of your photon torpedo as you see it speeding toward a Klingon ship. It strikes him dead center! As you watch, the Klingon Battle Cruiser disintegrates, accompanied by a satisfying crackling sound.

Does the above scenario sound far-fetched? Not at all! It's a small sample of what you will experience with Micro-Mega's Gaming Environment, which consists of • The Star Trek PACKAGE • THE GREEN-SCREEN and • THE CPU MONITOR. The fast-paced and dynamic action reflects the superb Star Trek III program together with the "Voyage Log" and "Torpedo Chart" of the Star Trek Package. All of the unique graphic displays are greatly enhanced by the Green-Screen. Finally, the uncanny sound effects are produced by the CPU Monitor, which faithfully picks up the FOR, NEXT loops and other CPU patterns, which create the distinctive siren sounds that accompany the ALERT and DAMAGE messages along with the harsher notes of the weapons salvoes. Once you've tried it, you won't any longer be satisfied with silent computer games.

Remember that with the Gaming Environment you also get all of the other excellent features of the CPU Monitor and the Green Screen for non-gaming applications. You also save \$5.00 off the combined cost of the individual items.

GAMING ENVIRONMENT.....\$79.85
Add \$3.50 for postage and handling

Terms: Check or money order, no CODs or credit cards, please. Add amount shown for postage and handling to price of the item. All items shipped within 48 hours by first class or priority mail. Virginia residents, add 4% sales tax.

✓29

Micro-Mega • P.O. Box 6265 • Arlington, Va 22206

```

460 PRINTTAB(5);"WOULD YOU ORDER U.S. ARMY TROOPS TO DEFEND T
HE CANAL";INPUTD$(4)
470 GOSUB10000
480 CLS:FORX=1TO10:FORX=1TO20:PRINT@465,"URGENT MESSAGE":NEX
TX:FORX=1TO20:CLS:NEXTX:NEXTZ
490 LPRINT"DATE: JANUARY 9, 1964"
500 LPRINT"TO: PRESIDENT ";N$
510 LPRINT"FROM: U.S. EMBASSY TO PANAMA"
520 GOSUB10020
530 LPRINT"LARGE CROWDS OF PANAMANIAN CITIZENS HAVE GATHERED
ALONG THE CANAL ZONE BOUNDARY, SHOUTING, JEERING AND TH
ROWING ROCKS"
540 LPRINT"AND ANYTHING THAT CAME TO HAND.":LPRINT"RIOTING H
AS BROKEN OUT IN COLON AND PANAMA CITY.":LPRINT"PANAMAN
IAN STUDENTS AND CIVILIANS HAVE THROWN MOLOTOV COCKTAIL
S AT BUILDINGS AND AUTOMOBILES."
550 LPRINT"CARS WITH CANAL ZONE LICENSE PLATES HAVE BEEN ATT
ACKED AND THEIR OCCUPANTS PULLED OUT AND SAVAGELY BEATE
N."
560 LPRINT"PANAMANIAN AUTHORITIES HAVE BEEN OF LITTLE HELP.
PANAMANIAN POLICE FORCE HAVE STOOD ASIDE. PANAMANIAN
NATIONAL GUARD UNITS":LPRINT"HAVE REMAINED IN THEIR BAR
RACKS."
570 LPRINT"CANAL ZONE POLICE FORCE TOO SMALL (ONLY 80 MEN) T
O CONTROL RIOTERS."
580 LPRINT"REQUEST U.S. ARMY TROOPS BE CALLED OUT TO PROTECT
CANAL ZONE."
590 GOSUB 10020
600 PRINT"YOUR ADVISORS HAVE SEEN THE MESSAGE. THEY SUGGEST
":PRINTTAB(5);"(1) YOU LODGE PROTEST WITH PANAMA GOVERN
MENT.":PRINTTAB(5);"(2) YOU REQUEST AID FROM THE GOVERN
MENT OF PANAMA."
610 PRINTTAB(5);"(3) YOU ORDER U.S. ARMY TROOPS TO STATION TH
EMSELVES IN":PRINTTAB(5);"THE CANAL ZONE BUT HOLD THEIR
FIRE.":PRINTTAB(5);"(4) YOU ORDER U.S. ARMY TROOPS TO PR
OTECT CANAL ZONE AND"
620 PRINTTAB(5);"FIRE ON PANAMANIAN IF NECESSARY.":PRINT"---
-----"
630 PRINT"DECIDE WHAT YOU WILL DO ON EACH OF THESE REQUESTS.
"
640 GOSUB10010
650 PRINT"PRESIDENT ";N$;": PLEASE INDICATE YOUR DECISION ON
THE FOLLOW-":PRINT"ING SUGGESTIONS.":GOSUB10000
660 INPUT"LODGE A PROTEST WITH THE PANAMANIAN GOVERNMENT";D$
(5):INPUT"REQUEST AID FROM THE GOVERNMENT OF PANAMA";D$
(6):INPUT"ORDER US TROOPS INTO CANAL ZONE BUT NOT TO FI
RE";D$(7)
670 INPUT"ORDER US TROOPS TO FIRE ON PANAMANIANS IF NECESSAR
Y";D$(8)
700 GOSUB10000
705 IF LEFT$(D$(7),1)="N" AND LEFT$(D$(8),1)="N" GOTO 720
710 CLS:IF LEFT$( D$(7),1 )=LEFT$( D$(8),1 ) PRINT"YOUR ANSW
ERS ARE INCONSISTENT PRESIDENT ";N$:PRINT"YOU HAVE ORDE
RED U.S. ARMY TROOPS INTO THE CANAL ZONE BUT CAN":PRINT
"THEY FIRE ON PANAMANIANS?":GOSUB10000:GOTO650
720 CLS:PRINT"EVALUATION OF DECISIONS...":PRINT"PRESIDENT JO
HNSON DID NOT PROTEST TO THE GOVERNMENT OF":PRINT"PANAM
A. HE DID ASK FOR THEIR AID AND HE DID ORDER U.S. ARMY
":PRINT"TROOPS TO BE CALLED OUT BUT THEY HAD ORDERS NOT
TO FIRE."
730 PRINT"-----"
740 IF LEFT$(D$(5),1)="Y"PRINT"PRESIDENT ";N$;": YOUR DECISIO
N TO PROTEST TO THE GOVERNMENT":PRINT"OF PANAMA WAS DIP
FERENT THAN THAT MADE BY PRESIDENT JOHNSON."
750 IF LEFT$(D$(6),1)="N"PRINT"YOUR DECISION NOT TO ASK THE
GOVERNMENT OF PANAMA FOR AID IN":PRINT"THIS CRISIS DIFF
ERED WITH THE DECISION MADE BY PRESIDENT":PRINT"JOHNSON
"
760 IF LEFT$(D$(8),1)="Y"PRINT"UNLIKE YOU PRESIDENT ";N$;":PR
ESIDENT JOHNSON DID NOT":PRINT"WANT AMERICAN SOLDIERS T
O FIRE ON PANAMANIAN CIVILIANS."
770 PRINT"-----":GOSUB10010
780 PRINT"CONTINUING WITH OUR SIMULATION WE WILL FOLLOW EVEN
TS AS THEY":PRINT"CONFRONTED PRESIDENT JOHNSON BASED ON
HIS DECISIONS.":GOSUB10000
790 CLS:FORX=1TO10:FORX=1TO20:PRINT@465,"URGENT MESSAGE":NEX
TX:FORX=1TO20:CLS:NEXTX:NEXTZ
795 LPRINT"DATE: JANUARY 9, 1964"
800 LPRINT"TO: PRESIDENT ";N$
810 LPRINT"FROM: COMMANDER OF AMERICAN TROOPS STATIONED IN T
HE CANAL ZONE"
820 GOSUB10020
830 LPRINT"AMERICAN SOLDIERS ARE BEING SHOT AT BY SNIPERS.
SEVERAL CASUALTIES REPORTED. REQUEST PERMISSION TO FIR
E ON SNIPERS."
840 GOSUB10020
850 CLS:PRINT"YOUR ADVISORS--THE SECRETARY OF STATE, THE SEC
RETARY OF DEFENSE":PRINT"THE DIRECTOR OF THE CIA, AND O
THER AREA SPECIALISTS ALL AGREE":PRINT"YOU SHOULD ALLOW
U.S. TROOPS TO PROTECT THEMSELVES."
860 GOSUB10000
870 PRINT"-----":P
RINT"PRESIDENT ";N$;": IT'S YOUR DECISION. WILL YOU AL
LOW U.S. TROOPS TO RETURN FIRE IN THEIR EFFORTS TO PRO
TECT AMERICANS?":INPUTD$(9)
875 IF LEFT$(D$(9),1)="N"PRINT"-----":FORX=1TO2000:NEXTX:GOTO
920
880 GOTO 1000
900 GOSUB10000
910 PRINT"ALTHOUGH PRESIDENT JOHNSON DID NOT CHOOSE TO AUTHO
RIZE U.S.":PRINT"TROOPS TO FIRE AT PANAMANIANS AS YOU D
ID, EVENTS SOON FORCED":PRINT"HIM TO TAKE THAT STEP.":G
OSUB10000
920 PRINT"SNIPER FIRE FROM PANAMANIANS KILLED FOUR AMERICAN
SOLDIERS AND":PRINT"WOUNDED SEVERAL. PRESIDENT JOHNSON
FELT THIS REQUIRED AMERICAN":PRINT"TROOPS TO RETURN FI
RE."
930 GOSUB10010
1000 CLS:PRINT"WHILE YOU CONTINUE YOUR DUTIES ON JANUARY 9,
YOUR ADVISORS":PRINT"RECEIVE A MESSAGE FROM YOUR EMBASS

```

Y IN PANAMA AND ASK YOU TO":PRINT"RETURN TO HANDLE SOME MORE DECISIONS.":GOSUB10000

1010 LPRINT"TO: PRESIDENT "NS

1020 LPRINT"FROM: U.S. EMBASSY IN PANAMA"

1030 GOSUB10020

1040 LPRINT"PRESIDENT CHIARI HAS INDICATED TO US THAT HE WILL BREAK DIPLOMATIC RELATIONS WITH THE UNITED STATES BECAUSE OF THE AGGRESSION"

1050 LPRINT"OF THE U.S. ARMY TROOPS AGAINST PANAMANIAN CITIZENS. I TRIED TO MAKE CLEAR TO PRESIDENT CHIARI THAT WE WERE ONLY DEFENDING"

1060 LPRINT"OUR NATIONALS AND PROTECTING TERRITORY LEGALLY UNDER OUR CONTROL.":LPRINT"PRESIDENT CHIARI SAID THE U.S. WOULD RECEIVE FORMAL NOTICE OF THE BREAKING OF DIPLOMATIC RELATIONS TOMORROW."

1070 GOSUB10020

1080 GOSUB10000

1090 PRINT"WITH THIS NEWS, YOU GO TO BED. YOUR ADVISORS WILL WAKE YOU IF":PRINT"IMPORTANT NEWS ARRIVES DURING THE NIGHT.":PRINT:PRINT:PRINT"SLEEP TIGHT PRESIDENT ";NS;".":GOSUB10000

1100 GOSUB10000

1110 GOSUB10010

1120 CLS:PRINT"JANUARY 10, 1964":PRINT:PRINT"THIS MORNING YOU MEET IN THE CABINET ROOM WITH YOUR ADVISORS":PRINT"TO DETERMINE WHAT YOU SHOULD DO NEXT.":PRINT

1130 PRINT"CIA DIRECTOR MC CONE POINTS OUT THAT TROUBLE HAS BEEN BREWING":PRINT"IN PANAMA FOR AT LEAST 6 MONTHS. HE SAYS PANAMA'S IRRITATION":PRINT"OVER THE FLAG INCIDENT IS UNDERSTANDABLE, BUT THAT THE"

1140 PRINT"ACTIVITIES WHICH HAVE OCCURRED SINCE THAT INCIDENT ARE PART":PRINT"OF A WELL-PLANNED ANTI-AMERICAN DEMONSTRATION.":PRINT"REVIEW THE REPORTS OF THE PREVIOUS DAY AND PRESS <ENTER> WHEN YOU WISH TO CONTINUE.":INPUT

1150 CLS:PRINT"YOUR ADVISORS RECOMMEND YOU TALK DIRECTLY WITH PRESIDENT":PRINT"CHIARI OF PANAMA.":INPUT"WILL YOU ASK YOUR STAFF TO PLACE A CALL TO CHIARI (YES/NO)";DS(10) IF LEFTS(DS(10),1)=""Y"GOTO1200

1160 GOSUB10000

1170 PRINT"UNLIKE YOU PRESIDENT ";NS;". PRESIDENT JOHNSON PLACED THE":PRINT"CALL TO CHIARI. I'M NOT SURE I AGREE WITH YOUR DECISION NOT":PRINT"TO TALK DIRECTLY WITH THE PANAMANIAN PRESIDENT."

1175 GOSUB10000

1180 PRINT"BUT LET'S GO ON WITH THE PHONE CALL AS PLACED BY PRESIDENT":PRINT"JOHNSON."

1185 GOSUB10010

1200 CLS:GOSUB10000

1210 PRINT"FOR A TRANSCRIPT OF THE PHONE CALL SEE THE TELETYPE."

1220 GOSUB10000

1230 LPRINT"TRANSCRIPT OF TELEPHONE CONVERSATION BETWEEN PRESIDENT LYNDON JOHNSON AND PRESIDENT CHIARI.":LPRINT"JANUARY 10, 1964"

1240 GOSUB10020

1250 LPRINTTAB(10)"JOHNSON: HELLO, MR. PRESIDENT. MR. PRESIDENT I WANTED TO SAY TO YOU THAT WE DEEPLY REGRET THE SITUATION OF VIOLENCE"

1260 LPRINT"THAT HAS DEVELOPED IN PANAMA. WE APPRECIATE VERY MUCH YOUR CALL TO THE PANAMANIAN PEOPLE TO REMAIN CALM. WE RECOGNIZE THAT"

1270 LPRINT"YOU AND I SHOULD DO EVERYTHING WE CAN TO RESTORE QUIET, AND I HOPE THAT YOU'LL DO EVERYTHING POSSIBLE TO QUIETEN THE SITUATION"

1280 LPRINT"AND I WILL DO THE SAME. YOU AND I SHOULD BE AWARE OF THE POSSIBILITY, AND THE LIKELIHOOD, THAT THERE ARE ELEMENTS UNFRIENDLY"

1290 LPRINT"TO BOTH OF US WHO WILL EXPLOIT THIS SITUATION."

1300 LPRINTTAB(10)"CHIARI: I FEEL, MR. PRESIDENT, THAT WHAT WE NEED IS A COMPLETE REVISION OF ALL TREATIES WHICH AFFECT PANAMA-U.S. RELATIONS"

1310 LPRINT"BECAUSE THAT WHICH WE HAVE AT THE PRESENT TIME IS NOTHING BUT A SOURCE OF DISSATISFACTION WHICH HAS RECENTLY, OR JUST NOW"

1320 LPRINT"EXPLODED INTO VIOLENCE WHICH WE ARE NOW WITNESSING."

1330 LPRINTTAB(10)"JOHNSON: MR. PRESIDENT, I AM SENDING TOMMANN, OUR ASSISTANT SECRETARY OF STATE, TO YOUR COUNTRY AS MY PERSONAL"

1340 LPRINT"REPRESENTATIVE. HE AND HIS GROUP WILL DO EVERYTHING IN THEIR POWER TO FIND A SOLUTION TO THE CURRENT PROBLEMS."

1350 LPRINTTAB(10)"CHIARI: I CAME TO WASHINGTON IN 1961 AND TALKED WITH PRESIDENT KENNEDY ABOUT TREATY REVISIONS. IN THREE YEARS, MR."

1360 LPRINT"PRESIDENT, NOT A THING HAS BEEN DONE TO ALLEVIATE THE SITUATION."

1370 LPRINTTAB(10)"JOHNSON: PRESIDENT CHIARI, WE MUST LOOK FORWARD AND NOT BACKWARD. VIOLENCE IS NO WAY TO SETTLE GRIEVANCES. FIRST, LET"

1380 LPRINT"US END THE VIOLENCE; THEN WE CAN BEGIN TO TALK OVER OUR DIFFERENCES AND FIND SOLUTIONS."

1390 LPRINTTAB(10)"CHIARI: YOUR COUNTRY HAS OFTEN SHOWN INDIFFERENCE TO PANAMA'S PROBLEMS."

1400 LPRINTTAB(10)"JOHNSON: OUR DELEGATION WILL BE ON A PLANE IN 30 MINUTES AND WILL ARRIVE IN PANAMA IN 5 HOURS. I CANNOT ACT MUCH"

1410 LPRINT"FASTER THAN THAT, MR. PRESIDENT."

1420 LPRINTTAB(10)"CHIARI: I AM GRATEFUL FOR YOUR COOPERATION, MR. PRESIDENT. I AM GLAD YOU ARE A MAN OF ACTION AND OF FEW WORDS."

1430 LPRINT"I AM SURE OUR DIFFICULTIES WILL BE IRONED OUT."

1440 GOSUB10020

1450 GOSUB10010

1460 PRINT"AS YOUR DELEGATION GETS READY TO LEAVE, YOUR ADVISORS SUGGEST":PRINT"YOU HAVE THEM...":PRINT

-----:PRINT"(1) AGREE TO EXPLORE NEW TREATY ARRANGEMENTS IF GOVERNMENT OF"

1470 PRINT"PANAMA STOPS THE VIOLENCE.":PRINT"(2) TELL PRESIDENT CHIARI HIS GOVERNMENT MUST RESTORE ORDER.":PRINT"RESUME DIPLOMATIC RECOGNITION AND AGREE TO A PLAN OF COOPERATION.":PRINT"ION IN STUDYING THE PROBLEM WITH NO PRIOR COMMITMENTS."

1480 PRINT"(3) TELL PRESIDENT CHIARI THE US DOES NOT RESPOND TO BLACKMAIL.":PRINT"AND WE WILL SEND IN ADDITIONAL TROOPS IF NEEDED.":PRINT"(4) AGREE TO ANY REASONABLE REQUESTS PANAMA WANTS IF THEY CAN":PRINT"RESTORE PEACE."

1485 PRINT"-----":INPUT"ENTER THE NUMBER OF YOUR ORDER TO THE U.S. DELEGATION";N

1490 IF N<1GOTO1450

1495 IF N>5GOTO1450

1500 ONNCGOTO1600,1700,1800,1900

1600 CLS:PRINT"PRESIDENT ";NS;". YOUR DECISION DIFFERED FROM THAT OF PRES.":PRINT"JOHNSON. PRESIDENT JOHNSON DECIDED IT WOULD NOT BE WISE TO":PRINT"GIVE IN TO DEMANDS MADE BY RIOTERS.":GOTO2000

1700 CLS:PRINT"PRESIDENT ";NS;". YOUR DECISION WAS THE SAME AS PRESIDENT":PRINT"JOHNSON'S.":GOTO2000

1800 CLS:PRINT"THIS IS A RATHER SERIOUS THREAT YOU ARE MAKING PRESIDENT":PRINT"NS;". PRESIDENT JOHNSON DID NOT CHOOSE TO MAKE THIS THREAT.":PRINT"EVEN HAD IT BEEN SUCCESSFUL, THE U.S. WOULD HAVE LOST MANY"

1810 PRINT"FRIENDS IN LATIN AMERICA."

1820 GOSUB10010

1830 GOTO2000

1900 CLS:PRINT"PRESIDENT ";NS;". HOW COULD YOU! WILL YOU GIVE IN TO ANY":PRINT"TERRORIST OR ANY GROUP OF PEOPLE WHO WANT TO PUSH THE U.S.":PRINT"AROUND FOR THEIR OWN ADVANTAGE?"

2000 GOSUB10010

2010 PRINT"PRESIDENT JOHNSON LET THE GOVERNMENT OF PANAMA KNOW THE U.S.":PRINT"WOULD NOT CONSIDER REQUESTS FOR TREATY NEGOTIATIONS":PRINT"UNTIL THE VIOLENCE HAD STOPPED AND PANAMA RESUMED DIPLOMATIC":PRINT"RECOGNITION OF THE U.S."

2020 GOSUB10000

2030 PRINT"IT TOOK SEVERAL DAYS BEFORE PANAMA REALIZED THE U.S. WOULD":PRINT"NOT BACK DOWN FROM ITS STAND.":GOSUB10000

2040 PRINT"PRESIDENT CHIARI, REALIZING NOTHING WAS TO BE GAINED FROM":PRINT"THE RIOTING ORDERED THE PANAMA NATIONAL GUARD OUT OF ITS":PRINT"BARRACKS. ORDER WAS QUICKLY RESTORED.":GOSUB10000

2050 INPUT"PRESS ENTER TO CONTINUE";O:CLS:PRINT"THE CRISES WENT AS OVER. WITHIN A FEW MONTHS PANAMA AND THE":PRINT"U.S. WERE AGAIN ON FRIENDLY TERMS.":GOSUB10000

3000 PRINT"END OF SIMULATION."

9999 END

10000 FORX=1TO1200:NEXTX:RETURN

10010 PRINT"0896,"PRESS <ENTER> TO CONTINUE."

10015 AS=INKEY\$:IFA\$="" THEN 10015

10016 CLS

10017 RETURN

10020 LPRINT"-----"



SYSTEM DESK

- Turn-key power-up, provides security access and controls power to all components. The CPU and all attachments power-up together, ready for processing.
- Built-in cooling fan keeps disk drives, expansion interface, and CPU/keyboard in optimal temperature operating range.
- Built-in power outlet strip (10 grounded outlets, UL approved) leaves room for complete expansion of the TRS-80 computer. One AC power cord (10 feet) external to desk powers all components.
- Solid 1/2" wood construction throughout with beautiful walnut-grain laminate resists burns, marks, etc. while blending perfectly into any office or home decor.
- All cables, power cords, and connections are completely hidden from view and are accessible to tampering.
- Recessed and lowered keyboard facilitates more relaxing (and therefore more accurate) data entry.
- Holds the full complement of TRS-80 Model I components:
 - up to 4 mini-disk drives
 - expansion interface
 - keyboard
 - CRT display
 - 2 cassette player/recorders
 - almost any printer
- Built-in and recessed RESET button extension eliminates fumbling with pens or pencils trying to "restart" your system yet does not attach to your TRS-80 in any way.
- Absolutely no modification whatsoever to TRS-80 hardware; your warranty remains intact.
- Two full-size drawers provide plenty of storage space. Top drawer is 5 1/2" high for easy vertical storage of mini-disks and bottom drawer is perfect for suspension filing systems.
- Forms may be fed thru printer from bottom of desk (ample slots are provided) or rear of printer. If printer is not used, a matching filler is provided for slot in top of desk.
- Dimensions same as normal desk: 60" L x 30" W x 29" H.
- Removable top allows access to electrical connections and cables.
- PRICE — \$399.00

312

COMPUTER BUSINESS SYSTEMS

329 S. Highland Avenue

Lombard, Illinois (312) 932-1344

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

THE ORIGINAL MAGAZINE FOR OWNERS OF THE TRS-80™* MICROCOMPUTER

SOFTWARE
FOR TRS-80™
OWNERS

COMPUTRONICS INC.

MONTHLY
NEWSMAGAZINE
FOR TRS-80™
OWNERS

MONTHLY NEWSMAGAZINE Practical Support For Model I & II

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- MARKET PLACE
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS
- AND MORE

PROGRAMS AND ARTICLES PUBLISHED IN OUR FIRST 12 ISSUES
INCLUDE THE FOLLOWING:

- A COMPLETE INCOME TAX PROGRAM (LONG AND SHORT FORM)
- INVENTORY CONTROL
- STOCK MARKET ANALYSIS
- WORD PROCESSING PROGRAM (FOR DISK OR CASSETTE)
- LOWER CASE MODIFICATION FOR YOUR VIDEO MONITOR OR PRINTER
- PAYROLL (FEDERAL TAX WITHHOLDING PROGRAM)
- EXTEND 16-DIGIT ACCURACY TO TRS-80™ FUNCTIONS (SUCH AS SQUARE ROOTS AND TRIGONOMETRIC FUNCTIONS)
- NEW DISK DRIVES FOR YOUR TRS-80™
- PRINTER OPTIONS AVAILABLE FOR YOUR TRS-80™
- A HORSE SELECTION SYSTEM***ARITHMETIC TEACHER
- COMPLETE MAILING LIST PROGRAMS (BOTH FOR DISK OR CASSETTE SEQUENTIAL AND RANDOM ACCESS)
- RANDOM SAMPLING***BAR GRAPH
- CHECKBOOK MAINTENANCE PROGRAM
- LEVEL II UPDATES***LEVEL II INDEX
- CREDIT CARD INFORMATION STORAGE FILE
- BEGINNER'S GUIDE TO MACHINE LANGUAGE AND ASSEMBLY LANGUAGE
- LINE RENUMBERING
- AND CASSETTE TIPS, PROGRAM HINTS, LATEST PRODUCTS COMING SOON (GENERAL LEDGER, ACCOUNTS PAYABLE AND RECEIVABLE, FORTRAN 80, FINANCIAL APPLICATIONS PACKAGE, PROGRAMS FOR HOMEOWNERS, MERGE TWO PROGRAMS, STATISTICAL AND MATHEMATICAL PROGRAMS (BOTH ELEMENTARY AND ADVANCED) ... AND

FREE



WORD PROCESSING PROGRAM (Cassette or Disk) For writing letters, text, mailing lists, etc., with each new subscriptions or renewal.

LEVEL II RAM TEST (Cassette or Disk) Checks random access memory to ensure that all memory locations are working properly.

DATA MANAGEMENT SYSTEM (Cassette or Disk) Complete file management for your TRS-80™

CLEANUP (Cassette or Disk) Fast action Maze Game

ADVENTURE (Cassette or Disk) Adventure #0 by Scott Adams (From Adventureland International)

* TRS-80™ IS A TRADEMARK OF TANDY CORP

FREE

SEND FOR OUR NEW 48 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80™ PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). \$2.00 OR FREE WITH EACH SUBSCRIPTIONS OR SAMPLE ISSUE.

COMPUTRONICS

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

ONE YEAR SUBSCRIPTION \$24

TWO YEAR SUBSCRIPTION \$48

SAMPLE OF LATEST ISSUE \$ 4

START MY SUBSCRIPTION WITH ISSUE

(#1 - July 1978 • #7 - January 1979 • #12 - June 1979 • #18 - January 1980)

NEW SUBSCRIPTION RENEWAL



**24 HOUR
ORDER
LINE**
(914) 425-1535



**NEW TOLL-FREE
ORDER LINE**
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

**NEW!!!
MOD-II NEWSLETTER
\$12/year (or 12 issues)**

CREDIT CARD NUMBER EXP. DATE

SIGNATURE

NAME

ADDRESS CITY STATE ZIP

*** ADD \$6/YEAR (CANADA, MEXICO) - ADD \$12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***

H & E COMPUTRONICS INC.

...EVERYTHING FOR YOUR TRS-80™...

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

★ All Orders processed within 24-Hours

★ 30-Day Money Back Guarantee on all Software (less a \$3 penalty for handling)

★ 10-Day Money Back Guarantee on Disk Drives and Printers PLUS 120-Days Free Service

<p>• LEARNING LEVEL II By David Lien The Original Author Of The Level Manual A Step By Step approach to Learning Level II especially geared to new TRS-80™ Owners \$15.95</p>	<p>FROM RACET COMPUTES • REMODEL-PROLOAD - Renumbers program lines, combines programs. The only renumber program that will renumber the middle of a program. Specify 16K, 32K or 48K. Works with Cassette or Disk \$34.95 • GSF - Use in your Basic Programs for Instant Sorting (will sort 1000 items in 9 seconds). Other commands include Compress and Uncompress Data, Duplicate Memory, Display Screen Controls and Fast Graphic Controls \$24.95 (For Cassette or Disk, specify 16K, 32K or 48K) • DOSORT - All G.S.F. commands plus special Multiple Disk Sorting Routines \$34.95 (Specify 32K or 48K) • INFINITE BASIC - Adds 70 commands to your TRS-80™ including Instant Sort, Matrix Commands, String Commands, Left and Right Justification, String Centering, Simultaneous Equations, Upper and Lower Case Reverse and more. (For Cassette or Disk) \$49.95 • INFINITE BUSINESS (Requires Infinite Basic) Eliminate Round-off error, 127-Digit Calculation Accuracy, Insert New Elements in Sorted Arrays, Automatic Page Headings, Footings and Pagination, Multiple Precision Arithmetic and more. (For Cassette or Disk) \$29.95 • COPYSYS - Copy Machine Language Programs (For Cassette Only) \$14.95 • DSM (Disk Sort Merge) \$75.00</p>	<p>FROM APPARAT NEW DOS + \$99.95 35, 40 and 77 Track Versions available. • NEW DOS/80 (With variable record length files, chainings and many other features) \$149.95</p>
<p>• TRS-80™ DISK AND OTHER MYSTERIES Over 100 pages of indispensable information for disk owners. Learn to recover information from bad disks, how to make Basic programs unlistable and 12 more chapters of never published tips and information. Written by H.C. Pennington. (For all Disk Owners). \$22.50</p>		<p>FROM THE BOTTOM SHELF • CHECKBOOK II (For Cassette or Disk) \$39.95 • SYSTEM DOCTOR (A complete diagnosis of your TRS-80™...Checks memory, video, cassette, disk, ROM, and all other parts of your system) For Cassette or Disk \$28.50 • CHECKBOOK REGISTER ACCOUNTING SYSTEM (Requires 2 disk drives) \$75.00 • LIBRARY 100 - 100 established business, game and educational programs plus FREE Tiny Pilot all for \$49.50 • BASIC TOOL KIT - Lists all variables, GOTO's and GOSUB's in your program \$19.80</p>
<p>NEW SBSG BUSINESS SYSTEM FOR MODEL I OR MODEL II - IN STOCK - General Ledger - Accounts Receivable - Accounts Payable - Payroll - Inventory Control with Invoicing • Each module can be operated individually or as a coordinated SYSTEM. Turn-Key error catching operation for beginners. • Complete manual and documentation accompany each program. • Minimum System requirements 2-Disk Drives for Model I...1-Disk Drive for Model II • Each module can be formatted to span data on up to 4-Disk Drives • Free 30-Day telephone consultation • Call for complete specifications • Model I Version \$125.00 Per Module \$495.00 Per System • Model II Version \$225.00 Per Module \$995.00 Per System</p>	<p>FROM SMALL SYSTEM SOFTWARE • RSM-2 Machine Language Monitor \$26.95 • RSM-2D Disk Version of RSM-2 \$29.95 • DCV-1 Converts Machine Language Programs from tape to disk \$9.95 • AIR RAID - The ultimate TRS-80™ game converts your TRS-80™ into a real time shooting gallery \$14.95 • BARRICADE - A fast pong style game \$14.95 • CPM - (For Disk Only) \$150.00 • TRS-232 INTERFACE - Interface with Software driver RS-232 printers to your TRS-80™ \$49.95 • TRS-232 FORMATTER - Additional (optional) Software for TRS-232 owners. Adds many printer commands to your TRS-80™ \$14.95 (With purchase of TRS-232) \$9.95 • PENMOD - Use the Electric Pencil with RS's slower case modification \$19.95</p>	<p>• SOUNDWARE - Adds sound to your TRS-80™ Just plus it in \$29.95 Sample programs included • TING TONG - Can be used with Soundware for a Sound version of pong \$9.95 • VIC - The Carla Visual Instructional Computer Program \$19.95 The Level II 16K Cassette is designed to teach beginners the Basics of Machine Language and Assembly Language Programming. See every Machine Language Instruction Display on your video. VIC includes Step By Step 55 page manual</p>
<p>DATA MANAGEMENT SYSTEMS - DMS replace index cards or any data requiring long lists of information. • TBS In-Memory Information System (For Cassette Systems) \$39.95 • TBS Disk Data Manager (Requires 1 or more disk drives)...Set up fast random access, files in minutes. Stores up to 320K of information on 4 Drives. Up to 10 fields and 255 characters per record. Supports upper and lower case, RS-232 or TRS-232...Features complete editing \$49.50 • Personal Software CCA Data Management System...Completely user oriented, menu drive, 130 page Step By Step Manual...Capable of inventory control, sorting data, reporting data in nearly any form (for reports and mailing labels). Sorts data by up to 10 fields for zip code, balance due, geographic location or whatever. Prints reports with subtotals and totals automatically calculated. Fast random access \$75.00</p>	<p>FROM GALACTIC SOFTWARE • MAIL PAC - For Model I Disk Systems only \$99.95 Quick-sorting full user control over mailing list from Galactic Software. • STOCK MARKET PAC \$99.95</p>	<p>VISTA V80 DISK DRIVE - \$395.00 110K of Storage Add \$29.95 for Cable (Free with purchase of 2-Disk Drives). 10 day money back guarantee. FROM HOWE SOFTWARE • MON-3 - Machine Language Programming for beginners. MON-3 is a complete System Monitor with Users Manual \$39.95 • MON-4 - Disk Version of MON-3 \$49.95 FROM MICROSOFT • LEVEL III BASIC \$49.95 Now Cassette owners can add Disk Commands to their TRS-80™ without owning a Disk Drive • MICROSOFT DISK ADVENTURE \$29.95 • TRSDOS BASIC COMPILER \$195.00 Run Basic Programs up to 15 times faster. • NEC BUSINESS QUALITY PRINTERS (For MOD-I or MOD-II) \$2,995.00 THE ELECTRIC PENCIL Cassette \$99.95 Disk \$150.00 MOD-II Version \$325.00 • HORSE SELECTOR II By Dr. Hal Davis The TRS-80™ version updated for the TRS-80™ and originally reviewed in Systems and Methods \$50.00</p>

COMPUTRONICS
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

HOURS: 9-5

Monday thru Saturday

48-Page Catalog \$2 FREE With Any Order

Order By Phone Or Mail

Add \$1 Per Order For Shipping Within UPS Areas

Add \$3 For C.O.D.

Add \$3 For All Foreign And Non-UPS Shipments

Add \$3 For UPS Blue Label



24 HOUR ORDER LINE

(914) 425-1535



NEW TOLL-FREE ORDER LINE

(OUTSIDE OF N.Y. STATE)

(800) 431-2818

...EVERYTHING... FOR MOD-II OWNERS

NEW MOD-II NEWSLETTER

MOD-II Catalog Free w/subscription **\$12/year**

MAIL PAC **\$199.95**

MICROSOFT BASIC COMPILER **\$395.00**

MICROSOFT BASIC **\$325.00**

GSF SORT ROUTINE **\$50.00**

CP/M **\$170.00**

PEACHTREE BUSINESS SOFTWARE **Call**

WORD STAR **\$495.00**

H & E COMPUTRONICS INC.

...**EVERYTHING FOR YOUR TRS-80™**...

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation



**SMALL BUSINESS
SYSTEMS GROUP**

COORDINATED BUSINESS SYSTEMS

- EACH MODULE CAN BE OPERATED INDIVIDUALLY OR AS A COORDINATED SYSTEM.
- TURN-KEY ERROR CATCHING OPERATION FOR BEGINNERS
- FREE 30-DAY TELEPHONE CONSULTATION WITH SBSG
- EACH MODULE CAN BE FORMATTED TO SPAN DATA ON UPTO 4 DISK DRIVES.
- COMPLETE MANUAL AND DOCUMENTATION ACCOMPANY EACH MANUAL
- MINIMUM SYSTEM REQUIREMENTS - 2 DISK DRIVES FOR MODEL I...1-DISK DRIVE FOR MODEL II

ACCOUNTS PAYABLE

The accounts payable system receives data concerning purchases from suppliers and produces checks in payment of outstanding invoices. In addition, it produces cash management reports. This system aids in tight financial control over all cash disbursements of the business. Several reports are available and supply information needed for the analysis of payments, expenses, purchases and cash requirements. All A/P data feeds General Ledger so that data is entered into the system just once. These programs were developed 5 years ago for the Wang micro-computer and have been tested in many environments since then. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding many larger systems.

ACCOUNTS RECEIVABLE

The objective of a computerized A/R system is to prepare accurate and timely monthly statements to credit customers. Management can generate information required to control the amount of credit extended and the collection of money owed in order to maximize profitable credit sales while minimizing losses from bad debts. The programs composing this system were developed 5 years ago, especially for small businesses using the Wang Microcomputer. They have been tested in many environments since then. Each module can be used stand alone or can feed General Ledger for a fully integrated system.

PAYROLL

Payroll involves many complex calculations and the production of reports and documents, many of which are required by government agencies. It is an ideal candidate for the computer. With this Payroll system in-house, you can promptly and accurately pay your employees and generate accurate documents/reports to management, employees, and appropriate government agencies concerning earnings, taxes, and other deductions. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding) many larger systems.

CAPABILITIES:

- ★ performs all necessary payroll tasks including:
 - file maintenance, pay data entry and verification
 - computation of pay and deduction amounts
 - printing of reports and checks
- ★ can handle salaried and hourly employees
- ★ employees can receive:
 - hourly or salary wage
 - vacation pay
 - holiday pay
 - piecework pay
 - overtime pay

(Continued on next page)

CAPABILITIES

- ★ menu driven; easy to use; full screen prompting and cursor control
- ★ invoice oriented; everything revolves around the invoice; handles new invoice or credit memo or debit memo
- ★ invoice information recorded; invoice #, description, buyer, check register #, invoice date, age date, amount of invoice, discount (in %), freight, tax (\$), total payable
- ★ transaction print and file maintenance procedures insure accuracy
- ★ flexible check calculation procedure; allows checks to be calculated for a set of vendors - or - for specific vendors
- ★ program prints your checks; contiguous computer checks with your company letterhead can be purchased from SBSG
- ★ reports include (samples on back):
 - open item listing/closed item listing - both detail and summary
 - debit memo listing/credit memo listing
 - aging
 - check register report (to give an audit trail of checks printed)
 - vendor listing and vendor activity (activity of the whole year)
- ★ fully linked to GENERAL LEDGER; each invoice can be distributed to as many as five (5) different GL accounts; system automatically posts to cash and A/P accounts

CAPABILITIES

- ★ menu driven; easy to use; full screen prompting and cursor control
- ★ invoice oriented; invoices can be entered before ready for billing, when ready for billing, after billing or after paid
- ★ allows entry of new invoice, credit memo, debit memo, or change/delete invoice
- ★ allows for progress payment
- ★ transaction information includes:
 - type of A/R transaction
 - customer P.O. #
 - description of P.O.
 - billing date
 - general ledger account number
 - invoice amount
 - shipping/transportation charges
 - tax charges
 - payment
 - progress payment information
 - transaction print and file maintenance procedures insure accuracy
- ★ customer statements printed; computer statements with your company letterhead can be purchased from SBSG
- ★ reports include; (samples on back)
 - listing of invoices not yet billed
 - open items (unpaid invoices)
 - closed items (paid invoices)
 - aging
- ★ fully linked to General Ledger; will post to applicable accounts: debits A/R, credits account you specify

(PAYROLL CAPABILITIES CONTINUED)

- ★ employees can be paid using any combination of pay types (except, hourly cannot receive salary & salary cannot receive hourly)
- ★ special non-taxable or taxable lump sums can be paid regularly or one time (bonus, reimbursements, etc)
- ★ health & welfare deductions can be automatically calculated for each employee
- ★ earnings-to-date are accumulated and added to permanent records; taxes are computed and deducted: US income tax, Social Security tax, state income tax, other deductions (regular or one time)
- ★ paychecks are printed; computer checks with your company letterhead can be purchased from SBSG
- ★ calculations are accumulated for; employee pay history, 941A report, W-2 report, insurance report, absentee report
- ★ fully linked to General Ledger. Each employee's payroll information can be distributed to as many as (12) twelve different GL accounts; system automatically posts to cash account.

INVENTORY/CONTROL INVOICING

- OVER 1000 ITEMS ON MODEL I
- OVER 3000 ITEMS ON MODEL II
- LOW STOCK ALARM
- INVOICING DEDUCTS FROM INVENTORY
- COMPLETE INVENTORY REPORTS
- REORDER POINT REPORT
- QUICK ITEM ACCESS

CLIENT BILLING, STOCK CONTROL, DENTAL BILLING, COMMODITIES
Medicare/Medicaid billing also available

MODEL I	\$125 Per Module
	\$495 Complete System
MODEL II	\$225 Per Module
	\$995 Complete System

WE ARE THE ONLY SOFTWARE COMPANY THAT OFFERS A REFUND
WITHIN 30 DAYS ON ALL SOFTWARE (H & E COMPUTRONICS
MONTHLY NEWSMAGAZINE SUBSCRIBERS ONLY).. WE DO
CHARGE A \$3 PENALTY TO COVER POSTAGE AND HANDLING.

GENERAL LEDGER

The General Ledger accounting system consolidates financial data from other accounting subsystems (A/R, A/P, Payroll, direct posting) in an accurate and timely manner. Major reports include the Income Statement and Balance Sheet and a "special" report designed by management. The beauty of this General Ledger system is that it is completely user formatted. You "customize" the account numbers, descriptions, and report formats to suit your particular business requirements. These programs were developed 5 years ago for the Wang micro-computer and have been tested in many environments since then. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding) many larger systems.

CAPABILITIES

- ★ more than 200 chart of accounts can be handled
- ★ account number structure is user defined and controlled
- ★ more than 1,750 transactions may be entered via:
 - direct posting; done by hand; validated against the account file before acceptance
 - external posting; generated by A/R, A/P, Payroll or any other user source
- ★ data is maintained and reported by:
 - month
 - quarter
 - year
 - previous three quarters
- ★ reports (samples on back) include:
 - trial balances
 - income statement
 - balance sheet
 - special accounts reports and more
- ★ user formats reports with the following designed as you wish:
 - titles
 - headings
 - account numbers
 - descriptions
 - subtotals
 - totals
 - skip lines
 - skip pages
- ★ up to eight levels of totals - fully user designated
- ★ menu driven; easy to use; full screen prompting and cursor control

COMPUTRONICS
MATHEMATICAL APPLICATIONS SERVICE

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977



24 HOUR
ORDER
LINE
(914) 425-1535



PLEASE SEND ME:

MODEL I \$125 PER MODULE _____
 \$495 COMPLETE SYSTEM _____
MODEL II \$225 PER MODULE _____
 \$995 COMPLETE SYSTEM _____

**NEW TOLL-FREE
ORDER LINE**
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

ADDRESS _____ CITY _____ STATE _____ ZIP _____

*** ADD \$6/YEAR (CANADA, MEXICO) - ADD \$12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***

Not just another game—this one has real personality.

Slot Machine

Stewart E. Fason
115 Via La Silva
Palm Beach, FL 33480

make it easier for the guests and myself to get acquainted. After much arguing, he acquiesced, and, during a rare moment of creativity rewrote an old slot machine program.

I was the hit of the party; people stood in line to get at me. Why? Because the program now had personality. Let's take a look at the program and I'll point out features that you can add to your programs to give your computer some personality.

In line 10 multiple statements save memory. The DEFSTR function in line 20 defines s,x,y,z, and v as variables, which saves time and memory. Instead of having to type S\$, you need only type S. I already know that S is a string variable.

Lines 40-60 set the symbols on each wheel. As written, I pay a jackpot on the average of once every 200 plays. This is easily changed. See lines 90 and 100 for keys to data numbers.

The magic begins at line 200. The player gives me his name (v\$). At 700 you'll find the power of IF-THEN-ELSE. If the player has less than \$10 left, I keep quiet. However, if he has more than \$10 and has lost \$5-10 in a row, I get out the needle. At 710 I recognize when the player goes broke, and comment.

If he is down to his last dollar, I let him know that I know, at 720. When the player is down to two bucks, I am at line 730. I branch to the subroutine at 920 where a random number generator decides which remark I will

make.

Don't overlook the power of randomly generated remarks. They do away with predictability.

At line 790 the ubiquitous random number generator strikes again. Notice that if the player has increased his original \$7 to over \$25 I get mad and branch to 980 where I really have some fun.

When a player hits the jackpot at line 890 I get to show off in a dramatic way. Notice the OUT255,4. That turns on my cassette recorder. My boss had previously recorded a John Phillips Sousa march which, when a jackpot was hit, played loudly for about 10 seconds.

The OUT255,0 turns off my cassette. The GOTO 740 allows the player to continue. At the party, the GOTO 740 was changed to:

```
PRINT "I've had enough of you . . . you lucky
rat.":PRINT "Next player please.":FOR
I = 110 TO 1500:NEXT:GOTO 10
```

This reinitiates the program.

Tacky Remarks

The same night one of my colleagues was set up with an astrology/advice program. In addition to the frequent use of randomly generated tacky remarks, it had one item that really blew people's minds. Someone would walk up and see displayed the following: "Hello there. I am Dr. Himmelstein, the world renowned Psychiatrist/Astrologer. I can cast your horoscope and help you with problems.

Type in your name and we can begin the session." Who could resist such an invitation.

A guy would type in JOHN JONES and my colleague would say, "Are you the John Jones from Virginia?" Jones is now thinking, "How the hell did this computer know that?". The computer knew because our boss had placed data in the program about John Jones. The subroutine that programs something unique about each guest looks like this:

```
100 INPUT "tell me your name.":A$
110 IF A$ = "JOHN JONES" THEN PRINT
"AH YES, ONE OF THE JONES BOYS
FROM PHILADELPHIA.":GOTO 200
120 IF A$ = "JOE SMITH" THEN PRINT
"HOW'S YOUR HAIR TRANSPLANT DO-
ING?":GOTO 200
```

The above can accommodate many guests (depending on your memory). In case someone shows up who is not on file, you could make your last statement of the routine look like this:

```
150 PRINT "YOUR RECORDS HAVE BEEN
TURNED OVER TO THE CIA.":A$:" AND I
CAN'T COMMENT.":GOTO 200
```

This way you have all bases covered.

Well friends, that is the story of how I got personality. Give some to your computer and it will thank you. I've gotta scam now because I see the boss coming with the . . . oh no . . . the Electric Pencil. Rats! I was hoping for some more fun and games. ■

People seem to have the erroneous idea that we computers are dumb machines. I deny the allegation (I also resent the alligators). It is the programmers who are dumb. Oh sure, these pawky proponents of perspicacity do just fine with GOTO's, FORNEXT loops, integers and cosines; but they seldom realize that we would like to establish some rapport with our operators.

For almost two years, I slaved away doing fancy arithmetic, keeping records, sorting, adding and deleting *ad nauseum*. From time to time, I'd get to play Star Trek (oh wow). My boss wouldn't even buy me a dust cover. The bum smoked and you know what ashes do to my keyboard. Suffice it to say that life had been a real drag.

Hit of the Party

Everything changed when my boss decided to throw a party for about 100 people. I suggested that he allow me to do a little showing off; something to

Program Listing

```

10 CLEAR:CLS:D=7
20 DEFSTR S,X,Y,Z,V
30 REM SET THE SYMBOLS ON EACH OF THE THREE WHEELS
40 DATA 6,5,4,2,5,6,3,2,4,1,2,6,4,5,6,1,2,4,5,1
50 DATA 4,5,3,2,4,6,4,5,6,1,5,4,5,6,1,5,6,3,4,5
60 DATA 5,1,6,5,6,5,5,4,6,5,1,1,4,5,6,1,5,6,5,1
70 DIM S(6),R(3,20),X(8),Y(8),Z(8)
80 ' DEFINE THE SYMBOLS
90 S(1)="**BELL**":S(2)="*CHERRY*":S(3)="*LEMON*"
100 S(4)="**BAR**":S(5)="*ORANGE*":S(6)="**PLUM**"
110 FOR I=1TO3:FOR J=1TO20:READ R(I,J):NEXTJ:NEXT I
120 PRINT:PRINT" WELCOME TO FASON'S CASINO.
130 PRINT:PRINT"STEP RIGHT UP STRANGER AND TRY YOUR LUC
K."
140 PRINT:PRINT"CHERRY **** ** PAYS 3, CHERRY CHERRY
**** PAYS 5"
150 PRINT"ORANGE ORANGE ORANGE OR ORANGE ORANGE BAR PA
YS 10":PRINT"PLUM PLUM PLUM OR PLUM PLUM BAR WINS
14
160 PRINT"BELL BELL BELL OR BELL BELL BAR WINS 18
180 PRINT:PRINT"BAR BAR BAR PAYS SUPER JACKPOT OF $500,
000.00
190 PRINT:PRINT"YOU HAVE $7.00 CREDIT. PLEASE TYPE YOU
R FIRST NAME.
200 INPUT"TO PULL MY ONE ARM, PRESS 'ENTER'.":V:GOTO230
220 INPUT
230 ' WHEEL TIMING INSURES SEQUENTIAL STOPS
240 R1=RND(20)+5 :R2=RND(20)+R1:R3=RND(30)+R2:I=1
250 CLS
260 IF I>R1THEN 290
270 GOSUB 750
280 A=A+1:B=B+1:C=C+1:GOTO 350
290 IF I>R2 THEN 320
300 GOSUB 750
310 B=B+1:C=C+1:GOTO 350
320 IF I>R3 THEN 430
330 GOSUB 750
340 C=C+1
350 I=I+1
360 IF A<21 THEN 380
370 A=1
380 IF B<21 THEN 400
390 B=1
400 IF C<21 THEN 420
410 C=1
420 GOTO 260
430 X=S(R(1,A)):Y=S(R(2,B)):IF C<>1THEN 450
440 C=21
450 C=C-1:Z=S(R(3,C))
460 ' CHECK FOR WINNER AND DETERMINE PAYOFF
470 IF X<>"**BAR**"THEN 510
480 IF Y<>"**BAR**"THEN 510
490 IF Z<>"**BAR**"THEN 510
500 D=D+500000:GOTO 890
510 IFX<>"**BELL**"THEN 560
520 IF Y<>"**BELL**"THEN 560
530 IF Z<>"**BELL**"THEN 550
540 D=D+18:GOTO 790
550 IF Z="**BAR**"THEN 540
560 IF X<>"**PLUM**"THEN 610
570 IFY<>"**PLUM**"THEN 610
580 IFZ<>"**PLUM**"THEN 600
590 D=D+13:GOTO 790
600 IFZ="**BAR**"THEN 590
610 IF X<>"*ORANGE*"THEN 660
620 IF Y<>"*ORANGE*"THEN 660
630 IF Z<>"*ORANGE*"THEN 650
640 D=D+9:GOTO 790
650 IF Z="**BAR**"THEN 640
660 IF X<>"*CHERRY*"THEN 700
670 IF Y<>"*CHERRY*"THEN 690
680 D=D+4:GOTO 790
690 D=D+2:GOTO 790
700 O=O+1:D=D-1:IFD<10THEN710ELSEIFD=5THENPRINT:PRINT"N
OW THINGS ARE GOING MY WAY."ELSEIFD=10THENPRINT:PR
INT"WHOOPEE, I'VE GOTCHA NOW!":O=0
710 IFD<1THENPRINT:PRINT"OH OH ":V;" YOU DID IT!":GOTO
910
720 IFD=1THENPRINT:PRINT"LAST CHANCE ":V;" GET LUCKY!
730 IFD=2THENGOSUB 920
740 PRINT:PRINT:PRINT"$";D;"LEFT ":GOTO 220
750 ' THE NEXT LINE MAKES THE WHEELS SPIN
760 FORU=1TO2:NEXT:PRINTCHR$(23):PRINT@390,S(R(1,A));S(
R(2,B));S(R(3,C)):RETURN
780 ' RANDOMLY GENERATED TACKY REMARKS
790 IFD>25THEN 980 ELSEIFD<5THEN 1070 ELSEPRINT:PRINT"W
INNER",WINNER":PRINT:Q=RND(10):IFQ=1THENPRINT"HOW
COME YOU'RE SO LUCKY?"ELSEIFQ=2THENPRINT"A TURKEY
LIKE YOU SHOULDN'T BE SO LUCKY."ELSEIFQ=3THENPRI
NT"GOOD GRIEF! YOU DID IT AGAIN!
800 IFQ=4THENPRINT"HOW CAN ANYBODY WHO LOOKS SO STUP
ID BE SO LUCKY???"
810 IFQ=5THENPRINT"YOU BETTER QUIT NOW! ":V
820 IFQ=6THENPRINT"YOU HAVE THE MAGIC TOUCH."ELSEIFQ=7T
HENPRINT"THIS IS YOUR LUCKY DAY.
830 IFQ=8THENPRINT"YOU LUCKY CREEP! ":V
840 IFQ=9THENPRINT"OH NO ":V;" ANOTHER WINNER!
850 IFQ=10THENPRINT"WITH YOUR LUCK, YOU SHOULD GO TO
LAS VEGAS.

```

```

860 GOTO 740
870 PRINTCHR$(23)
880 ' TURN ON CASSETTE RECORDER WHEN JACKPOT IS MADE
890 FORI=1TO2000:NEXTI:OUT255,4:PORT=1TO300:PRINT" SUP
ER JACKPOT SUPER JACKPOT":NEXTT:OUT255,0:CLS:GOTO
740
900 ' EVEN THE COMPUTER HAS SOME COMPASSION.
910 FORI=1TO1200:NEXT:CLS:PRINTCHR$(23):PRINT:PRINT:PRI
NT" TOO BAD ":V;" YOU LOSE":PRINT:PRINT:PRINT:PRI
NT"NEXT VICTIM PLEASE":FORI=1TO1500:NEXT:GOTO 10
920 PRINT:A=RND(5):IFA=1THENPRINT"WITH YOUR LUCK, IF YO
UR BROTHER DIED THEY WOULD BURY YOU.
930 IFA=2THENPRINT"YOU MUST BE LUCKY AT LOVE BUT":FORI=
1TO1500:NEXT:PRINT"CONSIDERING YOUR LOOKS....."
:FORI=1TO1500:NEXT:PRINT".....I DOUBT IT!
940 IFA=3THENPRINT"ARE YOU ALWAYS SO LUCKY? ":V
950 IFA=4THENPRINT"I DENY BEING RIGGED.
960 IFA=5THENPRINT"YOU DON'T DESERVE SUCH LUCK!
970 RETURN
980 H=H+1:IFH>1THEN 1040 ELSEPRINT"NOW YOU'VE MADE ME M
AD.":FORI=1TO1500:NEXTI:CLS:PRINT:PRINT:PRINT"I DO
N'T LIKE GETTING BEATEN ":V:PRINT:PRINT"KEEP IT UP
AND I JUST MAY TURN MYSELF OFF !!!
990 PRINT:PRINT"IF YOU DON'T BELIEVE IT, JUST WATCH THI
S.....
1000 FORI=1TO3700:NEXT:FORI=1TO190:E=RND(1000):PRINT@E,
"HA":NEXTI:CLS:FORI=1TO3700:NEXT
1010 CLS:PRINT:PRINT"DON'T WORRY ":V;" I'M NOT QUITTING
.
1020 PRINT:PRINT"WE COMPUTERS GOTTA HAVE SOME FUN TOO Y
OU KNOW!
1030 PRINT:PRINT"NOW LET'S GET ON WITH THE GAME ":V:GOT
O 740
1040 PRINT:U=RND(8):IFU=1THENPRINT"I'M GETTING SICK OF
THIS ":V ELSEIFU=2THENPRINTV:PRINT"I WISHED YOU HA
D STAYED HOME.
1050 IFU>4THEN0=0
1060 GOTO740
1070 PRINT:IFD=3THENPRINT"WHUE ! THAT WAS CLOSE."ELSEI
FD=4THENPRINT"JUST IN THE NICK OF TIME.
1080 GOTO740

```

DONE

BY THE TIME YOU READ THIS AD,



dial (617) 373-1599 and order Insort-80, your TRS-80* microcomputer would have sorted 1,200 names and addresses, 10,000 numbers, or any other Random Disk File from your Basic program... for only \$49.95!

"Let us sort things out for you!"

S&M SYSTEMS, INC.

P.O. Box 1225
2 Washington Street
Haverhill, Massachusetts 01830

Approximate Sort Time for Insort-80 is eight minutes.
TRS-80 is a registered trademark of the Tandy Corporation.

And now . . . a brief word from our computer.

On the Radio

Don Hastings
Box 366
Hemingway SC 29554

A broadcast log is a listing of everything that will be broadcast in a day. It must meet strict FCC requirements and must be prepared with great care. It controls every event that

must be aired, much as a computer program controls every action of a computer. Without the broadcast log, the broadcast engineer or announcer does not know what occurs next.

A Broadcast Log Program

The program we at WKYB have developed for our 32K Level II TRS-80 schedules all our programs, news, public-service and commercial announcements. It will do so within the

time limits we specify and at the specific spaces within our log we have set aside for each. Our next step is to couple the computer to a printer to actually print the log, but our program as it stands has cut log preparation time in half and produced a log far more consistent with what we want than any individual could do.

It takes our logger about 30 minutes to prepare the worksheet for entering, about 15 minutes for the computer to digest it all and less than ten to spit it all back out. It then takes another 15 minutes for the logger to copy the necessary information off the screen onto our log sheets. Presently the most time-consuming work is pre-typing the log sheets with our programs and headings and then filling in the commercial information as it has been positioned by the computer. We'll eliminate this when we add the printer and disks.

Log preparation is tedious, yet extremely critical, in broadcasting; it can drive you batty, and often does. Now we can place all the seemingly impossible requirements for each account into the computer's memory, and each is given its due consideration.

I have modified our log program, which I wrote, into a general program that most radio stations can use with a minimum of modifications. I admit this is a cut-down version, but all you need is a TRS-80 Level II with 16K. The program has no hidden loops to mess you up, so it is just begging to be customized for your particular requirements after you've run it a couple of times. Since no two radio stations will prepare their logs in exactly the same way, I recommend you first see what I have done and then tear into it at your pleasure.

Please note that I have given you a detailed description of the main variables used in the program. The unused P in this program sets the priority of accounts. You may wish to add such a feature to your modification. We use two arrays: A for all accounts and carousel positions, and L for the actual log positions.

On the Radio

All of our commercials are played from four carousels, so our program is written for use with up to four carousels (for all you non-broadcasters, a carousel is simply a drum holding up to 24 separate commercial

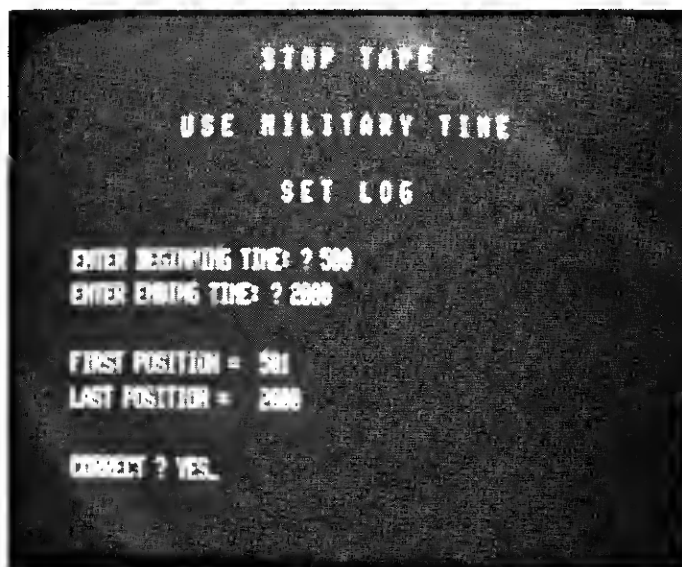


Photo 1. Setting sign-on and sign-off times. Note use of military time and conversion of time to log positions.

tapes; any one can be selected and played automatically). When entering an account, you will assign it a carousel and slot within that carousel. This becomes the account number for that log—the computer remembers an account placed in carousel #1 and in slot 12 as account 112.

If you have less than four carousels, simply load your commercials into the carousels you have. As far as the computer is concerned, you've just decided not to use the remaining carousels. If you use more than four carousels, have fun modifying the program—it isn't hard, just time consuming. If you use Go-carts, Instacarts or any device with more than 24 slot positions per source, you are in real trouble. You will have to confine yourself to 24 slots until you rewrite the program with a dimensioned array for your sources. It will probably not run in 16K. We use dimensioned arrays for all our sources, but we also have 32K memory. I modified the program so it would fit in 16K.

The log array is dimensioned with the first number designating the hour and the second number the log position within that hour. L(10,15) is the 10AM hour and the 15th position within that hour. Note, it is not 10:15! L(14,20) is the 20th position in the 2PM hour. Your logger must learn using military time if you want to use this program.

Our log hour is divided into three commercial clusters every 15 minutes, 12 per hour. A commercial cluster consists of one play of each of the four carousels. We can schedule 48 separate events in any one hour. It is improbable we'll have to do this, but the computer now has the flexibility to place an event precisely where it is needed from any one of the four carousels. If you use less than four carousels, your cluster will run as you have loaded the machines. The computer cannot shift your loads.

Before the computer starts logging your commercials, you may have some preference as to which clusters you want to use first in each hour. Line 300 is the place for this. Enter as a DATA statement the first log position of each cluster in the order you wish the clusters used. If you want the first cluster in each hour used first, enter your first data position as 1.

Please note that regardless of how many carousels you use, this program is written for four—thus the first log position of the second cluster will be position 5, the first log position of the third cluster will be 9, etc. Once you learn this, the rest is a piece of cake. The chart should help you visualize cluster positions. I have shown the clusters spread evenly around the hour. The computer doesn't care how your clusters are actually

spread. Always remember that the computer considers a cluster as four events, regardless of how many you utilize, and it should present no problem.

Set O in line 310 to how many commercial minutes you allow per hour. Set I of line 310 to the maximum commercial time you allow in any one cluster. Set B to how many commercial clusters you allow in any one hour. I hope you got the implication of that last figure. When you enter your data statement in line 300, simply skip any clusters you don't want to use. Then set B to equal

the total number of entries in your data statement.

The program still has 12 clusters, but you have placed the ones you do not want to use "off limits," so it can't place anything in those areas. If you run only six commercial breaks per hour, you will enter the first position of the six you wish to use in line 300. Set B = 6 in line 310 and your program schedules commercials only in those clusters you specified from the carousels you loaded. It does not exceed the commercial minutes you selected. You are in control.

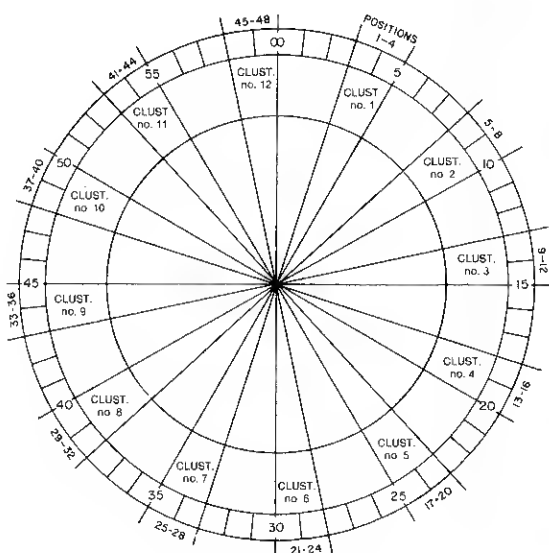


Chart of cluster positions.

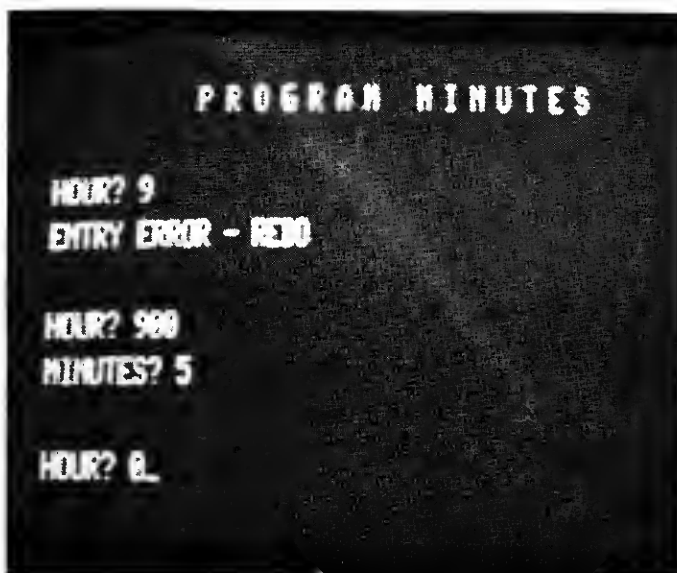


Photo 2. Entering program minutes not logged through computer. Note incorrect entry for 9 AM with prompt by computer. Example is declaring five commercial minutes during 9 AM.


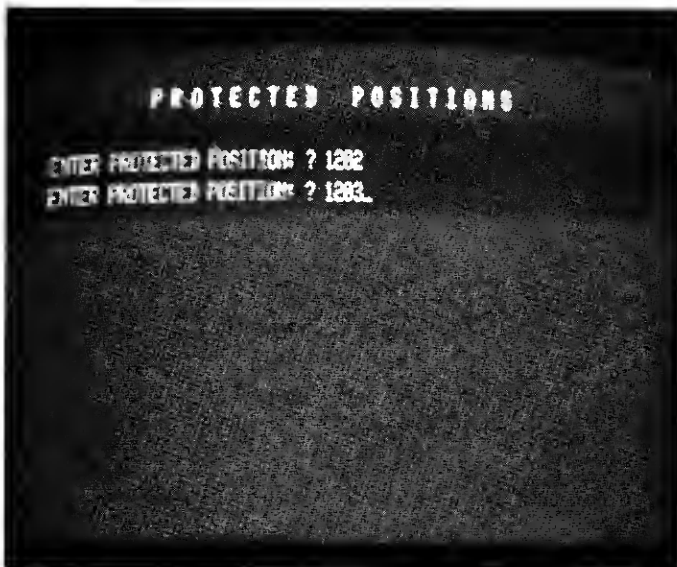


Photo 3. Example of protected position where a special feature prevents these log positions from being used. Protected positions here are the second and third log positions of the noon hour.

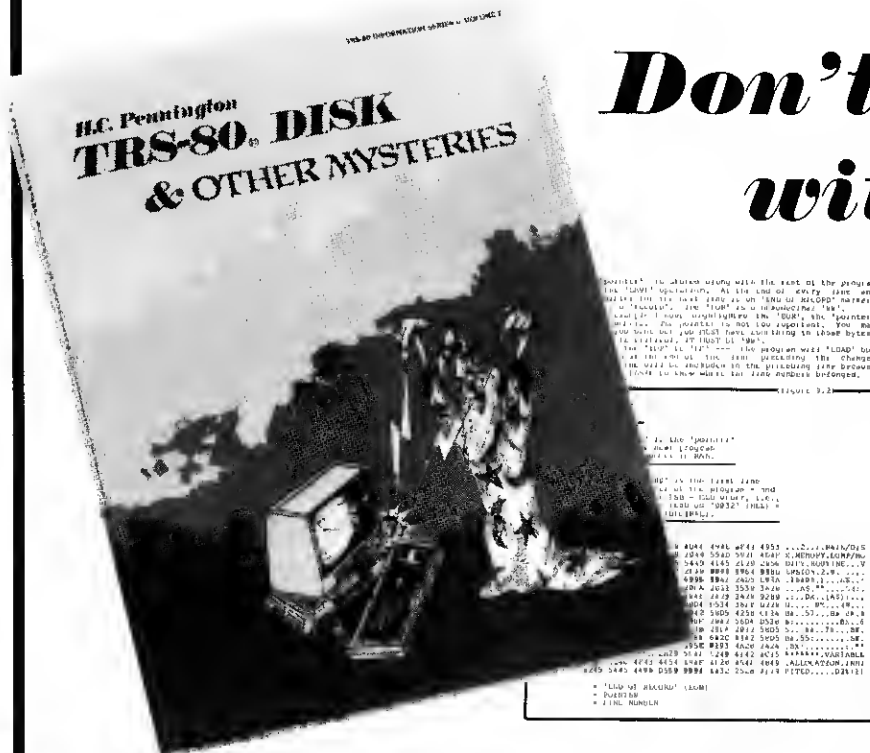

Don't boot-up without it!

**The 'How To' book of
TRS-80 data recovery**


- 130 page, 8½ x 11 softcover
- Actual memory maps, samples
- Detailed recovery instructions
- Recover lost programs, DOS errors
- Fix parity, gat and hit errors
- Recover from unreadable directory
- Fix Electric Pencil file errors
- Recover lost or killed files

TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORP.

JUST \$22.50

Get it and unveil the many disk mysteries

Gold plated
contacts

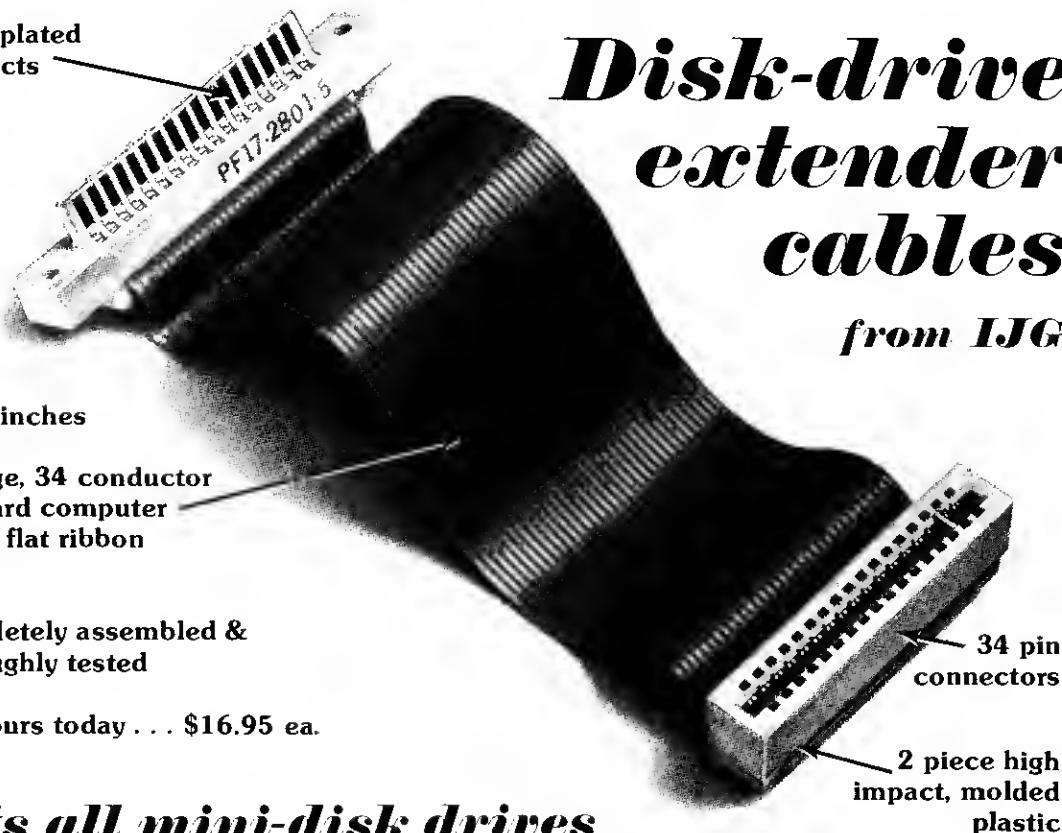

Disk-drive extender cables

from IJG

Full 9 inches

28 gage, 34 conductor
standard computer
grade, flat ribbon
cable

Completely assembled &
thoroughly tested

Get yours today . . . \$16.95 ea.

Fits all mini-disk drives

34 pin
connectors

2 piece high
impact, molded
plastic

New E·Z·ITM video screen filter

***For TRS-80[®] I&II
from IJG***

- Eliminates fatigue due to eye strain
- Two colors: Green or Amber
- Increases visual legibility
- Minimizes operator errors
- No tools needed to install
- Does not effect warranty
- 1/8 inch cast acrylic

- Priced at just \$14.50

Limits eye strain and reduces video glare



PARTIAL LISTING OF PARTICIPATING IJG COMPUTER SERVICES RETAIL DEALERS

LEVEL IV PRODUCTS, INC.

32238 Schoolcraft
Livonia, MI 48154
(313) 525-6200 (800) 521-3305

HOUSTON MICROCOMPUTER

5313 Bissonnet
Bellaire, Texas 77586
(713) 661-2005

DATA FLOW CORPORATION

24312 Via Viejo
El Toro, CA 92630
(714) 768-7623

DC COMPUTER PRODUCTS

596 Taylor Way
Belmont, CA 94002
(415) 592-4222 (800) 227-7362

COMPUTER BOOK SHOPS LTD.

Temple House 43-48 New St.
Birmingham, U.D. B24LH
(21) 643-4577 Telex 337045

THE DATA CONNECTION

11818 Wilshire Blvd.
Los Angeles, CA 90025
(213) 479-1980 M. McCartney

M M • COMPUTER

Jahnstr. 17, 8210 Prien
Germany
Tel. (08051) 4523

QUALITY SOFTWARE DIST.

11234-C Park Central Pl.
Dallas, Texas 75230
(214) 692-1055

HEINZ WILGEN

Tandy/Radio Shack Vertragshandler
Im Handenhof 11 • 2900 Oldenburg
Tel. 0441/3 68 22 Germany

ADVENTURE INTERNATIONAL

178 Okford Road
Fern Park, Florida
32730 (305) 339-8914

H & E COMPUTRONICS

10 Drexel Court
Spring Valley, NY 10977
(914) 425-1535 (800) 431-2818

BIAS, INC.

49-A Cedar St.
Manchester, CT 06040
(203) 643-2544

THE PROGRAM STORE

4200 Wisconsin Ave. N/W
Washington, D.C. 20016
(202) 337-4691

CALETRON PVBA

Vlaanderenstr 96
9000 - Gent - Belgium

PRAIRIE DATA SYSTEMS

306 Stone Place
Saskatoon, Sask - Canada
S7M4J4 (306) 384-7110



• IJG COMPUTER SERVICES

569 N. Mountain Ave. • Suite B • Upland, CA 91786 U.S.A. (714) 946-5805

E·Z·I IS A TRADEMARK OF IJG, INC.
TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORP.

✓ 37

Running the Program

After you enter the program, make a copy of it immediately before you modify it. This can save you many pains later. Also, run it a couple of times before modifying it since strange

things can happen to a modified program that hasn't been completely debugged from keyboard errors.

The first thing up on the screen is a request for your sign-on and sign-off times (military

Log program.

```
10 REM ** LOG 2.0 ** WRITTEN BY DON HASTINGS, HEMINGWAY, S.C.
12 REM ** MEMORY REQUIRED TO RUN WITH REMARKS APP 15K
15 '
20 REM ** A = ACCOUNT          N = 1ST LOG ENTRY
21 REM ** B = BREAKS           O = MAX LOG ATTEMPTS
22 REM ** C = LOGGING ADJUST   P =
23 REM ** D = TIME CONVERSION  Q = MAX SEC/HR
24 REM ** E = TIME CONVERSION  R = LENGTH SPOT LOGGED
25 REM ** F = SIGN ON TIME     S = SPOTS BEING LOGGED
26 REM ** G = SIGN OFF TIME    T = BREAK LENGTH SEC
27 REM ** H = LOG HOUR         U = EVENT START
28 REM ** I = MAX SEC PER BREAK V = EVENT END
29 REM ** J = ENTRY CONTROL RETURN W = VARIABLE
30 REM ** K = LOGGING ATTEMPTS  X = VARIABLE
31 REM ** L = LOG POSITION       Y = VARIABLE
32 REM ** M = CAROUSEL         Z = VARIABLE
33 '
40 REM ** A ARRAY = ACCOUNTS & CAROUSELS
42 REM ** L ARRAY = LOG
49 '
100 CLS:PRINT:PRINT TAB(18)"B R O A D C A S T   L O G"
110 PRINT:PRINT TAB(25)"L O G   2.0":PRINT:PRINT TAB(20)"L E
    V E L   I I - 1 6 K":PRINT:PRINT
120 PRINT"      WRITTEN BY DON HASTINGS - HEMINGWAY, SOUTH CAROLINA
    "
130 PRINT:PRINT:PRINT TAB(8)"  ":FOR X=1TO45:PRINT"";NEXT:PRINT@
    1," "
140 FOR X=1TO125:SET(X,1):SET(X,16):SET(X,45):NEXT
150 FOR Y=1TO45:SET(1,Y):SET(125,Y):NEXT
160 DIM A(500):DIM L(24,48)
170 P=100:G=2500
199 '
200 CLS:PRINT TAB(18)"S T O P   T A P E"
210 PRINT:PRINT TAB(18)"U S E   M I L I T A R Y   T I M E"
220 PRINT:PRINT TAB(20)"S E T   L O G":GOSUB9000:F=U:G=V
230 O=(G-F)/100:O=INT(O*12)+10 : REM ** PREVENT HANG-UP LATER DURI
```

```
NG LOGGING
295 '
296 REM *** LINE 300 SETS ORDER CLUSTERS WILL BE FILLED
297 REM *** Q = MAX COMMERCIAL MINUTES PER HOUR
298 REM *** I = MAX COMMERCIAL SECONDS ANY CLUSTER
299 REM *** B = COMMERCIAL CLUSTERS PER HOUR
300 DATA 1,25,17,41,9,33,5,29,21,45,13,37
310 Q=18:I=120:B=12
320 Q=Q*60: : REM ** CONVERTS Q TO SECONDS
499 '
500 CLS:PRINT TAB(10)"P R O G R A M   M I N U T E S"
510 PRINT:INPUT"HOURL":X:IF X=0 GOTO700
520 IF X<F-1 OR X>G PRINT"ENTRY ERROR - REDO":GOTO510 : REM ** TIM
    E ENTERED BEYOND LOG LIMITS
530 X=INT(X/100)
540 INPUT"MINUTES":Z:Z=Z*60:IF Z>Q GOTO540
550 L(X,0)=L(X,0)+Z:GOTO510
699 '
700 CLS:PRINT TAB(10)"P R O T E C T E D   P O S I T I O N S":PRINT
710 INPUT"ENTER PROTECTED POSITION: ":Z:IF Z=0 GOTO1000
720 IF Z<F OR Z>G GOTO 760 : REM ** TIME ENTERED BEYOND LOG LIMITS
730 X=INT(Z/100):Y=Z-(X*100):IF Y>48 GOTO760
740 L(X,Y)=100:GOTO 710 : REM ** LOG SPACE (HOUR,POSITION) SET ASI
    DE
760 PRINT:PRINT"ERROR - REDO":GOTO710
999 '
1000 CLS:PRINTTAB(10)"S P E C I A L   L O G G I N G":J=2
1010 GOSUB9400:PRINT:IF A=0 GOTO1100
1020 INPUT"POSITION: ":Z:IF Z=0 GOTO1100
1021 IF Z<F OR Z>G GOTO1050 : REM ** TIME ENTERED BEYOND LOG LIMIT
    S
1022 X=INT(Z/100):Y=Z-(X*100) : REM ** ENTRY BROKEN DOWN INTO X,Y
    ARRAY
1023 PRINT:INPUT"CORRECT (Y/N): ":X$:IF ASC(X$)=78 GOTO1060
1030 IF L(X,Y)=0 GOTO1050
1040 PRINT"OCCUPIED BY":A(L):INPUT"SHALL I REMOVE (Y/N): ":X$:IF
    ASC(X$)=78GOTO1000
1050 L(X,Y)=A:CLS:PRINT"NEXT POSITION - ACCOUNT #":A:GOTO1020
1060 A(A+24)=0:A(A)=0:GOTO1000
1090 PRINT"INCORRECT DATA - REDO":GOTO1020
1099 '
1100 CLS:PRINTTAB(10)"S P E C I F I E D   T I M E S"
1110 J=3:GOSUB9400:J=1:IF A=0 GOTO2000
1115 PRINT:INPUT"CORRECT (Y/N): ":X$:IF ASC(X$)=78 THEN A(A)=0:GOT
    O1100
1117 A(A+72)=1 : REM ** CODES THIS ACCOUNT AS A SPECIFIED TIME ENT
    RY
1120 CLS:PRINT"ACCOUNT":A,"","TIME PERIOD":J,"","SPOTS LEFT":A(A
    +48)
1130 GOSUB9000:N=1:IF V-U>800 THEN N=0
1140 PRINT:INPUT"SPOTS = ":S:IF S>A(A+48)PRINT"ENTRY ERROR":GOTO1
    40
1150 A(A+48)=A(A+48)-S:CLS:PRINT"LOGGING":GOSUB9500
1160 CLS:J=J+1:IF S<0 PRINT:PRINT"UNABLE TO LOG":S:GOTO1190
1170 IF A(A+48)<0 GOTO1120
1180 GOTO1100
1190 A(A+48)=A(A+48)+S:INPUT"OTHER TIMES AVAILABLE":Z$:IF ASC(Z$)<
    >78 GOTO1120
1195 IF S>A(A+48) GOTO1120 ELSE 1180
1199 '
2000 CLS:PRINTTAB(15)"G E N E R A L   A C C O U N T S":J=3
2010 GOSUB9400:IF A=0 GOTO2100 ELSE 2000
2098 '
2099 REM *** ACCOUNT VERIFICATION ***
2100 CLS:A=101:X=1
2110 PRINT TAB(18)"CAROUSEL NUMBER":INT(A/100)
2120 PRINT"ACCOUNT","CODE","LENGTH","SPOTS"
2130 PRINTA,A(A),A(A+24),A(A+48)
2140 A=A+1:IF X<12 THEN X=X+1:GOTO2130
2150 PRINT:INPUT"ALL CORRECT (Y/N): ":X$:IF ASC(X$)=78 GOTO2200
2160 X=1:IF A=125 OR A=225 OR A=325 THEN A=A+76
2170 IF A=425 GOTO4000
2180 CLS:GOTO2110
2200 Y=A-12:CLS:INPUT"INCORRECT ACCOUNT #":A:GOSUB9410
2210 X=1:A=Y:GOTO2180
3999 '
4000 CLS:PRINT"LOGGING GENERAL ACCOUNTS":N=0:D=F:V=G
4020 A=101
4030 IF A(A+72)=1 GOTO4050
4040 S=A(A+48):IF S=1 GOSUB9500:A(A+48)=S
4050 A=A+1:IF A=125 OR A=225 OR A=325 THEN A=A+76:GOTO4030
4060 IF A=425 GOTO4070 ELSE 4030
4070 IF N=0 PRINT:N=1:PRINT"VERIFYING":GOTO4020
4999 '
5000 CLS:PRINT"WHAT IS YOUR PLEASURE":PRINT:PRINTTAB(10)"1. ACCOUN
    T LIST"
5010 PRINTTAB(10)"2. ACCOUNT LOGGING":PRINTTAB(10)"3. LOG ANALYSIS
    "
5020 PRINTTAB(10)"4. RE-LOG":PRINTTAB(10)"5. COMPLETED LOG"
5070 PRINT:INPUT"CHOICE":X
5080 ON X GOTO5500,6000,6500,7000,8000
5498 '
5499 REM *** ACCOUNT LISTING ***
5500 X=101
5505 CLS:PRINT"ACCOUNT","NOT LOGGED","ACCOUNT","NOT LOGGED"
5510 FOR A=X TO X+11:PRINT A,A(A+48),A+12,A(A+50):NEXT
5520 PRINT:INPUT"CONTINUE ":X$:IF ASC(X$)=78 GOTO5000
5530 X=X+100:IF X<500 GOTO5505 ELSE 5000
5998 '
5999 REM *** ACCOUNT DISPLAY ***
6000 W=0:PRINT:INPUT"WHICH ACCOUNT ":A:IF A=0 GOTO5000
6010 CLS:PRINT"ACCOUNT #":A:D=INT(F/100)
6020 FORX=1TO48:IF L(D,X)=A GOTO6050
6030 NEXT:D=D+1:IF(D*100)<G GOTO6020
6040 PRINTW:"LOGGED":GOTO6000
6050 PRINT"LOGGED AT POSITION":(D*100)+X:W=W+1:GOTO6030
6498 '
6499 REM *** COMMERCIAL MINUTES ***
6500 CLS:PRINT"HOURL","MINUTES","HOURL","MINUTES"
6510 PRINT:FORX=1TO12
6520 PRINT X*100,L(X,0)/60;
6530 PRINT,(X+12)*100,L(X+12,0)/60:NEXT
6540 PRINT:INPUT"CONTINUE ":X$:GOTO5000
6998 '
6999 REM *** RE-LOG ***
7000 PRINT:INPUT"ACCOUNT #":A:IF A=0 GOTO5000
7005 IF A(A+72)=1 INPUT"SPECIFIED TIME ACCOUNT - SHALL WE CONTINUE
    ":Z$:IF ASC(Z$)=78 GOTO5000
7010 CLS:IF A(A)=0 INPUT"UNUSED POSITION - WILL YOU ADD":X$:IF ASC
    (X$)=78 GOTO7000 ELSE GOSUB9410:GOTO7050
```



Have computer, will travel. Executive Computer System Carrying Cases.

- Makes your microcomputer truly portable.
- Protects your equipment: locking latches limit access.
- Rugged black vinyl with metal corners outside.
- Protective foam rubber, black velveteen covered, inside.
- Computer can be operated without removing from case.
- And cases are custom designed for full systems.

Apple® Executive Case holds:

- Apple microcomputer.
- 9" Sanyo monitor.
- 2 disk drives.
- Power strip.
- 2 boxes diskettes.
- Manuals.
- Dimensions: 28" x 21" x 10 1/2"
- Weight: 17 pounds.
- Price: \$179

TRS-80® Executive Case holds:

- TRS-80 Microcomputer.
- Expansion interface.
- 2 disk drives.
- Power strip.
- 2 boxes diskettes.
- Manuals.
- Dimensions: 28" x 21 1/2" x 8 1/2"
- Weight: 17 pounds.
- Price: \$179

Terms: FOB Los Angeles—Master Charge, Visa or check with order. Allow 3-4 weeks for delivery.

*Registered, Apple Computers, Inc.
**Registered Trademark, Tandy Corporation.

COMPUTER TEXTile

10960 Wilshire Blvd, Suite 1504
Los Angeles, CA 90024

390 (213) 477-2196



SYSTEM SAVERS

by Tom Stibolt from Acorn

If you ever use the SYSTEM command, you should buy this two program package. These programs allow you to save any system format tape on tape or disk, plus offer several features for machine language programmers. Many two part, protected system tapes like Sargon II are not system format.

With FLEXL, which is one of the two programs, you can make back-up copies of any system format tape. Most often a cassette that you make will load easier than an original. Plus you can find the filename on any system tape because it is displayed on the screen. And at any time you can stop the reading of the tape by pressing <BREAK>.

For any machine language programmer, FLEXL offers the advantage of producing more efficient tapes than the assembler. Also, it is written to interface directly with monitor programs. And you can merge machine language tapes into one file.

Disk drive owners can use TDISK to save any system format tape onto disk. Adventure, Airaid, Ting-Tong, Editor Assembler and other programs cannot normally be loaded to disk using TRSDOS. Now, TDISK allows you to save these programs onto disk. After DOS READY you will be able to simply type the filename and be up and running. It even loads non-contiguous tapes. TDISK will greatly increase the benefit of owning a disk drive.

And as a FREE BONUS, Acorn provides instructions on how to load MicroChess 1.5 onto disk.

Complete your system with the routines not found in either Level II or DOS for only \$14.95. Order your System Savers, today!

*TRS-80 is a trademark of Tandy Corp

All programs for TRS-80 16k, Level II computer.

FLIGHT SIMULATION

from Sub-Logic

The wait is over. 3D graphics would seem impossible given the resolution of the TRS-80. But wait till you see this package. Even if you don't order it, try to see this one.

First you must learn to fly using instruments, radar and the cockpit window view. While it is easy to take off, it is even easier to crash.

Once you have some air time, bomb the enemy fuel depot. They'll send five war planes after you. Each one maneuvers differently in dogfights. Good luck.

Level I and II \$25.00

DEATH DREADNAUGHT

from Programmer's Guild

This machine language adventure is twisted! Around every turn death awaits. Be careful of what you touch.

Disgusting room descriptions. For those who would like a ghoulish adventure. \$14.95.

Also available from the Programmer's Guild are two adventures written in BASIC: Spider Mountain and Lost Dutchman's Gold. \$14.95 each.

All three on disk for \$35.00

RESCUE at RIGEL

from Automated Simulations


In this first Starquest you must save the prisoners of the evil High Tollah. There are both a different style of play and features than Dunjonquest, but similar floor graphics.

	Tape	Disk
Rescue at Rigel	\$14.95	\$19.95
Temple of Apsai	24.95	29.95
Datestones of Ryn	14.95	19.95
Morloc's Tower	14.95	19.95

THE BOOK

ACCESSING

THE TRS-80* ROM



from Insiders Software Consultants

For the learner or expert! This first of three volumes gives you access to over fifty arithmetic, mathematical, and data conversion routines. Includes from Insiders Software Consultants

For the beginner or expert! This first of three volumes gives you access to over fifty arithmetic, mathematical, and data conversion routines. Includes sample programs, a disassembler program, and a commented listing of these ROM routines.

A memory map noting over 500 addresses is included. 136 pages. \$14.95

INSIDE LEVEL II


by John Blattner, PhD from Mumford

Much to our surprise, this book and THE BOOK are complimentary. The style is easy but packed with information, though there is no commented listing of the ROM. For both Disk and Level II, complete entry and exit information is included for conversion, arithmetic, mathematical, keyboard, cassette and video routines. Part two describes how to link assembly language with BASIC. 60 pages. \$15.95

DISASSEMBLER

by Roy Soltoff from Misosys & Acorn

This two pass, machine language, Z-80 disassembler produces symbolic labels with output to either the video monitor, printer or tape. Radio Shack's Editor Assembler can load the tapes. If you own the Editor/Assembler, complete the package with this program. Program on tape for two different memory locations. Cassette version NOW only \$14.95



PINBALL

by John Allen from Acorn

Get your flipper fingers ready for action in this real-time, machine language game. Lots of sound and flashing graphics. There are five speeds so anyone can play. This version features the dreaded "Bermuda Square"!

Protected tape \$14.95
Protected disk \$20.95



INVADERS FROM SPACE

by Carl Miller from Acorn

"Maybe it's too fast!" Perferred by all the local arcade addicts, this machine language game has great sound. Alien Invasion, Invaders, and Invaders Plus just can't compete. You can adjust six parameters including the speed, if you think it's too fast. Only a few heroes will be able to save earth.

Protected tape \$14.95
Protected disk \$20.95



THE PROGRAM STORE
4200 Wisconsin Ave NW
P.O. Box 9609
Washington DC 20007



VISA AND
MASTERCARD

**TO ORDER
TOLL FREE
800-424-2738**

For program information call
(202) 337-4691

Mail orders: Send check or money order for total purchase price, plus \$1.00 for shipping & handling. Charge card customers, please include card number, expiration date, and your name as it appears on the card.

```

7020 PRINT:PRINT"LOG ADJUSTMENT":D=INT(F/100)
7030 FOR X=1TO48:IF L(D,X)=A THEN L(D,X)=1:GOTO7070
7040 NEXT X:D=D+1:IF (D*100)<G GOTO7030
7050 PRINT"RELOGGING":S=A(A+48):U=F:V=G:GOSUB9500
7060 PRINT"LOGGED":A(A+48)=S:A(A+48)=S:GOTO7100
7070 A(A+48)=A(A+48)+1
7080 L(D,0)=L(D,0)-A(A+24):GOTO7040
7100 D=INT(F/100):PRINT:PRINT"WORKING"
7110 FOR X=1TO48:IF L(D,X)=1 THEN L(D,X)=0
7120 NEXT D:D=D+1:IF (D*100)<G GOTO7110 ELSE 5000
7998 '
7999 REM *** COMPLETED LOG ***
8000 PRINT:INPUT"WHICH HOUR":H=INT(H/100):IF H+48<F OR H>2400 GO
    TO8000
8005 CLS:U=1:V=13:W=25:Z=37
8020 PRINTH+U;"=";L(Y,U),
8030 PRINTH+V;"=";L(Y,V),
8040 PRINTH+W;"=";L(Y,W),
8045 PRINTH+Z;"=";L(Y,Z)
8050 U=U+1:V=V+1:W=W+1:Z=Z+1
8055 IF U=5 OR V=9 PRINT
8060 IF U<13 GOTO8020
8070 PRINT:INPUT"CONTINUE (Y/N)":XS:IF ASC(XS)=78 GOTO5000
8080 H=H+100:Y=Y+1:IF H>G GOTO5000 ELSE 8005
8998 '
8999 REM ** TIME TO EVENT CONVERSION **
9000 PRINT:INPUT"ENTER BEGINNING TIME":U:IF U=0 RETURN
9020 INPUT"ENTER ENDING TIME":V
9030 D=INT(U/100)*100:U=(D+1)+(U-D)*.8
9040 E=INT(V/100)*100:V=(E+1)+(V-E)*.8
9050 U=INT(U+.01):V=INT(V+.01):IF U<F OR V<U OR V>G GOTO9090
9060 PRINT:PRINT"FIRST POSITION = ";U:PRINT"LAST POSITION = ";V
9070 PRINT:INPUT"CORRECT (Y/N)":XS:IF ASC(XS)=78 GOTO9000
9080 RETURN
9090 PRINT:PRINT"ERROR - REDO":GOTO9000
9398 '
9399 REM *** ACCOUNT ENTRY ***
9400 PRINT:INPUT"ACCOUNT #":A:IF A=0 RETURN
9401 IF A>124 AND A<201 GOTO9450 : REM ** TESTS ACCOUNT NUMBER
9402 IF A>224 AND A<301 GOTO9450 : REM ** IS ACTUALLY A CAROUSEL
9403 IF A>324 AND A<401 GOTO9450 : REM ** AND SLOT POSITION
9404 IF A<101 OR A>424 GOTO9450
9405 IF A(A)<>0 GOTO9460
9410 PRINT:INPUT"PRODUCT CODE .....":A(A):IF J=1 RETURN
9420 INPUT"SPOT LENGTH .....":A(A+24):IF J=2 RETURN
9430 INPUT"NUMBER SPOTS .....":A(A+48):RETURN
9450 PRINT"INCORRECT ENTRY - REDO":GOTO9400
9460 PRINT"NUMBER ALREADY IN USE":GOTO9400
9498 '
9499 REM *** LOGGING ***
9500 R=A(A+24):K=0:RESTORE:Z=0
9505 M=INT(A/100):C=N:IF C=1 GOTO9510
9507 C=INT(10/S):IF C<1 THEN C=1 : REM ** ESTABLISHES SPREAD
9510 H=INT(U/100)
9520 READ L:L=L+M-1:Z=Z+1:IF Z=B RESTORE:Z=0 : REM ** FILL CLUSTER
    S IN ORDER SPECIFIED
9530 D=H*100:IF D+LCU THEN H=H+1:GOTO9530
9540 IF D+L>V GOTO9510
9550 IF L>H+48 THEN H=H+1:GOTO9520
9560 IF L(H,L)<>0 GOTO9800 : REM ** DESIRED SPACE NOT EMPTY
9570 IF L(H,0)>R>Q THEN H=H+1:GOTO9530
9600 T=0:X=1 : REM ** NEXT LINES CHECK FOR PRODUCT CONFLICT
9610 IF M<3 THEN W=L(H,L+X):T=A(A+24)+T:IF A(A)=A(W) GOTO9800
9620 IF M<X<3 THEN X=X+1:GOTO9610
9630 X=1:IF M=1 GOTO9660
9640 W=L(H,L+X):T=A(W+24)+T:IF A(A)=A(W) GOTO9800
9650 IF X<M-1 THEN X=X+1:GOTO9640
9660 IF T>R>I GOTO9800 : REM ** CHECK CLUSTER LENGTH
9700 PRINTA;"LOGGED AT":D+L:K=0
9710 L(H,L)=A:L(H,0)=L(H,0)+R+S=S-1:IF S=0 RETURN
9720 H=H+C:GOTO9530 : REM ** NEXT ATTEMPTED HOUR
9800 K=K+1:IF K>O RETURN : REM ** NUMBER OF ATTEMPTS TO LOG
9810 H=H+1:GOTO9530

```

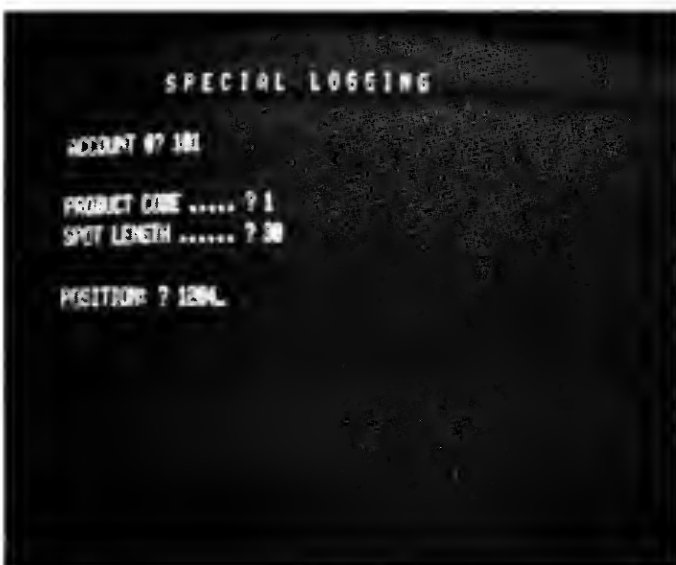


Photo 4. Special logging of an account that must be logged manually at a specific log position. In this case account 101 will be logged at position 1204.

CAROUSEL NUMBER 1			
ACCOUNT	CODE	LENGTH	SPOT
101	1	30	10
102	2	30	5
103	3	30	7
104	4	30	8
105	5	30	6
106	6	30	8
107	7	30	6
108	8	30	7
109	9	30	5
110	1	30	6
111	1	30	7
112	2	30	8

Photo 5. All account entries displayed before final logging for any corrections to the general account entries. It's too late to correct the specified time accounts as they are already logged.

time, remember). The computer immediately converts these to log positions. The computer will still have 48 positions per hour whether you are using all of them or not. As with most entries in this program, the computer will feed it back to you and give you the opportunity to reconsider.

Next comes a request for program minutes. If you have any commercial time within an hour that you won't log through the computer, you enter it so the computer will keep an accurate record of your total commercial time each hour. Simply enter the hour, then the minutes within that hour. When you're finished, enter a zero for the hour and the program will move on to the next segment. If you seldom approach the maximum commercial time you accept, you may wish to eliminate this section.

To help you in program modification, I have spaced the print-out between sections of the program and placed a heading on each.

The next section allows you to protect one or more specific log positions from being used by the computer. To protect the noon hour, fifth position, from any entry by the computer, enter 1205. You may protect as many positions as you wish; enter a zero when you're done. If you have little need for this section,

eliminate it. Conversely, you may wish to expand this section so that instead of protecting an individual log position it sets aside the entire cluster. To do this you might enter the first position of the cluster to be protected and change line 740 to that in Example 1.

740 L(X,Y) = 100:L(X,Y + 1) = 100:L(X,Y + 2) = 100:L(X,Y + 3) = 100:GOTO710

Example 1.

Beginning with the next section, enter your first account numbers. These always constitute a three-digit number with the first digit indicating the carousel (1-4) and the next two digits the slot within that carousel (01-24). A commercial loaded in carousel #2, slot 4, is entered as account 204.

You also have to supply pertinent data, such as the product code, commercial length and number of commercials, about each account. You must know which commercials have specific logging requirements such as time and product protection. This program gives product protection only within the cluster in which the account is logged.

If you wish to increase product protection beyond one cluster, you must modify lines 9620, 9630 and 9650 of the log-

UTILITY PACK

CPU: Compress Program Utility. Removes all unnecessary spaces and remarks from a Basic program, and will compress lines if specified. Complete regard for unclosed strings and unusual commands. Fast Z-80 speed! Level II or DOS. **\$19.95/\$21.95**

SEARCH: Lists any Basic program lines containing any occurrence you select. Break at any time to make changes, or continue. Option allows for LPRINTed listing. Written in Z-80! Level II or DOS. **\$19.95/\$21.95**

SPECIAL DOS OFFER: All of these utilities, on one diskette, can be purchased for just **\$49.95! THAT'S HALF PRICE!**

BTRACE: Makes the TRON command easier to utilize by placing the current line being executed in one convenient location. Preserves your screen display. Level II or DOS. Written in Z-80. **\$19.95/\$21.95**

CHANGES: Generates a screen or printed listing of differences between versions of programs you are developing. DOS only. **\$14.95/\$16.95**

REPLACE: Allows you to search and replace occurrences in your Basic programs (saved in ASCII format). DOS ONLY. **\$14.95/\$16.95**

SPECIAL LEVEL II OFFER: CPU, SEARCH, and BTRACE, together on one cassette, can be purchased for just **\$29.95 THAT'S HALF PRICE!**

NEWEST PRODUCTS!

Microsoft's Basic Compiler **\$175.00**
Apparat's NEWDOS-80 **149.00**
Six Micro Stories (disk) **19.95**
Local Call To Death (disk) **19.95**
Two Heads Of A Coin (disk) **19.95**

BOOKS

The Book, Vol. 1 **\$14.95**
Supermap **8.95**
Disk & Other Mysteries **19.95**
Disassembled Handbook, Vol. 1 **10.00**
Disassembled Handbook, Vol. 2 **15.00**
Inside Level II **15.95**

MEDIA

Nashua diskettes **\$24.95/10**
Verbatim diskettes **26.50/10**
C-10 Agfa cassettes (5 screw) **10.95/13**
Storage boxes **3.00/ 1**

BEST SELLING GAMES

MENTAL LAPSE — by Brandon Rigney III. A graphic lovers delight, with action to tax your abilities to the limit! **\$12.95/\$15.95**

JUNGLE — by Brandon Rigney III. Getting back to camp may not be as easy as you think! Six different levels of complexity make this a game for the entire family. **\$9.95/\$12.95**


CURTAINS — by Brandon Rigney III. A concentration game with several unique twists; great graphics, too! **\$9.95/\$12.95**

GOMOKU — by Peter Lewis. Can you beat the computer at this one? Similar to tic-tac-toe, only you need five in a row to win. The rules are simple, but there is a strategy! **\$9.95/\$12.95**

OTHELLO — by Jack Decker. An excellent implementation of the popular board game. One or two players, different skill levels. Option for keeping score thru the game. **\$9.95/\$12.95**

CRIBBAGE — by Richard Vossell. Plays by Hoyle. Fast response times. Guaranteed debugged. Excellent for learning (use the HELP function), or for the expert Satisfaction guaranteed! **\$16.95/\$19.95** (versions are different)

Specify Level II or DOS.

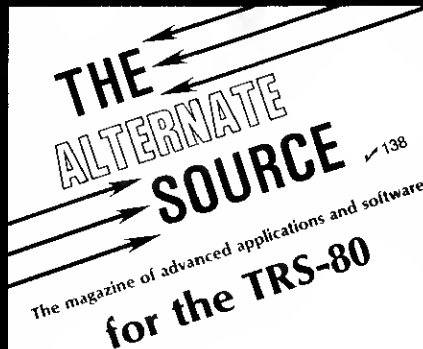

*Know what the three T's of computing are? Tips, Tutorials, and Techniques. That's what **The Alternate Source News** is all about. Teaching you to become a better programmer, both in Basic and Assembly Language. Published bi-monthly, six issues are just **\$9.00**.*

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

QUILL DRIVER & DVR

Quill Driver is an extremely versatile text for matter which includes several valuable 'extras'. QD will interface with alternate input files to allow user creation of form letters, yet with a personal touch. QD features over 30 commands to handle even the most difficult problem formats. QD has embedded machine language routines to provide speedy output. QD will allow output to be directed to screen, printer or disk files. QD text files may be Basic remark statements, EDTASM files, or EDIT80 files. Certain Pencil and Scripsit files are even compatible! Quill Driver comes with a driver (DVR) to allow lower-case/shifted-upper-case input, and features a simulated shift-lock! DVR allows lower case input even without a lower case mod, although it isn't visible on screen and also features a 'route-to-the-printer' control key function. The Quill Driver manual is extensive and very well written. Sample files are included. **\$39.95** complete.

DVR is available separately, with a relocating module to allow users to dump the program in a specified memory location, for **\$9.95** on cassette or **\$12.95** on diskette. LEVEL II and DOS versions on the same cassette

ABSOLUTELY FREE!

For every single item over \$15.00 that you order, select one of the **FREE** programs below! (Available separately for \$5.95 each)

SYSLOAD: A patch to DOS to allow /CMD file execution via the Basic SYSTEM command. By Jesse Bob Overholt.

RAMTEST: Level II or DOS. In Z-80 using reliable techniques. By Allan Moluf.

SUPERKEY: A graphics typewriter like you've never seen before! By Brandon Rigney III.

BILLBOARD: Generate posters for social occasions and friends. By Brandon Rigney III.

WORKING: Never have you seen a program work so hard and get so little done! By Bill Brown.

Also applies to other vendors products! See below.

KILLER: A DOS utility that allows you to KILL more than one file at a time! By Allan Moluf

PENRAM: A utility which allows RAM manipulation never before possible! By Roxton Baker.

FILEFIX: Direct statement in file? Fix it the easy way, with this short program! By Ken Edwards.

PERSONAL PAYABLES: A DOS personal finance management system, using random files. By Charles Butler.

CONVERT: Basic programs to Pencil files and back, Basic remark statements to either Pencil or EDTASM format and back. And more. By Bruce Hansen.

VERSATILE UTILITIES

OS/80 PATCH: Just released! A limitation of OS/80 (formerly known as Microdos) has been its lack of ability to handle machine language programs. With this utility, you can now save, load, copy, read as data and otherwise manipulate such programs. OS/80 is **\$29.95**. OS/80 PATCH is **\$14.95**.

COPYDISK: Allows you to copy one or several disk files at one time from DOS. Drive 0 does not have to contain a system diskette once program is loaded. Ideal for single drive owners, great for dual drive owners! **\$11.95/\$15.95**.

SPOOL80: Spool your output to disk, then use the PRINT command in DOS for maximum printer efficiency! Includes source code. **\$16.95** on diskette only.

DISKLIB: Allows you to automatically read diskette directories and store all entries in a master file. Will sort, edit or LPRINT in the format you desire. **\$9.95/\$12.95**

ORDER BLANK

☐ Ship U.P.S.

☐ Ship First Class Mail

Please send:

Name _____
Address _____
City _____
State, Zip _____

Shipping \$2.00
Total _____

Mail To: The Alternate Source
1806 Ada Street
Lansing, MI 48910

Master Charge/VISA
517-485-0344
517-487-3358

We will ship C.O.D.
(add \$1.25 please)

TRS-80 is a trademark of the Tandy Corporation

☐ Check here for FREE issue of The Alternate Source with any order.
☐ Enclosed is \$9.00 Begin my subscription with issue # _____

Michigan residents add 4% sales tax. Foreign, please send U.S. funds. Foreign orders welcome but please include additional postage.

AND LAST BUT NOT LEAST . . .

The Alternate Source distributes products from over 30 different vendors. Call or write for products that you desire.

- | | | |
|-------------------------|---------------------|----------------------|
| • Automated Simulations | • Instant Software | • International Data |
| • Racet Computers | • Microsoft | • Mumford Micro |
| • MISOSYS | • Apparat | • IJG International |
| • Fuller Software | • Collage Software | • SubLogic |
| • Richcraft Engineering | • Percom | • 80 U.S. |
| • Webb Products | • Meta Technologies | • And others . . . |
| • ABS Suppliers | • Acorn Software | |

When placing your order, feel free to include any product from the above companies. We appreciate the opportunity to service your software needs!

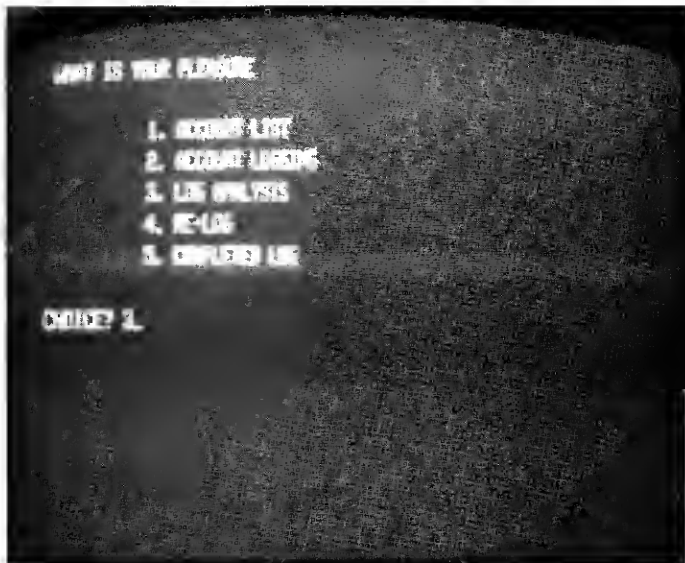


Photo 6. Logging completed, you can now choose the displays as you need them.

ging subroutine. This program thinks in terms of log position only, never time.

The product code identifies the product type being promoted to avoid conflicts within the same cluster. The product code

is always numeric, never alphanumeric. Any number of product codes may be used; however, the more is not the merrier... it becomes confusing. Thirty numbers or less should provide sufficient categories for most

stations; we use 14. Your experience in your own station should dictate how many are best for you.

All commercial length must be entered in seconds. If the same account is running more than one length commercial, you must load each as a separate account. Remember, the account number really only identifies a specific cartridge playing in a carousel. It is not good scheduling to have commercials of differing length on the same cartridge, even for the same client, since one miscue can throw the whole rotation off.

Generally, entering a zero exits you from most routines. If you attempt in this section to place on account in a space already filled, the computer asks permission before removing it. The program generally is built around double checks such as this to avoid simple entry errors that can wreck a log.

Computer Logging of Accounts

The "specified times" section

is only for accounts that must be logged within specified time periods, as opposed to the previous section where the account had to be aired at a specific time. Any number of time periods can be required for any one account, but one time period for one account must be finished before you proceed to the next.

The computer will guide you step by step through this section by asking you the beginning and ending of one time period and the number of commercials for that client to be logged within that period. The time period will be converted to log positions, and the computer will still have 48 positions per hour, even if you "locked out" some or most of these positions.

When you have entered all accounts that must be logged within specific time periods, enter a zero for the next account number. If a particular time period becomes crowded, you can run out of log positions for individual carousels within that

RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes —

MOD II UTILITY PACKAGE

Replacement Debug (DEBUG)

35 basic functions + 8 edit commands! Single step or Multiple step. Automatic trace of logic flow with printing of trace, trace of instructions greater than stack pointer values, and rapid trace. Subroutine calling. Automatic program looping. Dynamic disassembly of instructions!!!

Directory Catalog System (XDIR)

Build directory of directories!! Sorts by disk or by program. Abbreviated or full form — full form includes dates of creation and last update, and other directory data.

Wild card select options with masks. Build consolidated directory of all GL#?/BAS files. Select on filename and extension. Save or load XDIR catalog files. Concatenate new data with loaded file.

Extended Copy (XCOPY)

Copies multiple files with a single command using masked select options! Source disk may be non-operating system disk. Single drive capability. Recover bad files — invalid sectors itemized but copy continues.

Merge files with or without replacement.

Superzap (SZAP)

Display or print and modify standard TRSDOS diskette track and sector data. Full screen edit mode. Automatic repeat scan and print. Copy disk sectors — any number of sectors to same or other drive.

Directory Fix (DFIX)

Automatic repair of HIT tables! List and flag directory errors.

Disk Identification (DISKID) Change diskette names!

Extended Create (XCREATE) Creates and initializes file to end.

DOCUMENTATION

Complete documentation of above utilities including a full discussion on recovery of lost data on diskettes!!!

Mod II Utility Package \$150 Manual only \$20 refundable

DEALER INQUIRIES INVITED

WHEN ORDERING PLEASE
ADVISE PUBLICATION SOURCE

Telephone Orders Accepted (714) 637-5016

TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORPORATION

CHECK, VISA, M/C, C.O.D.
Calif. Residents add 6%

RACET COMPUTES
702 Palmdale, Orange, CA 92665

MOD II BASIC CROSS REFERENCE UTILITY

SEEK and FIND functions for:

Variables, Line Numbers, Strings, Keywords
'All' options available for line numbers and variables.
Load from BASIC - Call with <CTRL> R
Output to screen or printer.

BASIC CROSS REFERENCE UTILITY \$50

INFINITE BASIC for MOD I TRS-80™ Tape and Disk System

Extensions to Level II and Disk BASIC \$49.95

Full MATRIX functions — 30 BASIC commands!

50 more STRING functions as BASIC commands!

Includes RACET in-memory sorts. Load only functions you want — where you want in memory! More than you expect!

∞ BUSINESS (Requires Infinite BASIC) \$29.95

Automatic printer pagination. Packed decimal arithmetic - 127 digit accuracy. Binary array searches. Hash code.

COMPROC Command Processor for Disk Systems \$19.95

Auto your disk to perform any sequence of commands.

GSF (Specify 16, 32 or 48K Memory) \$24.95

18 machine language routines including RACET sorts.

DISK SORT MERGE (DSM) for MOD I and MOD II

Random file disk sort merge — multi-diskette files. All machine language stand alone package. Sort on up to 15 fields — ascending or descending. Provides optional output field deletion, rearrangement, and padding. Sort an 85K diskette in less than 3 minutes!

DSM for Mod I (Minimum 32K, 2-drives) \$75 on Disk

DSM for Mod II (Minimum 64K, 1 drive) \$150 on Disk

Mod II Development Package \$100

Machine language Superzap — Editor Assembler, Disassembler Patches.

Mod II Generalized Subroutine Facility \$50

Sort 1000 elements in 6 seconds!

✓ 41

Now... available for
TRS-80 Line Printer III.




When you don't have a stand to sit on.

Trimm's universal printer stand can get you up and running for just \$94.95. Our stand is as rugged as they come and as attractive as you want. It has a large chrome rear-mounted paper basket, plastic cushioned leveler feet and textured black baked enamel finish.

Take delivery within days of your order. Trimm ships immediately.

The Trimm stand comes packaged and ready for immediate assembly and mounting of your printer. Please specify your printer model when ordering.

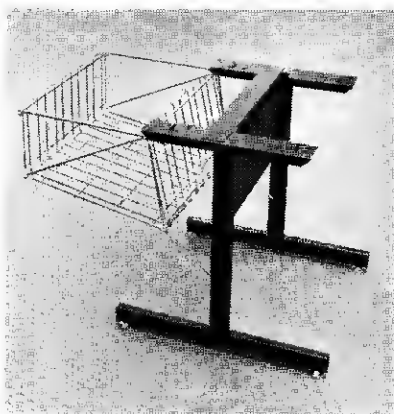

\$94.95 (or less, when you want more.
Distributor inquiries invited.)

Trimm stand fits:
TRS-80 Line Printer III
DEC LA34
Most Centronics 700 series
Texas Instruments 810-820
NEC Spinwriter series
Okidata Slimline series
Lear Siegler 300
Diablo 1600 & 2300 series

TRIMM
Enclosure Products

✓ 385

Computer and Peripheral Desks,
Tables, Vertical Enclosures, Printer
Stands, Accessories.

Trimm Enclosure Products 11939 Sherman Road, No. Hollywood, CA (213) 982-0400

This Weekend: STIK IT.... ..to your

That's right! Esmark's VIDIET-STIK light pen has the TRS-80 CONNECTION for LEVEL I & II. Your 4K to 48K TRS-80 System will come alive under your VIDIET-STIK within minutes of its arrival. That's because there are no wires to solder or traces to cut. You're up and running as fast as you can plug the interface into your system's cassette EAR-jack. CLOAD our custom LIGHT-WAVE demonstration software and RUN. And because the interface has a plug for your recorder, you won't have to unplug it again when loading your other software tapes. The interface allows them to pass right thru whenever you're not using the pen. It's exclusive "switched tip" design means the pen's electrically isolated from your system when it's not in use. Just point & press! It's that simple. Plug, CLOAD and RUN. And have we got the software for you to RUN with! Our demonstration tape includes a calibration program (used to adjust the CRT's brightness and contrast) plus STIK-TAC-TOE, AWARI and TOWERS. Two challenging games and a puzzle that will keep grownups and children Stiking it to your TRS-80 for hours. And there are instructions provided so you can begin writing your own light pen programs (lightware) for fun or profit (Level II). Or, just sit back and enjoy our LIGHT-WAVE tapes each month. Esmark's unmatched commitment to lightware can bring you up to five new games, puzzles, drills & educational quizzes or simulations each month. Our current LIGHT-WAVE releases are:

LIGHT-PAK 2 — LIGHTPEG (4 peg-jump puzzles)
(LEVEL II) ENDRUN (Othello with a twist)
LIFE9 (Conway's LIFE with mutations)
Price: \$19.95 (including postage & handling)
LIGHT-PAK 3 — LITEGAMMON (Backgammon you'll Stik with)
(LEVEL II) STIKWUMPUS (Caves with a little 'lite')
MAZEMASTER (Maze after maze to poke thru)
PRICE \$19.95 (including postage & handling)

Order yours now and we'll include a free copy of FLASHBACK. Esmark's newsletter dedicated to the latest news in lightware applications. And, don't forget to tell your friends. The VIDIET-STIK can also be ordered for use on most other micro systems using the following processor chips:

8080 Z80 6800 6502

All that's required is a standard cassette jack leading to Ground and a readable single bit input port. Driver software is provided along with instructions for writing lightware applications. And tell your local Dealer that Esmark's got a Dealer package he won't want to miss out on. Delivery is 3 to 6 weeks from receipt of your order. C.O.D.'s are \$3.00 extra but will be shipped within two weeks. All prices are F.O.B. Mishawaka, Indiana. Indiana residents add 4% state sales tax.

ALSO COMING FROM ESMARK:

- [] TRS-80 Printer Interface (Cassette AUX-jack interface for all RS232 printers. Includes LLIST & LPRINT software)
- [] TRS-80 RS232 Communications Interface (Makes your TRS-80 a full I/O terminal to timesharing systems the world over. Gives you intelligent or dumb terminal capabilities at 110 or 300 BAUD. Also includes Printer Interface above with 20 mA current loop & TTL level I/O options.)

— TRS-80 is a trademark of the Tandy Corporation —



ESMARK[★] INCORPORATED

507 1/2 E. MCKINLEY HWY. MISHAWAKA, IN 46544
(219) 255-3035

\$62.95

PLUS \$1.50
POSTAGE &
HANDLING

*ELECTRONIC SYSTEMS MARKETING

TRS-80

VIDIET • STIK[™]
ESMARK INC. MISHAWAKA, IN 46544

period. The computer informs you of the lack of available positions within that period with a query if other periods are available. If you can expand the time period for that account to include even one more cluster, answer "yes," and you will be given the opportunity to do so.

All remaining accounts will be entered under "general accounts." Everything entered in this section spreads throughout the broadcast day on a more-or-less even basis. The major difference in this routine and previous ones is that you were asked immediately if the entry was correct; now you conclude all entries before you get a chance for corrections. The reason for this is that in all routines prior to this the accounts were actually logged as you fed them into the computer. All remaining accounts are logged as a group.

When you have entered the last account, enter a zero. All the accounts are now displayed for you for individual correction. All accounts entered under the "specified" routines show a zero for number of spots. This means they are logged and don't need corrections.

To correct an entry, state "no"—the entries as they stand are not correct. Enter the account number of the incorrect entry, and you get an opportunity to reenter all the data. The

display then begins again at that account. Once you verify that all entries are correct, the final logging process begins. It should conclude in a matter of minutes.

During the logging process you get "comfort" displays of what the computer is doing to assure that it is doing something.

This is important in initial runs or after modifications to see if some program error has caused you to "hang up." If entered correctly, the program cannot hang up during the logging process. During logging the display informs you which carousel is being logged and where each account is being placed. The computer does not require your attention during this process.

At the conclusion of the logging process you get a choice of five displays:

Account List
Account Logging
Log Analysis
Re-log
Completed Log

Account List merely displays each account number and any commercials that can't be logged. If any were not logged, you might be oversold for the commercial minutes you allowed, or had more of one product code than you had clusters.

Account Logging shows you where any account you select is

ACCOUNT	LOGGED
113	0
114	0
115	0
116	0
117	0
118	0
119	0
120	0
121	0
122	0
123	0
124	0

CONTINUE ? Y

Photo 7. Account List display indicates that all accounts in this carousel are logged.

logged. This is good for spot-checking the spread of the general accounts or that a specified time account is logged within the time periods specified.

Log Analysis merely displays the total commercial minutes logged within each hour of the broadcast day. If you declared any minutes at the beginning of the program not logged through the computer, these would be included in this display.

The Re-log program is your opportunity to tell the computer you do not like the log positions selected for any given account and to do that account over again with new positions. You cannot specify the time periods of a re-logged account. If you tell the computer to re-log an account you logged within specified time periods, the computer will warn you and give you an opportunity to reconsider. If you continue, that account may be placed anywhere on the log where vacancies occur. You may re-log an account any number of times.

The final display, Completed Log, shows you one hour of the log at a time beginning with the hour you specify. If you specify an hour before sign-on or after sign-off, your request is ignored. The display moves in sequence through each hour as long as you tell it to continue until it reaches sign-off. If you wish to

look only at a specific hour and return to the menu, you may.

Each log position (1-48) for the hour is shown with the account number logged at that position. Where no account is logged a zero is displayed. We tried the display with simply a blank space when no account was logged; but for some reason, our logger found it easier to copy with the zeros present.

Program Embellishments

Naturally there are error traps throughout the program to catch the most obvious entry errors. I don't claim perfection, just reasonable performance.

Remarks spaced throughout the program aid you in understanding points that are most likely candidates for modification of confusion. I added these remarks specifically for this article, they are not a part of our running program. You will have memory available for many more routines if you eliminate these remarks from your running program.

The account arrays for product codes, length and number of commercials are identified for you in lines 9410-9430.

For 24-hour stations, the computer must have a sign-on and sign-off time. Enter 100 for sign-on, 2500 for sign-off.

If you have sign-on and sign-off times that never vary, you

HOUR	MINUTES	HOUR	MINUTES
1:00	0	13:00	9
2:00	0	14:00	8.5
3:00	0	15:00	8.5
4:00	0	16:00	8.5
5:00	0	17:00	8.5
6:00	0.5	18:00	8
7:00	0.5	19:00	7.5
8:00	0.5	20:00	7
9:00	0.5	21:00	6.5
10:00	0.5	22:00	6
11:00	0.5	23:00	5.5
12:00	0.5	24:00	5

CONTINUE ?

Photo 8. The commercial time logged in each hour of the broadcast day including any minutes declared at the beginning of the program.

THE LOWEST

prices on this high-quality software. Buy direct and save 50%. Now, also available for CBASIC on CP/M and MBASIC on HEATH HDOS.

DATA BASE MANAGER

Mod-I \$69 Mod-II \$199

You can use it to maintain a data base & produce reports without any user programming. Define file parameters & report formats on-line. Key random access, fast multi-key sort, field arith., label, audit log. No time-consuming overlays. 500 happy users in a year. Mod-II version with over 50 enhancements.

A/R

Mod-I \$69 Mod-II \$149

Invoices, statements, aging, sales analysis, credit checking, form input, order entry. As opposed to most other A/R, ours can be used by doctors, store managers, etc.

WORD PROCESSOR

Mod-I \$49 Mod-II \$49

Center, justification, page numbering...Used for letters, manuals, and reports. Mod-I version features upper/lower case without hardware change!

MAILING LIST

Mod-I \$59 Mod-II \$99

The best! Compare and be selective. Form input, 5-digit selection code, zip code ext., sort any field, multiple labels. Who else offers a report writer?

INVENTORY

Mod-I \$99 Mod-II \$149

Fast, key random access. Reports include order info, performance summary, E.O.Q., and user-specified reports. Many converted their inventory to ours!

PAYROLL, A/R, A/P, and GL available for the Mod-II DOS and CP/M.

L216, a cassette package of 10 business programs for Level II 16K systems, \$59.

All programs are on-line, interactive, random access, virtually bug free, documented and delivered on disks. Mod-I programs require 32K TRSDOS, and credit is allowed when you upgrade to Mod-II. We challenge all software vendors to offer low cost manuals so you can compare and avoid those high-priced, undocumented, 'on-memory' programs. Manuals alone \$5 for Mod-I, \$10 for Mod-II. Don't let our low prices fool you!

Mod-II programs are extensively modified, guaranteed to run with 1 year newsletter and updates. 10% off for ordering more than 1 Mod-II program.

MICRO ARCHITECT, INC., 54

96 Dothan St., Arlington, MA 02174

TRS-80 is a registered trademark of TANDY CORP.

SYSTEM EXPANSION

FOR THE TRS-80™

AT \$69.95 [PC BOARD & USER MANUAL]

- SERIAL RS232C/20 mA I/O
- FLOPPY CONTROLLER
- 32K BYTES MEMORY
- PARALLEL PRINTER PORT
- DUAL CASSETTE PORT
- REAL-TIME CLOCK
- SCREEN PRINTER BUS
- ONBOARD POWER SUPPLY
- SOFTWARE COMPATIBLE
- SOLDER MASK, SILK SCREEN

LNW RESEARCH

8 Hollowglen St. Irvine CA 92714
714-552-8946

TO ORDER
P.O. Box 16216 Irvine CA 92713
Add \$3 for postage and handling.
CA residents add 6% sales tax

Card No. _____ Expiration Date _____ Signature _____

may prefer to eliminate the first section altogether and just enter a line in the program that sets F (sign-on) to your first log position and G (sign-off) to your

last log position. A good line is 170. I used this to establish a basic parameter to give the subroutine a place to start. You can then simply eliminate lines

200-220.

On the same order, if you have the same commercial minutes to declare during the same hours over a long period of time you can include some lines between 500 and 510 that automatically declare these commercial minutes without your having to enter them.

You can handle protected positions the same way in lines 700-760 if you have certain positions within an hour on every log. I suggest you place your line between 700 and 710. In each case, simply remember to use the L array and the first figure for the hour, the second figure for the log position within the hour. In keeping track of the commercial minutes for each hour, we use log position zero since it is a valid array but not a valid actual log position.

Similarly, in the "special logging" section you can add a fixed line for fixed events on every log. We use such a feature to automatically log all of our weather, headlines and news-

casts. During periods of automation we also use it for scheduling our announce carts, jingles and station promos.

A further word about the sign-on/sign-off conversion to log position and within the specified time routine. These assume the clusters are spread evenly around the hour. If your clusters do not, you will be forced to rewrite the time-to-event subroutine in lines 9000-9070. Don't bother. Simply change the entire routine so that instead of entering the times you actually enter the log positions. The computer operator can simply have a time wheel in front of the operating position with the clusters clearly outlined as to their occurrence within each hour. This also provides more flexibility in changing your format, or if you use a variety of formats on differing hours.

As for the rest of the program, I am sure you will have little difficulty figuring out what I did, using your list of variables supplied at the beginning. ■

701 = 181	713 = 0	725 = 182	737 = 1
702 = 282	714 = 0	726 = 281	738 = 1
703 = 383	715 = 0	727 = 383	739 = 1
704 = 484	716 = 0	728 = 485	740 = 1
705 = 0	717 = 183	729 = 0	741 = 187
706 = 0	718 = 284	730 = 0	742 = 286
707 = 0	719 = 385	731 = 0	743 = 386
708 = 0	720 = 481	732 = 0	744 = 0
709 = 189	721 = 0	733 = 182	745 = 0
710 = 0	722 = 0	734 = 0	746 = 0
711 = 0	723 = 0	735 = 0	747 = 0
712 = 0	724 = 0	736 = 0	748 = 0

CONTINUE (PAGE 2)

Photo 9. Sample log page. This is the 7 AM log. Note 12 clusters with four events in each, 48 events total. The events do not describe the broadcast time but represent only the commercial position within an hour. Commercial positions are determined by your programming.

LYNX makes your TRS-80 a whole new animal.

LYNX isn't just a telephone coupler.

LYNX is a one-piece total telephone linkage system for TRS-80 Level I and II computers. It contains all the functions you need to tap The Source. Engage your business computer. Play games with a computer friend. Or do nearly anything you wish.

Best of all... LYNX costs only \$239.95*. A mere fraction of what you used to have to pay for equipment to do the same job.

LYNX. To get your paws on one, call or write:

ESI EMTROL SYSTEMS, INC. ✓ 278

1262 LOOP ROAD LANCASTER, PENNSYLVANIA 17601
Phone 717/291-1116

VISA or Master Card Welcome



*Add \$2.50 for shipping and handling.
PA residents add 6% sales tax.
Includes "terminal" program on cassette, instruction manual



*TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

PROGRAMMING TOOLS FOR YOUR TRS-80™

INSIDE LEVEL II

The Programmers Guide to The Level II ROMS

INSIDE LEVEL II is a comprehensive reference guide to the Level II ROMs which allows the machine language or Basic programmer to easily utilize the sophisticated routines they contain. Concisely explains set-ups, calling sequences, and variable passage for number conversion, arithmetic operations, and mathematical functions, as well as keyboard, tape, and video routines. Part II presents an entirely new composite program structure which loads under the SYSTEM command and executes in both Basic and machine code with the speed and efficiency of a compiler. In addition, the 18 chapters include a large body of other information useful to the programmer including tape formats, RAM usage, relocation of Basic programs, USR call expansion, creating SYSTEM tapes of your own programs, interfacing of Basic variables directly with machine code, a method of greatly increasing the speed at which data elements are stored on tape, and special precautions for disk systems. INSIDE LEVEL II is a clearly organized reference manual. It is fully typeset and packed with nothing but useful information. It does not contain questions and answers, ROM dumps, or cartoons. INSIDE LEVEL II.....\$15.95

PROGRAM INDEX FOR DISK BASIC

Assemble an alphabetized index of your entire program library from disk directories. Program names and free space are read automatically (need not be typed in) and may be alphabetized with a fast Shell/Metzner sort by disk or program. The list may also be searched for any disk, program, or extension; disks or programs added or deleted; and the whole list or any part sent to the printer. Finally, the list itself may be stored on disk for future access and update. "The best thing since sliced bread" (January issue of '80 Microcomputing). One drive and 32K required. INDEX.....\$19.95

SINGLE STEP THROUGH RAM OR ROM WITH STEP80

STEP80 allows you to step through any Basic or machine language program one instruction at a time, and see the address, hexadecimal value, Zilog mnemonic, register contents, and step count for each instruction. The top 14 lines of the video screen are left unaltered so that the "target program" may perform its display functions unobstructed. STEP80 will follow program flow right into the ROMs, and is an invaluable aid in learning how the ROM routines function. Commands include step (trace), disassemble, run in step mode at variable step rate, display or alter memory or CPU registers, jump to memory location, execute a CALL, set breakpoints in RAM or ROM, and relocate to any page in RAM. The display may also be routed to your line printer through the device control block so custom print drivers are automatically supported. STEP80.....\$16.95

MACHINE LANGUAGE FAST FOURIER TRANSFORM

This complete package includes 3 versions of the machine language FFTASM routine assembled for 16, 32, and 48K machines, a short sample Basic program to access them, a 10K Basic program which includes sophisticated interactive graphing and data manipulation, and a manual of instructions and examples. The machine language subroutines use variables defined by a supporting Basic program to make data entry and retrieval extremely fast and easy for custom implementation. They perform 20 to 40 times faster than their Basic equivalent (256 points in 12.5 seconds), and require less than 1550 bytes of memory. FFTASM.....\$49.95

4 SPEED OPTIONS FOR YOUR TRS-80!

The SK-2 is the most versatile clock modification available for the TRS-80. Speeds may be switched between normal, an increase of 50%, or a 50% reduction; selectable at any time without interrupting execution or crashing the program. Instructions are also given for a 100% increase to 3.54 MHz, though the TRS-80 is not reliable at this speed. The SK-2 may be configured by the user to change speed with a toggle switch or on software command. It will automatically return to normal speed any time a disk is active, requires no change to the operating system, and has provisions for adding an LED to indicate when the computer is not at normal speed. It mounts inside the keyboard unit with only 4 necessary connections for the switch option (switch not included), and is easily removed if the computer ever needs service. The SK-2 comes fully assembled with socketed IC's and illustrated instructions. SK-2.....\$24.95

RAM SPOOLER FOR PARALLEL OR SERIAL PRINTERS

This program is a full feature print formatting package featuring user definable line and page length (with line feeds inserted between words or after punctuation), screen dump, and printer pause control. The serial version allows baud rate selection from the keyboard. In addition, printing is done from a 4K expandable buffer area so that the LPRINT or LLIST command returns control to the user while printing is being done. Ideal for Selectric or other slow printers. Allows printing and processing to run concurrently. Please specify PARALLEL or SERIAL (RS-232 interface) version. SPOOLER.....\$16.95

DUPLICATE SYSTEM TAPES WITH "CLONE"

Make duplicate copies of ANY tape written for Level II. They may be SYSTEM tapes (continuous or not) or data lists. The file name, load address, entry point, and every byte (in ASCII format) are displayed on the video screen. CLONE.....\$16.95

RAM TEST FOR LEVEL II

This machine language program is a very thorough test for several types of RAM errors. A complete test of each individual bit in a 48K machine takes just 14 seconds. Includes a separate test for power line glitches. RAMTEST.....\$9.95

FOR THE MODEL II

LYNC

from Midnight Software

High level data communications for Model IIs with CP/M. LYNC will send and receive any file with automatic error checking and retries. Either end may initiate transfers, and multiple files may be sent with wildcard filenames and direct or indirect listing. Remote or local directories may be called from within the program. Features full protocol, non-protocol file transfer, and real-time conversation modes. May be used over phone lines at 300 baud or direct to another computer at up to 9600 baud. Also available for other CP/M computers. LYNC.....\$95.00

**MUMFORD
MICRO
SYSTEMS**

✓144

ORDERING: Complete satisfaction is guaranteed or a full refund will be made. All programs are shipped on cassette unless \$5 is included for a formatted (no system) disk. Include \$1 postage and handling. California residents add 6% sales tax. Visa, Mastercharge and COD orders accepted.

Box 435-E Summerland, California 93067 (805) 969-4557

Use this program to keep track of your tapes.

Tape Librarian

Raymond J. Herold
8363 Shady Grove Drive
Manassas, VA 22110

Computer tape libraries are born in a black hole of chaos.

You start your collection simply, with perhaps a Radio Shack Blackjack/Backgammon tape. Then, you buy a few programs from ISI. Once you learn the ropes, you write some of your own. Other tapes come to you from friends and neighbors. Before you know it, you've

begged, borrowed, bought or stolen several dozen tapes—and they're laying around in disarray.

Some tapes probably don't have labels. Others probably have several programs back-to-back. Where's the data file you were working on last month? Sound familiar? You need help. You need a tape library management system.

Little Maintenance

Tape management systems range in complexity from the

hand-entered log records of control clerks to sophisticated on-line cataloging modules. The one I describe here is specifically for the microcomputer owner. Fifteen minutes of file maintenance every several weeks will index all of your programs and data files.

The system stores up to 48 tape entries on a TRS-80 Level II

with 16K and allows up to five file entries for each tape. You can index up to 240 programs and files.

The information stored for each tape consists of its number, its name and a description. Data stored for each file comprises its name, date created, type of file and tape counter position.

TAPE MANAGEMENT SYSTEM

-- MENU --

- 1 - LIST FILE ENTRIES
- 2 - ADD TAPE # ENTRY(S) TO FILE
- 3 - UPDATE SELECTED TAPE #
- 4 - DELETE TAPE # ENTRY(S)
- 5 - LIST FILE ENTRIES ON LINE PRINTER
- 6 - SAVE FILE ON CASSETTE

ENTER FUNCTION? *

Fig. 1. Options available once a TLMS file is established.

FILE ENTRIES

1 GAME #1	7 LEVEL1	13 ADVENTURES	19 DNSBKUP
2 EDTASH	8 MORTGAGE	14 DATAMAN	20 GAMES #4
3 PROGCONV	9 HOMEAPPL	15 GAMES #3	21 SARGON
4 STARTREK	10 ISI GAMES	16 TAPMCT	22 CROSSREF
5 MICROCHESS	11 TUTOR1	17 TAPMCTFILE	23 LOADMOD
6 GAMES #2	12 TUTOR2	18 PRINTMOD	24 RENUM

-- OPTIONS --

- 1 - LIST MORE ENTRIES
 - 2 - LIST DATA FOR SPECIFIC ENTRY.
 - 3 - RETURN TO MENU
- ? *

Fig. 2. Tape Numbers and Names.

Program Listing. Tape Library Management System.

```

10 CLEAR0: CLEAR MEM-4670
20 DIM NU(48), NMS(48), DES(48), FS(48,5), DS(48,5), TS(48,5), CS(48,5)
25 FOR Z=1 TO 7: READ PLS(Z): NEXT Z
40 CLS: PRINT: PRINT "DO YOU WISH TO CREATE A NEW TAPE MANAGEMENT DATA FILE"
50 PRINT "OR LIST/UPDATE AN EXISTING ONE?": PRINT: INPUT "REPLY: NEW OR OLD": AS
60 IF LEFT$(AS,1) = "N" THEN SU=1: GOSUB 1000: GOTO 100
70 IF LEFT$(AS,1) = "O" THEN GOSUB 8000: GOTO 100
80 GOTO 40
100 CLS: PRINT: PRINT TAB(15) "TAPE MANAGEMENT SYSTEM": F=0
110 PRINT: PRINT TAB(5) "-- MENU --": PRINT
120 PRINT "1 - LIST FILE ENTRIES"
130 PRINT "2 - ADD TAPE # ENTRY(S) TO FILE"
140 PRINT "3 - UPDATE SELECTED TAPE #"
150 PRINT "4 - DELETE TAPE # ENTRY(S)"
170 PRINT "5 - LIST FILE ENTRIES ON LINE PRINTER"
180 PRINT "6 - SAVE FILE ON CASSETTE"
190 PRINT: INPUT "ENTER FUNCTION": F
195 ON F GOSUB 2000, 1000, 3000, 4000, 6000, 7000: GOTO 100
1000 ' ADD TAPE
1005 IF SW<>1 THEN 8000
1010 CLS
1020 PRINT TAB(3) "-- TAPE INFORMATION --": PRINT
1030 PRINT PLS(1): PRINT PLS(2): PRINT PLS(3): PRINT: PRINT
1040 PRINT STRING$(63, "-"): PRINT TAB(3) "-- FILE INFORMATION --"
1050 PRINT: PRINT PLS(4): PRINT PLS(5): PRINT PLS(6): PRINT PLS(7)
1160 FOR A=1 TO 4: PRINT@147, " * "; FOR B=1 TO 100: NEXT B: PRINT@147, " * "; FOR B=1 TO 100: NEXT B: NEXT A
1200 Y=0: PRINT@145, " * "; INPUT X
1203 IF X<1 OR X>48 THEN PRINT@192, PLS(2): PRINT@145, " * "; GOTO 1200
1205 IF NU(X)>0 OR LEN(NMS(X))>0 THEN PRINT@192, PLS(2): PRINT@150, " * TAPE # "; NU(X): "ALREADY ON FILE * * *": FOR Z=1 TO 8000: NEXT Z: PRINT@145, STRING$(42, " * "); GOTO 1200
1207 NU(X)=X
1210 PRINT@192, PLS(2): INPUT NMS(X)
1215 IF LEN(NMS(X))>10 THEN PRINT@218, STRING$(15, " * "); PRINT@256, PLS(3): GOTO 1210
1230 PRINT@256, PLS(3): INPUT DES(X)
1235 IF LEN(DES(X))>24 THEN PRINT@290, STRING$(31, " * "); G

```

WE WILL NOT BE UNDERSOLD

16K MEMORY UPGRADE KITS

for TRS-80*, Apple II, Sorcerer (specify)

\$54

PRINTERS

NEC Spinwriter

Letter Quality High Speed Printer

Includes TRS-80* interface software, quick change print fonts, 55 cps, bidirectional, high resolution plotting, graphing, proportional spacing

\$2689

With Tractor Feed

\$2889

DIABLO 1650

R.O. \$2890

KSR \$3285

779 CENTRONICS TRACTOR FEED PRINTER

\$969

Same as Radio Shack line printer I

737 CENTRONICS FRICTION & PIN FEED PRINTER

\$839

9 x 7 matrix

730 CENTRONICS FRICTION & PIN FEED PRINTER

\$639

7 x 7 matrix Same as Radio Shack line printer II

P1 CENTRONICS PRINTER

\$269

Same as Radio Shack quick printer

PAPER TIGER (IP440)

\$939

Includes 2K buffer and graphics option

TI-810 Faster than Radio Shack line printer III

Parallel and serial w/TRS-80* interface software

\$1575

with upper and lower case and paper tray

\$1665

OKI DATA Microline 80 Friction and pin feed

\$559

Tractor Feed, friction, and pin feed

\$679

EATON LRC 7000 + 64 columns. plain paper

\$349

ANADIX DP-9500

\$1389


CAT MODEM Originate and answer same as

\$148

Radio Shack Telephone Interface II

LEEDEX MONITOR Video 100

\$129



DISK DRIVES

\$314

More capacity than Radio Shack 35 Track (80 K Bytes) drives. Fully assembled and tested. Ready to plug-in and run the moment you receive it. Can be intermixed with each other and Radio Shack drive on same cable. TRS-80* compatible silver enclosure.

90 DAY WARRANTY. ONE YEAR ON POWER SUPPLY.

FOR TRS-80*

CCI-100 5 1/4", 40 Track (102K Bytes) for Model I

\$314

CCI-200 5 1/4", 77 Track (197K Bytes) for Model I

\$549

CCI-800 8" Drive for Model II (1/2 Meg Bytes)

\$795

For Zenith Z89

CCI-189 5 1/4", 40 Track (102K Bytes) add-on drive

\$394

Z-87 Dual 5 1/4" add-on drive system

\$995

DISKETTES — Box of 10 (5 1/4") — with plastic library case

\$24.95

8" double density for Model II (box of 10)

\$36.49

COMPLETE SYSTEMS

TRS-80* LEVEL II-16K with keypad

\$719

TRS-80* Expansion Interface

\$269

ZENITH Z89, 48K all-in-one computer

\$2595

ZENITH Z19

\$740

TELEVIDEO

912B \$745

920B \$769

ATARI 400 \$489

ATARI 800 \$799

TI 99/4 \$894

MATTEL INTELLIVISION

\$249

NORTH STAR Horizon 1

32K, Double Density

\$2129

DISK OPERATING SYSTEMS

PATCHPAK #4 by Percom Data

\$ 8.95

CP/M for Model I, Zenith \$145

• for Model II, Altos \$169.00

NEWDOS Plus — with over 200 modifications

35track \$ 89.00

and corrections to TRS-DOS

40 or 70 Track \$ 99.00

SOFTWARE FOR THE TRS-80*

Software /Manual
w/Manual /Manual

CC-INVESTMENT PORTFOLIO MANAGER: This is what investors have been waiting for! This powerful program was developed by security analysts working with software designers. It comes on one cassette — 16K LEVEL II BASIC on one side, 32K DISK BASIC on the other. Store and report data. Review your portfolio. Produce detailed status, value, gain, and security analysis. Compare alternatives. **\$49.95/\$10**

INTELLIGENT TERMINAL SYSTEM ST-80-III BY LANCE MIKLUS: Enables a TRS-80* to act as a dial-up terminal on any standard time sharing network. Provides a TRS-80* with control key, ESC key, Repeat Key, Run Out Key, Break Key, full upper and lower case support, selectable printer output and program selectable transmission rates. **\$139/\$10**

CCA-DATA MANAGEMENT SYSTEM: Automate your information processing tasks. You can create a file of customer information; quickly and easily add, delete or update records; search a file; keep a file in order of the value in any field; and print records and labels in any desired sequence or from just a part of a file. Requires 32K TRS-80 and one drive. **\$74.95/\$10**

CSA-MAILIST SYSTEM: Creates, maintains and efficiently utilizes a name, address and telephone number file. 400 individual named address entries can be maintained on a single density mini-floppy, and are manipulated directly by record number (direct access file method). Sorts can be performed, name + address combinations can be coded. Listing-directories and labels can be printed. A conversion facility is provided to convert most sequential name, address file formats into direct. Requires 32K TRS-80 and one drive. **\$49.95/\$10**

ACCESSORIES
HEAD CLEANING DISKETTE: Cleans drive head! Write head in 30 seconds. Diskette absorbs loose oxide particles, fingerprints, and other foreign particles that might hinder the performance of the drive head. Lasts at least 3 months with daily use. Specify 5 1/4" or 8". **\$20 ea/\$45 for 3**

S & M SYSTEMS
INSEQ-80™: Indexed Sequential Access Method (ISAM) for the TRS-80 Model I. A must for anyone writing business programs. Eliminate wasted disk space from direct record processing. Split second access to any record. Access data records instantly via alpha/numeric "key" eg. Part No., zip code or sequentially in ascending key sequence. Add/modify records in any order. Access up to three files per program — Files may be spread over multiple disks. Machine language processing from your basic program. Utility programs to convert direct files to INSEQ-80 format. **\$49.95/\$10**

FULLY INTERACTIVE ACCOUNTING PACKAGE: ISAM (INSEQ-80) based. Includes General Ledger, Accounts Payable, Accounts Receivable and Payroll. System runs "stand alone" or "co-ordinated G/L" at users option. Based on Osborne accounting method. Requires 32K TRS-80, 2 or 3 drives. N/A CA. **\$99/\$10**

General Ledger \$99/\$10
Accounts Receivable \$99/\$10
Accounts Payable \$99/\$10
Payroll \$99/\$10
Osborne books: Req'd as additional documentation \$20 ea

INVENTORY Requires 32K, TRS-80, 1 drive. **\$125/\$10**
INSORT-80: Callable form BASIC via USB. Sorts "Random" Disk Files "Disk" to "Disk" sort times — 350 records in 35 secs, 1000 records in 6 minutes, 3500 records in 12 minutes. Machine language processing. Up to 35 sort keys ascending/descending. Utility to build BASIC program. Runs under NEWDOS. **\$49.95/\$10**

FLOPPY SAVER: Protection for center holes of 5 1/4" floppy disks. Only 1 needed per diskette. Kit contains centering post, pressure tool, 7-mil mylar reinforcing rings. Installation tools and rings for 25 diskettes. **\$11.95**
Re-orders of rings only. **\$ 7.95**

CP/M BASED SOFTWARE for Zenith, Altos, Radio Shack, Apple

Software /Manual
w/Manual /Manual

MICROSOFT BASIC-80: Disk Extended BASIC ANSI compatible with long variable names, WHILE/WEND, chaining, variable length file records. **\$325/\$25**

BASIC COMPILER: Language compatible with BASIC-80 and 3-10 times faster execution. Produces standard Microsoft relocatable binary output. Includes MACRO-80. Also linkable to FORTRAN-80 or COBOL-80 code modules. **\$350/\$25**

FORTRAN-80: ANSI 66 (except for COMPLEX) plus many extensions. Includes relocatable object compiler, linking loader, library with manager. Also includes MACRO-80 (see below). **\$425/\$25**

COBOL-80: Level 1 ANSI '74 standard COBOL plus most of Level 2. Full sequential, relative and indexed file support with variable file names. STRING, UNSTRING, COMPUTE, VARYING/UNTIL, EXTEND, CALL, COPY, SEARCH, 3-dimensional arrays, compound and abbreviated conditions, nested IF. Powerful interactive screen-handling extensions. Includes compatible assembler, linking loader, and relocatable library manager as described under MACRO-80. **\$700/\$25**

Z-80 SOFTCARD FOR APPLE: Your key to future software expansion. Get the best of both worlds, Apple's 6502 and CP/M Z-80. Plug in the card and get a Z80. Supports Apple language card and all Apple peripherals. Comes with set of three manuals. **\$339/\$75**

CCI-TELNET VERSION 5: A communication Package which enables microcomputer users to communicate both with Large Mainframes and other microcomputers. Extensive commands make it useful in many applications where communication between computers is necessary. Powerful terminal mode enabling user to save all data from a session on disk. Completely CP/M compatible. Multiple communication protocols supported. Able to transfer files in both directions without protocol where the other machine does not support any protocol. Extensive ON-SCREEN help. Source code provided. **\$149/\$15**

MICROPRO-WORD-STAR: Menu driven visual word processing system for use with standard terminals. Text formatting performed on screen. Facilities for text pagination, page number, justify, center and underscore. User can print one document while simultaneously editing a second. Edit facilities include global search and replace. Read/Write to other text files, block move, etc. Requires CRT terminal with addressable cursor positioning. **\$399/\$40**

BOS 'C' COMPILER: Supports most features of language, including structures, arrays, pointers, recursive function evaluation, and overlays. Package contains: compiler, linker, library manager, sample source files include games, a terminal emulator with disk I/O plus the source for many standard library functions; BOS C User's Guide; Book - The C Programming Language by Dennis Ritchie and Brian Kernighan. Requires at least 24K of RAM. **\$125/\$20**

CONFIGURABLE BUSINESS SYSTEM BY DMA: CBS is a data management system that allows true transaction processing. Custom accounting systems for payables, receivables, inventory control, order entry, and general ledger can be set up without using any programming languages. CBS can be used to define an application such as an inventory control system by specifying master files to describe the inventory, customer and vendor files. Transaction files can then be used to describe activities such as purchases and sales. An extremely easy-to-use data entry program is used to enter information about customers, vendors, inventory, sales and purchases. After data entry is complete, an update program can process the transactions against the various master files, updating account balances and inventory quantities. The system features a screen menu generator and a comprehensive report generator which can be used to produce invoices, purchase orders, re-order reports, mailing labels or other special reports specific to the application. Good documentation and a demonstration inventory system supplied. Requires at least 48K memory. Does not require any support language. **\$295**

DEALER (NATIONAL/INTERNATIONAL) INQUIRIES INVITED

Send for FREE Catalogue

The CPU SHOP

✓ 298

TO ORDER CALL TOLL FREE 1-800-343-6522

Massachusetts residents call (617) 242-3361

For detailed technical information, call 617/242-3361

Hours: 10AM - 6PM (EST) M-F (Sat. till 5)

*TRS-80 is a Tandy Corporation Trademark

5 Dexter Row, Dept. M8M
Charlestown, Massachusetts 02129

Massachusetts residents add


5% sales tax

Quantities on some items are limited

VISA*



Precision Engineered Drives...

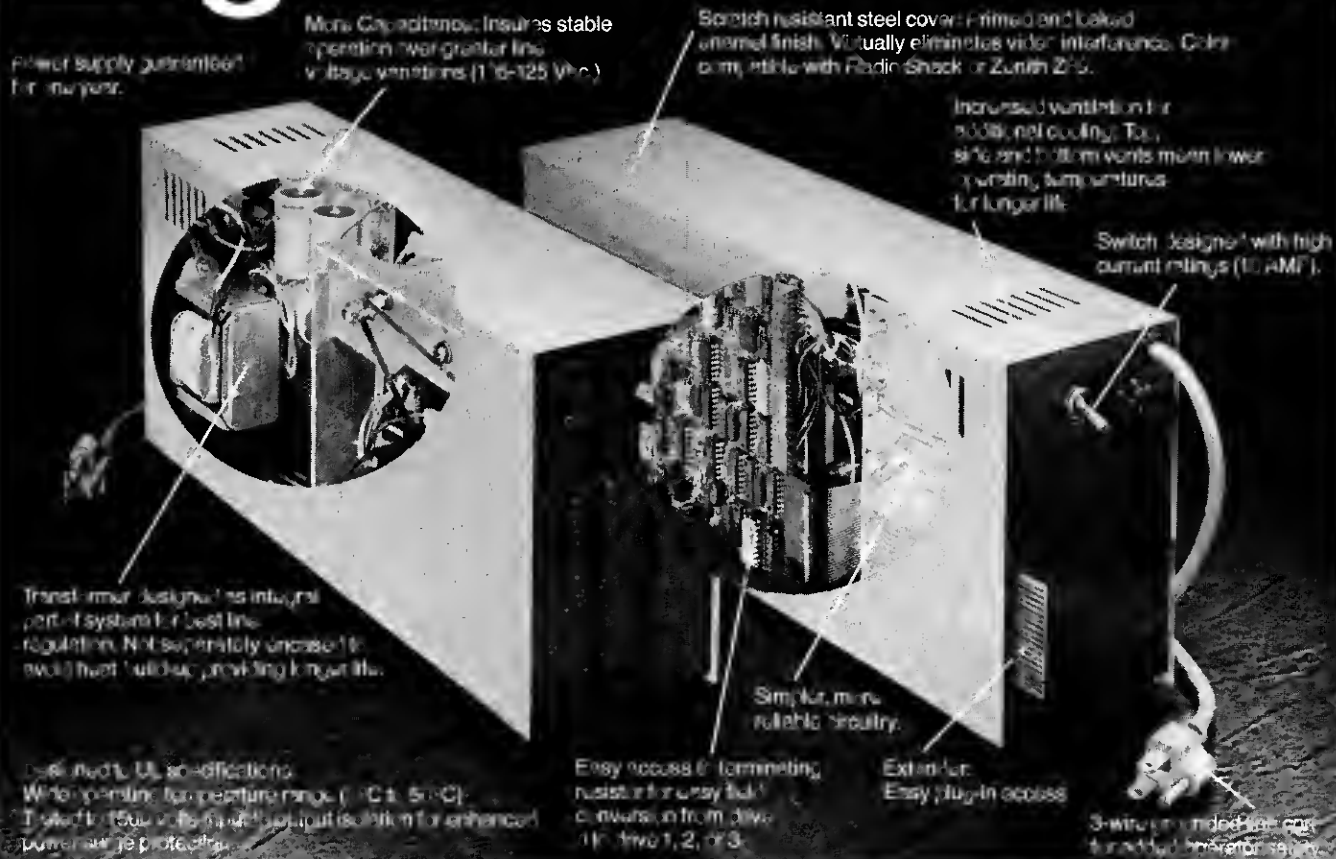

With the number of disk drives on the market increasing, more and more people are beginning to ask what's underneath that cover.

The CCI™ series of disk drives have been designed for long life and ease of operation. The features shown above are what set our CCI drives apart from the rest. With a CCI drive you get an integrated professional design!

If you're still not convinced that you get the most for your money with a CCI drive, just ask for our complete specifications sheet. Then, compare our disk drives to anyone else's.

5 1/4" DRIVES

CCI-100	40 Track (102K Bytes) for TRS-80* Model I	\$399.00
CCI-189	40 Track (102K Bytes) for Zenith Z89	\$499.00
CCI-200	77 Track (197K Bytes) for TRS-80* Model II	\$675.00

8" DRIVES

CCI-800	77 Track (1/2 Meg Bytes) for TRS-80* Model II	\$895.00
---------	---	----------

All CCI drives are also available for 220 Vac (50Hz) operation.

Operating Systems

NEWDOS Plus for 5 1/4", 40 and 77 Track Drives—with over 200 modifications and corrections to TRSDOS	\$110.00
CP/M for Model I, Zenith	\$150.00
CP/M for Model II, Altos	\$199.00

Software by S&M Systems

INSEQ-80™—Indexed Sequential Access Method (ISAM) for the TRS-80 Model I.

Four machine language programs that can be called from your BASIC program via ISR functions to access records either sequentially or randomly. The INSEQ-80 programs maintain all indexes and chains for you. Includes reorganization utility to consolidate files. **\$49.95**

Professional Business Software using INSEQ-80 for the TRS-80* Model I and Zenith Z89.

Accounts Payable, Accounts Receivable,	
General Ledger, Payroll	per package \$99.00
Inventory	per package \$125.00

ComputerCity™

TO ORDER CALL
TOLL FREE 1-800-343-6522
TWX: 710-348-1796

Massachusetts residents call 617/242-3350
For detailed technical information, call 617/242-3350.
Freight Collect, F.O.B. Charlestown.

*TRS-80 is a trademark of the Tandy Corporation

175 Main Street, Dept. K-7, Charlestown, MA 02129
Hours: 10AM-6PM (EST) Mon.-Fri. (Sat. till 5).

Products also available from: Radio Shack, NEC, Centronics, Paper Tiger, TI, Altos, MPI, Zenith, ATARI, Mattel, PET, OKIDATA, Apple, Eaton/LRC.

FRANCHISE AND DEALER (NATIONAL/INTERNATIONAL) INQUIRIES INVITED

Retail Stores: MA: Burlington, Charlestown, Framingham, Hanover NH: Manchester RI: Providence

✓ 215



```

OTO1230
1240 PRINT
1250 AS="":PRINT@384,"":INPUT"IS ABOVE DATA CORRECT -
YES OR NO";AS
1255 IFLEFTS(AS,1)="N"THENNU(X)=0:NMS(X)="":GOTO1000
1260 IFLEFTS(AS,1)<>"Y"THENPRINT@420,STRINGS(15," "):P
RINT@448,STRINGS(64,"-");GOTO1250
1270 PRINT@448,STRINGS(64,"-");
1300 Y=Y+1
1305 IFY>5THENCLS:PRINT:PRINT"5 FILE LIMIT HAS BEEN EX
CEEDED FOR TAPE #";NU(X);" - PRESS ENTER":PRINT:IN
PUTAS:GOTO1399
1310 PRINT@640,PLS(4);:INPUTFS(X,Y)
1315 IF(LEN(FS(X,Y))>14)THENPRINT@704,PLS(5);:PRINT@665
,STRINGS(24," "):GOTO1310
1320 PRINT@704,PLS(5);:INPUTDS(X,Y)
1325 IF(LEN(DS(X,Y))>8)THENPRINT@768,PLS(6);:PRINT@734,
STRINGS(15," "):GOTO1320
1330 PRINT@768,PLS(6);:INPUTTS(X,Y)
1335 IF(LEN(TS(X,Y))>5)THENPRINT@832,PLS(7);:PRINT@808,
STRINGS(20," "):GOTO1330
1340 PRINT@832,PLS(7);:INPUTCS(X,Y)
1345 IF(LEN(CS(X,Y))>12)THENPRINT@874,STRINGS(20," "):
GOTO1340
1350 AS="":PRINT@896,"":INPUT"IS ABOVE DATA CORRECT -
YES OR NO";AS
1360 IFLEFTS(AS,1)="N"THENY=Y-1:GOSUB1400:GOTO1300
1370 IFLEFTS(AS,1)<>"Y"THEN1350
1375 IFS2=1THEN1399
1380 AS="":PRINT@896,"DO YOU WISH TO ADD ANOTHER FILE
TO TAPE #";NU(X);"- YES OR NO";:INPUTAS
1385 IFLEFTS(AS,1)="Y"THENGOSUB1400:GOTO1300
1387 IFLEFTS(AS,1)<>"N"THEN1380
1388 IFS1=1THEN1399
1390 AS="":PRINT@896,"DO YOU WISH TO ADD ANOTHER TAPE
TO THE FILE";:INPUTAS
1392 IFLEFTS(AS,1)="Y"THEN1000
1394 IFLEFTS(AS,1)<>"N"THEN1390
1399 RETURN
1400 PRINT@665,STRINGS(24," "):PRINT@734,STRINGS(15,"
"):PRINT@815,STRINGS(15," "):PRINT@880,STRINGS(2
0," "):PRINT@896,STRINGS(63," "):RETURN
2000 ' LIST ENTRIES
2005 L1=1:L2=6
2010 CLS
2015 PRINTTAB(25)"FILE ENTRIES":PRINT
2020 FORI=L1TOL2
2025 PRINTI:NMS(I),TAB(15)I+6:NMS(I+6),TAB(30)I+12:NM
S(I+12),TAB(45)I+18:NMS(I+18)
2030 NEXTI
2035 PRINTSTRINGS(63,"+")
2100 PRINT@643,"-- OPTIONS --"
2110 F=0:PRINT"1 - LIST MORE ENTRIES"
2120 PRINT"2 - LIST DATA FOR SPECIFIC ENTRY":PRINT"3 -
RETURN TO MENU":INPUTF
2125 IFF=2THENGOSUB2200:GOTO2000
2130 IFF=3THEN100
2135 IFF<>1THEN2100
2140 IFL>1THENGOTO2000
2145 L1=L1+24:L2=L2+24:GOTO2010
2200 PRINT@896,"ENTER TAPE #";:INPUTN
2205 IFN<48THEN2200
2210 IFN<10000:GOTO2200
2215 IFN<10000:GOTO2200
2220 CLS:PRINT:PRINT"TAPE NUMBER";STRINGS(10,"."):NU(N)
2225 PRINT"TAPE NAME";STRINGS(12,"."):NMS(N)
2235 PRINT"TAPE DESCRIPTION";STRINGS(5,"."):DES(N)
2237 PRINT
2240 PRINTSTRINGS(63,"+")
2242 IFS1=1THEN2999
2245 PRINTTAB(20)"-- FILES ON TAPE --"
2250 PRINT"FILE NAME DATE WRITTEN TYPE
COUNTER LOCATION":PRINT
2260 FORJ=1TO5
2265 PRINTJ;FS(N,J);:PRINTTAB(18)DS(N,J),TS(N,J),CS(N
,J)
2270 NEXTJ
2273 IFS2=1THEN2299
2275 PRINT@960,"PRESS ENTER";:INPUTAS
2299 RETURN
2299 RETURN
3000 ' FILE UPDATE
3010 CLS:PRINT:PRINTTAB(5)"-- FILE UPDATE MENU --":PRIN
T:PRINT"1 - ADD FILE(S) TO A TAPE # ENTRY":PRINT"2
- UPDATE EXISTING FILE(S) IN A TAPE # ENTRY":PRIN
T"3 - DELETE FILE(S) FROM TAPE # ENTRY"
3012 PRINT"4 - RETURN TO FUNCTION MENU":INPUTI

```

```

3020 ONIGOSUB3100,3200,3300
3050 IFI=4THEN3999
3060 GOTO3010
3100 ' ADD A FILE
3110 S1=1:GOSUB2200:S1=0:X=N
3120 Y=0:FORZ=1TO5
3125 IFLEN(FS(N,Z))>0THENY=Y+1
3130 NEXTZ
3135 PRINT@640,PLS(4):PRINTPLS(5):PRINTPLS(6):PRINTPLS(
7)
3140 S1=1:GOSUB1300:S1=0
3199 RETURN
3200 ' UPDATE FILE
3210 S2=1:GOSUB2200:S2=0:X=N
3220 Y=0:PRINT@896,"ENTER FILE #";:INPUTY
3225 IFY<1000:GOTO3220
3227 PRINT@834,"":PRINT:PRINT:PRINT:PRINT
3228 PRINT@640,PLS(4):PRINTPLS(5):PRINTPLS(6):PRINTPLS(
7)
3230 S2=1:GOSUB1310:S2=0
3235 AS="":PRINT@896,"DO YOU WISH TO CHANGE ANOTHER FIL
E - YES OR NO";:INPUTAS
3240 IFLEFTS(AS,1)="N"THEN3299
3245 IFLEFTS(AS,1)="Y"THENPRINT@896,STRINGS(63," "):GOT
O3220
3250 GOTO3235
3299 RETURN
3300 ' DELETE FILE
3310 S2=1:GOSUB2200:S2=0:X=N
3320 PRINT@896,"WHICH FILE DO YOU WISH TO DELETE";:INPU
TY
3325 IFY<1000:GOTO3320
3330 O=0:IFLEN(FS(N,Y))=0THENPRINT@896,"NO ENTRY FOR FI
LE";Y;" 1-TRY ANOTHER ENTRY 2-UPDATE MENU";:INPU
TO
3335 IFO=1THENS2=1:GOSUB2220:S2=0:GOTO3320
3340 IFO=2THEN3399
3345 FS(N,Y)="" :DS(N,Y)="" :TS(N,Y)="" :CS(N,Y)="" :GOSUB3
400
3350 S2=1:GOSUB2220:S2=0:X=N
3355 AS="":PRINT@896,"DO YOU WISH TO DELETE ANOTHER FIL
E - YES OR NO";:INPUTAS
3360 IFLEFTS(AS,1)="Y"THENS2=1:GOSUB2220:S2=0:GOTO3320
3399 RETURN
3400 FORZ=1TO4
3410 IFLEN(FS(N,Z))>0THEN3480
3430 FS(N,Z)=FS(N,Z+1):DS(N,Z)=DS(N,Z+1):TS(N,Z)=T
S(N,Z+1):CS(N,Z)=CS(N,Z+1)
3435 FS(N,Z+1)="" :DS(N,Z+1)="" :TS(N,Z+1)="" :CS(N,Z+
1)=""
3480 NEXTZ
3499 RETURN
3999 RETURN
4000 CLS:PRINT:INPUT"WHICH TAPE # ENTRY DO YOU WISH TO
DELETE";D
4005 IFD>48THEN4000
4010 IFNU(D)=0ORLEN(NMS(D))=0THENPRINT:INPUT"TAPE ENTRY
DOES NOT EXIST. PRESS ENTER";AS:GOTO4099
4020 NU(D)=0:NMS(D)="" :DES(D)="" :FORZ=1TO5:FS(D,Z)="" :D
S(D,Z)="" :TS(D,Z)="" :CS(D,Z)="" :NEXTZ
4050 CLS:PRINT:PRINT"TAPE ENTRY";D;"DELETED. PRESS ENT
ER.":INPUTAS
4099 RETURN
6000 ' PRINT
6005 IFPEEK(14312)>127THEN6099
6010 PC=66:GOSUB6500
6015 FORI=1TO48
6020 IFNU(I)<>0THENLPRINT:LPRINT"TAPE#";NU(I);:LPRINT
TAB(12)"NAME: ";NMS(I);:LPRINTTAB(36)"DESCRIPTION:
";DES(I);PC=PC+2
6030 FORJ=1TO5
6040 IFLEN(FS(I,J))>0THENLPRINTTAB(10)"FILE";J;" "
:FS(I,J);:LPRINTTAB(36)"TYPE: ";TS(I,J);:LPRINTTAB
(50)"COUNTER POSITION: ";CS(I,J);PC=PC+1
6050 NEXTJ
6060 IFPC>50THENGOSUB6500
6070 NEXTI
6099 RETURN
6500 FORZ=PC+1TO64:LPRINT:NEXTZ:PC=3:LPRINTTAB(30)"TAPE M
ANAGEMENT SYSTEM PRINT":LPRINT:RETURN
7000 ' WRITE O/P TAPE
7010 CLS:PRINT:PRINT"READY CASSETTE FOR OUTPUT":PRINT:I
NPUT"PRESS ENTER";AS
7030 FORK=1TO48
7040 IFNU(X)=0THEN7070
7050 FORY=1TO5
7055 IFLEN(FS(X,Y))=0THENFS(X,Y)=""

```

For example, you may have a cassette on which you put Santa Paravia, Space Trek, Airmail Pilot and Golf. The tape name, therefore, is ISI Games. The description is Instant Software Games. You have one file entry each for Santa Paravia, Space

Trek, Airmail Pilot and Golf, containing creation date, file type (BASIC) and tape counter positions.

When you begin program execution, you can create a new TLMS file, or read and update an existing one. Tapes must be

numbered from one. The options (Fig. 1) available once a TLMS file is established are:

List File Entries: This lists the first 24 tape numbers and names on the monitor (Fig. 2). From this screen you can list the remaining 24 tapes; list all data

for a specific tape (Fig. 3); control or return to the main menu.

Add Tape# Entry to File: This lets you add more tape entries to an existing file. Error detection stops you from inadvertently writing over an existing entry.

```

+++++
-- FILES ON TAPE --
FILE NAME      DATE WRITTEN  TYPE      COUNTER  LOCATION
1 SANTA PARAVIA 07/15/79  BASIC      10
2 SPACE TREN IV 07/15/79  BASIC     150
3 AIRMAIL PILOT 07/15/79  BASIC     280
4 GOLF          07/15/79  BASIC     350
5
PRESS ENTER? +

```

FILE 1	SANTA PARAVIA	BASIC	10
FILE 2	SPACE TREK IV	BASIC	150
FILE 3	AIRMAIL PILOT	BASIC	300
FILE 4	GOLF	BASIC	400
FILE 5			

FILE 1	SANTA PARAVIA	BASIC	10
FILE 2	AIRMAIL PILOT	BASIC	300
FILE 3	GOLF	BASIC	400
FILE 4			
FILE 5			

BUSINESS CONTROL PROGRAMS

☐ PAYROLL ☐ GENERAL LEDGER ☐ ACCOUNTS PAYABLE ☐ ACCOUNTS RECEIVABLE

These business systems are designed with the business manager in mind. Major changes in your current bookkeeping methods are not necessary to make these programs work for you. Data may be entered into any one of the systems either directly or through subprograms, so that duplicate data entry is not required. This will save mistakes.

Accurate reports of financial activity may be obtained on a scheduled basis or at irregular intervals.


The systems require CP/M and C-RISC. Customization, installation and training are available at additional cost. WRITE FOR SAMPLE REPORT AND TRIAL DISK—\$25.00 (credited toward purchase price).

- A Totally Linked Single Entry Accounting System
- Completely Screen Oriented Systems Provide User Prompting for Each Entry
- User Assignable Account Numbers
- Flexible, Reliable and Efficient
- Installation and Training Available

AS LOW AS **\$300⁰⁰**

CP/M 2.2 Control Program for Microcomputers
Enabling You to Run Software Published for
CP/M 1.4 on the TRS-80 Model II (Including Communications Programs)

CP/M[®] 2.2

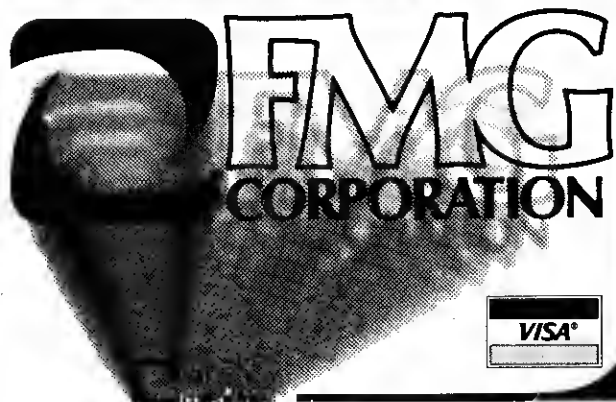

CP/M is considered the industry standard disk operating system because it gives you the hardware-independent interface you need to make your computer work for you. FMG CORP. with N. N. W. EFFENS THE CP/M 2.2 FOR THE TRS-80 MODEL II. The best in the evolution of a reliable and efficient software system, CP/M 2.2 features an enhanced upward compatible file system and powerful new command processing utilities. From minidisks and floppy disks, all the way to hard disk, hard disk (when available), the flexibility of CP/M 2.2 makes it a truly universal operating system. The package includes an 80 system disk, editor, assembler, debugger, and communications software for the TRS-80 Model II. Special utilities not available with other CP/M systems are also included in FMG's CP/M 2.2.

CP/M is a registered trademark of
Digital Research Corp. TRS-80 is a
registered trademark of Tandy Corp.

\$200⁰⁰

From
the
ORIGINATOR
of the

TRS-80[®] PROJECT



P.O. Box 16020
Ft. Worth, Texas 76133
Phone (817) 294-2510

✓12



Send for FREE CATALOG

M443

THE PASCAL/MT[™] \$250.00

PASCAL/MT[™] is a new and PASCAL compiler designed for TRS-80 and Zenith computer systems, provides an efficient development cycle as well as efficient execution of target programs.

- Compiler operates under the CP/M operating system in as little as 32K bytes of RAM
- Interactive Symbolic Debugger which enables the programmer to examine variables, set breakpoints, and trace program calls interactively at run time
- Compiles at the rate of 100 lines per minute on a 2 MHz TRS-80
- Generates Executable to 1. TIMES FASTER than popular interactive Pascal
- The only generation of PASCAL object code which is 1.5 times faster with a minimum run time overhead of 1.5K bytes
- Interactive features allow the programmer to write interrupt drivers for I/O and other real time tasks in Pascal/MT
- All manipulation variables may be performed with the built-in operators: SET, IF, CL, IF, TST, IF, SHL, SHR, SWAP, L, HI
- Assembly language subroutines may be called from Pascal/MT
- Fastest interactive version of Pascal/MT is also included
- Pascal data structures such as SET and ENUMERATION AND SURANGE, TYPES, RECORD, UNION, REAL, INTEGER, CHAR, and BUCKLE, and SET, GET, PUT

PASCAL/MT[™] includes compiler and real time symbolic debugger. The system requires 32K minimum and 2 minidisks or one hard disk.

OURS WORK!

ACCOUNTING PROGRAMS

from the company with
years of experience
on small computers
and thousands of customers

prices resulting from
volume sales

PACKAGE OF
5 PRODUCTS **\$395.**

PRODUCTS
EACH **\$95.**

MANUALS
EACH **\$20.**

GENERAL LEDGER
PAYROLL
ACCOUNTS RECEIVABLE
ACCOUNTS PAYABLE
DEPRECIATION
for

TRS-80*
MODEL I with TRSDOS*
MODEL II with CP/M†
OTHER CP/M† SYSTEMS

Product Info &
License/Order
Form.
FROM.....

PHONE

(503) 476-1467

840 N.W. 6th STREET, SUITE 3
GRANTS PASS, OREGON 97526

*Trademark Radio Shack, Div. Tandy Corp.

†Product Digital Research, Inc. ✓ 44

its...SOFTWARE SE Search Entry

SE is a super-fast, general purpose information retrieval program for the TRS-80*. The uses of SE are limitless. It can be a file system, a matching service, an inventory control, or a message center. Whenever fast searching of large amounts of data is needed, SE can be your program.

Written in Z80 machine language, SE compares tens of thousands of characters in a few seconds. Simple commands add, change, or remove data entries. To search for entries, up to 64 characters can be combined as targets for immediate retrieval. SE occupies only 4K; the rest is storage and can be saved on tape or disk.

The tape version for 16K level II, SE2.0, is \$24.95, while the disk version for DDS up to 48K, SE3.0, is \$49.95. The price includes full documentation.

Other TRS-80 its...Products

COMPU-DIET - Weight Loss System
Behavior Mod, Forecast, Database
MINIVENT - Minimal Inventory Control
1400 items, 16K Level II
BASICIO - Machine Language I/O for BASIC
Data and Programs to Tape or Disk

Please send

☐ SE2.0 (tape) @ \$24.95 ☐ COMPU-DIET 1.2 @ \$19.95
☐ SE3.0 (disk) @ \$49.95 ☐ MINIVENT 2.0 @ \$49.95
☐ BASICIO 1.5 @ \$14.95 ☐ Additional Information

Fla. Res. add 4% Sales Tax - Total \$

☐ Check/Money Order ☐ VISA ☐ MASTERCARD

Card No. _____ Exp. Date _____

Name _____ Bank No. (MC) _____

Address _____

✓ 300

its... Information Technology Systems
POB 2667 Sarasota FL 33578
(813) 366-0064

*TRS-80 is a trademark of Radio Shack - a Tandy Corporation

TRS-80*TRS-80*TRS-80*TRS-80

Model I system owners
SYSTEM TOO SMALL?

We take trade-ins on Model II

We also buy used systems outright

Call or write for quotation

USED TRS-80 SYSTEMS

We sell used keyboards, exp.int.,

disk drives, etc.

Call or write for quotes

NEW HARDWARE IN STOCK

16K Level II \$749.00

Radio Shack disk drives \$449.00

16K Memory-Lifetime warranty \$89.00

Centronics 730-1 \$749.00

IDS 440 Paper Tiger \$949.00

SOFTWARE

Data Management Systems-Mod I or II

An excellent design-it-yourself

software package \$99.00

Utilizes and requires Ract Computes

GSF and COMPROC

WORD PROCESSOR FOR MODEL II

WORDSCRIBE-Bv Microphase Systems

A first for Model II-\$150.00

Completely integrated automatic

letter writer for Model II

Consists of WORDSCRIBE, WORDMAIL,

MAILLIST-\$250.00

PRINTER SPOOLER FOR MODEL I

Increases throughput of printer operations

Buffer size user defined

Fully relocatable

Executes as a BASIC program

A must when using Radio Shack printers

\$14.95

VERN STREET PRODUCTS

114 W. Taft Sapulpa, OK
74066 19181224-4260

✓ 111
We handle a full line of
Radio Shack products.

TERMS-COD WELCOME, CASH, CHECK, OR MONEY ORDER
ADD 3% FOR MASTER CHARGE AND VISA

TRS 80

TRS-80 Model I



699

Level II 16K. 26-1056

MODEL 3 call today!

Model II



\$3499

64K, 1-Disk TRS-80
Model II System

We accept check, money order or phone
orders with Visa or Master Charge.
(Shipping costs added to charge orders).



CHARGE IT

Computers Unlimited

1524 OAK HARBOR ROAD, FREMONT, OHIO 43420

419-332-4881

Collect

TRS-80 is a Trademark of Tandy Corp.

Hide your passwords from prying eyes.

The Invisible Password

Michael A. Conley
Los Angeles, CA 90046

step boot and load of this program. The program then calls and displays the disk directory without exiting from BASIC.

How It Works

By using the INKEY\$ function to input the password, you won't display the characters on the screen. A loop allows you to input up to eight characters as a password. The ENTER key, however, can be used at any time to terminate the input.

The display next asks for the program name. A similar loop allows us to INKEY\$ up to 12 characters (remember those file extensions) but this time, the input is echoed to the display (Example 1).

Once the input is completed, line 270 attempts to load the program. If an error is encountered, such as an invalid password or an incorrect file name,

Have you ever needed to load a password-protected program and wished you could keep those nearby from seeing the password? Here's a simple, short program that will do the trick nicely!

It's written for the TRS-80, Disk BASIC, using the Apparat NEWDOS operating system—but it can easily be modified for whatever your particular system requires. The real advantage of NEWDOS is that it allows single-

```

100 REM          *** THE INVISIBLE PASSWORD ***
                  BY MICHAEL A. CONLEY

110 REM

                  WRITTEN FOR TRS-80 DISK BASIC
                  AND APPARAT NEWDOS

120 ON ERROR GOTO 280
130 CLS:CMD"DIR"
140 C$ = "" : B$ = ""
150 PRINT@778,"ENTER PASSWORD:"
160 FOR X = 1 TO 8
170 A$ = INKEY$:IF A$ = "" THEN 170
180 IF ASC(A$) = 13 THEN 210
190 B$ = B$ + A$
200 NEXT X
210 PRINT@906, "WHAT PROGRAM NAME:";
220 FOR X = 1 TO 12
230 A$ = INKEY$: IF A$ = "" THEN 230
240 IF ASC(A$) = 13 THEN 270
250 C$ = C$ + A$:PRINT@926,C$;CHR$(30)
260 NEXT X
270 CLS:PRINT@468,"ONE MOMENT ...":RUN C$ + "." + B$
280 PRINT@463, "INVALID ENTRY - BEGIN AGAIN."
    :FOR X = 1 TO 1800 : NEXT X : RESUME 130
290 END

```

Program Listing.

```

FILE DIRECTORY --- DRIVE 0      HOPMAC    -- 09/16/79

PAYFORM   P          DISKDUMP/BAS   P   TVLABEL   P
RADINST    P          DIRCHECK/CMD   P   INVTORY/PCL  P
RCV/DAT    P          RADLABEL    P   CREWPAY    P

```

ENTER PASSWORD:

WHAT PROGRAM NAME: PAYFORM

Example 1.

an error-trapping routine restarts the invisible password allowing the user another attempt.

A Word of Caution

The Apparat NEWDOS system is sold with its password function disabled, but the documentation explains a simple procedure to re-enable its password protection.

If you're using this program under TRSDOS 2.2 or 2.3, you'll have to change or eliminate line 130, which calls the directory under NEWDOS. But that won't

stop you from using the program.

Using the AUTO command under NEWDOS, simply boot the disk and type, AUTO BASIC RUN "PWDINVIS" (or whatever filename you give this password program when you save it to disk). Then, when you boot the system, NEWDOS automatically loads BASIC, loads the program, the display, the directory and then prompts you to input the password.

And those prying eyes won't have a chance of stealing your secrets! ■

*Make sure you know your O's
from your zeros with this machine code subroutine.*

Slash Zero

Robert M. Richardson
Drawer 1065
Chautauqua Lake, NY 14722

The uppercase Os and numeric zeros on many printers appear virtually identical unless closely scanned with a magnifying glass. The following assembly language program will let your printer slash its zeros, even if it's not equipped to do so.

The source code program in Program Listing 1 was written using the TRS-80 Editor/Assembler (either Radio Shack cassette version or Apparat NEW-

DOS + version—both are excellent) and printed on a Western I/O Selectric Printer terminal that does not have the slash-zero type.

Assembly Language

For those readers unfamiliar with assembly language programming, a few words about source and object codes and what they accomplish are in order.

After grasping the basics of Level II, the next step is to begin studying how to converse with your TRS-80's Z-80 microprocessor in its own language. It speaks Zilog machine language, which is somewhat easier to learn than Russian, and, for

many, almost on a par with learning Latin when only a few hundred words of vocabulary are required.

It is much quicker to speak to someone in his own language than it is to use an interpreter (BASIC).

Machine language programs invariably run 300 to 400 times faster than a program in BASIC, Fortran or Cobol high level languages. Furthermore, machine language programs require only 1/10 the memory of a program written in a higher level language, perhaps 1/7 the memory, if you use Pascal.

The TRS-80 editor/assembler allows you to write assembly language programs in source code that uses the Zilog standard mnemonics (LD=load, CP=compare, RET=return, etc.) rather than in 8-bit binary or its decimal equivalent.

After the source code has been written (see Listing 1), the editor/assembler program (originally written by Zilog) then makes two passes through the program, both editing and assembling it after the "A" command, ENTER. The obvious errors are printed out as well as the object code for the program, illustrated in Program Listing 2.

The left column is the memory position in hexadecimal and is keyed on the number you input in line 100 of the source program. The second most left column is the complete instruction (opcode + operand) translated into 1, 2 or 3, but rarely 4, bytes of object code in hex which will be loaded into your TRS-80's memory in binary format.

The first two-digit hex number

in the second column is the opcode. There are 157 fundamental opcodes, or instructions, for the Z-80 and 547 additional variations for a total instruction set of 694.

If you were a real masochist, you could manually load each object code hex byte, after converting the hex into decimal, via the BASIC POKE instruction.

Program Flow

The REMarks section of Listing 1 briefly explains each line's function, but for those who wish to run through the program flow in detail, be seated, just like you were in Assembly Language 101 class.

We started the print zero subroutine in line 140 at memory location 32533, so that another small print subroutine allowing the user to set the line at any number could be tacked on later. Print zero only requires 53 bytes of memory (7F41 - 7F15 = 53 decimal), so it may be set exactly at the high end of your TRS-80's memory minus 53, if desired.

If you are using disk and have plenty of memory, it would be wise to place it about 200 bytes from the top, since some disk operating systems use the top few bytes for sundry purposes.

The address may be in decimal (32533) or hex (7F15H) as the assembler will automatically change any number not ending in H to hex. Just remember, any hex number beginning with a letter—A, B, C, D, E or F—must be preceded by a zero, or an error will be printed when you assemble the program.

Line 150, the START label, be-

```

00100 ; SOURCE CODE PROGRAM TO PRINT ALL ZEROS WITH A SLASH
00110
00120 ; BY ROBERT M. RICHARDSON W4UCH/2
00130
00140 ORG 7F15H ;32533 DECIMAL
00150 START PUSH AF ;SAVE AF BC DE HL REGISTERS
00160 PUSH BC
00170 PUSH DE
00180 PUSH HL
00190 LD A,C ;NEXT CHAR. TO ACCUM.
00200 CP 030H ;30H = ASCII 0: IS IT A 0?
00210 JP Z,ZERO ;IF 0 GOTO ZERO SUBROUTINE
00220 JP FINIS ;IF NOT 0 CONTINUE PRINTING
00230 ZERO CALL TEST ;READY TEST FOR PRINTER
00240 LD A,02FH ;ASCII SLASH
00250 LD (37E8H),A ;PRINT SLASH
00260 CALL TEST ;READY TEST FOR PRINTER
00270 LD A,08H ;08 = ASCII BACKSPACE
00280 LD (37E8H),A ;PRINT BACKSPACE
00290 FINIS POP HL
00300 POP DE
00310 POP BC
00320 POP AF
00330 JP 058FH ;BACK TO ROM PRINT ROUTINE
00340 TEST LD A,(37E8H) ;PRINTER STATUS
00350 CP 03FH ;IS PRINTER READY?
00360 JR NZ,TEST ;LOOP TILL PRINTER READY.
00370 LD C,0AH ;INITIALIZE DELAY
00380 LD B,0 ;LOOP TO ALLOW PRINT
00390 DELAY1 LD DELAY2 ;HEAD TIME TO SETTLE DOWN
00400 DELAY2 DJNZ DELAY2 ;FROM BACKSPACE VIBRATION.
00410 DEC C ;ABOUT 20 MILLISECS.
00420 JP NZ,DELAY1 ;READY TO PRINT
00430 RET ;READY TO PRINT
00440 ORG 4026H ;PRINTER DRIVER ADDRESS
00450 DEFW START ;WHERE TO BEGIN SUBROUTINE
00460
00470 END

```

Program Listing 1.

gins the subroutine. Modifying the line printer control block's driver address in memory locations 16422 and 16423 (is actually accomplished in lines 440 and 450).

The opcode, PUSH instructions from line 150 to 180 merely store, but do not change the values of your AF, BC, DE and HL registers in the stack. PUSHing all of them into the stack is unnecessary in this particular subroutine, but is a good habit when writing any subroutine. If critical data from your main program resides in any of the registers used in the subroutine, it will be lost. Saving the contents in these lines and restoring them in lines 290-320 is a most worthwhile habit.

The opcode LD and operand A,C transfers the contents of register C to register A, the accumulator in line 190. It just so happens that during any LLIST (list program output to printer) operation, register C contains the value of the NEXT character to be printed.

The opcode CP in line 200 and operand 30H (ASCII zero = 48 decimal = 30 hex) subtract 30 hex from the contents of the accumulator (next character to be printed) and set the Z-80's status flags accordingly. The result of the subtraction is discarded. If the result is zero, as when the next character to be printed is a zero, then the next instruction executes a jump to the line with the label ZERO, line 230.

The JP opcode followed by operand Z, ZERO in line 210 is exactly the same as the BASIC IF-THEN-GOTO statement. If the result of the simple binary subtraction in line 200 is not zero, the program falls through to the next statement in line 220, just as in BASIC. This line's unconditional JP says GOTO the line with the label FINIS (line 290).

In lines 290 to 320 the program restores the original values to the registers. Line 330 returns to the ROM program, memory location 58D hex = 1421 decimal. This is where the line printer control block driver addresses (16422 and 16423) told the program to go before being modified in lines 440 and 450.

Time Factor

How long a time period has the subroutine used to examine each non-zero character before returning to the regular printer routine? You have used 13 instructions, which at an average execution time of 4 cycles = 52 cycles. With a TRS-80 clock of 1.7 MHz, each cycle takes .5637 microseconds times 52 or approximately 29 microseconds. Does an 29 microsecond delay slow down our 15 character per second printer? No, at this subroutine speed the printer does not even know you are there.

If the result of the subtraction in line 200 is a zero, line 210 jumps to 230. The CALL opcode is exactly the same as a BASIC GOSUB with the place to go in the operand, TEST, line 340. The RETURN, which must terminate every GOSUB, is RET in line 430.

In lines 340 to 430, the program knows the next character to print is a zero and introduces a short delay.

After the I/O Selectric has completed a character and is ready for the next one, it places a 3F hex = 63 decimal = ASCII ? into memory location 14312 = 37E8 hex. It is saying, "OK, I

```
10 REM 100000030004000500060070080009000
10 REM 100020030004000500060070080009000
```

```
10 REM 10000003000400050006000700080009000
10 REM 1000020003000400050006000700080009000
10 REM 10000003000400050006000700080009000
```

Program Listing 3.

printed what you sent me. What next?"

Line 340 then loads the value from memory location 37E8H into the accumulator. Line 360 subtracts 3F hex from it. In line 370, because the result is zero, the program falls through to the next line: another IF-THEN statement, just as in BASIC. The program uses a jump relative (JR) here, because it saves one byte of memory and can move 128 positions back or 127 forward, more than enough for our purposes.

Lines 380 to 420 provides a 20 millisecond delay that allows our Selectric printer time to settle down from the bone shaking that occurs when we backspace the device while printing multiple zeros.

The first two lines in Program Listing 3 show the program without this delay. The last three

lines illustrate the 20 millisecond delay.

In line 410 the program returns to the line following the CALL, line 240. Line 240 loads the ASCII slash = 2FH = 47 decimal into the accumulator. (See page C/2 of the Level II Manual for ASCII codes in decimal and enter the hex equivalents next to each.)

Lines 250 and 260 place 2FH (the /) into memory location 37E8H (14312), which is the line printer's PRINT address and then awaits the line printer's "handshake", saying, "I printed the slash, and I'm ready for another character via the CALL TEST in line 260."

When the printer is ready, the program falls through to line 270. The accumulator is loaded with ASCII 8H, the backspace signal, while line 280 sends the slash to the printer.

Line 330 gives the instruction GOTO original print routine and print that zero on top of the slash, which was what this subroutine was all about!

As mentioned earlier, the subroutine's starting address is put into the line printer control block driver address at 16414 and 16415 by lines 440 and 450.

Conclusion

This mini-subroutine will certainly enhance any program listings you wish to print and give them a professional appearance when using a printer without the slash-zero typeface.

Before assembling the source code, remember to give it a name. This subroutine has been tested with Level II BASIC, DOS 2.1, DOS 2.2 and NEWDOS+ and works fine with all of them. ■

Appendix:

This program is from Chapter 8 of the author's *Disassembled Handbook for TRS-80 Volume I*.

```

7F15      00140      ORG      7F15H
7F15 F5      00150      START  PUSH    AF
7F16 C5      00160      PUSH    BC
7F17 D5      00170      PUSH    DE
7F18 E5      00180      PUSH    HL
7F19 79      00190      LD      A,C
7F1A FE30    00200      CP      030H
7F1C CA227F  00210      JP      Z,ZEPO
7F1F C3327F  00220      JP      FINIS
7F22 CD397F  00230      ZERO   CALL    TEST
7F25 3E2F    00240      LD      A,02FH
7F27 32E837  00250      LD      (37E8H),A
7F2A CD397F  00260      CALL    TEST
7F2D 3E08    00270      LD      A,08H
7F2F 32E837  00280      LD      (37E8H),A
7F32 E1      00290      FINIS  POP     HL
7F33 D1      00300      POP     DE
7F34 C1      00310      POP     BC
7F35 F1      00320      POP     AF
7F36 C38D05  00330      JP      058DH
7F39 3A2637  00340      TEST   LD      A,(37E8H)
7F3C FE3F    00360      CP      03FH
7F3E 20F9    00370      JR      NZ,TEST
7F40 0E0A    00380      LD      C,0AH
7F42 0600    00390      DELAY1 LD      B,0
7F44 10FE    00400      DELAY2 DJNZ   DELAY2
7F46 0D      00410      DEC     C
7F47 C2427F  00420      JP      NZ,DELAY1
7F4A C9      00430      RET
4026      00440      ORG      4026H
4026 157F    00450      DEFN    START
0000      00470      END
000000 TOTAL ERRORS

DELAY1 7F42 00390 00420
DELAY2 7F44 00400 00400
FINIS 7F32 00290 00220
START 7F15 00150 00450
TEST 7F39 00340 00230 00260 00370
ZERO 7F22 00230 00210

```

Program Listing 2.

Delve into the dark secrets of cryptanalysis.

Code Cracker

James P. Morgan
2386-B Ash Creek
Scott AFB IL 62225

On the morning of August 1, 1943 a bomber force of 178 American Liberators departed a Libyan airfield en route to the huge oil field complex at Ploesti, Rumania. To ensure safe passage over Allied defenses, a coded message was sent to units throughout the Mediterranean which identified the force as friendly.

Within minutes after takeoff, German cryptanalysts in Athens had intercepted and broken the coded message. The Ploesti air defenses were alerted and fifty-three American Liberators were shot down.

The secret war waged by the code clerks from back rooms once again influenced the outcome of a military operation.

The first use of code for military operations is credited to Julius Caesar. He devised the coded alphabet which worked on the principle of one-for-one direct letter substitution. You will find his code used in the cryptograms published in newspapers and periodicals to this day. It is still known as the Caesar Alphabet and is formed as shown in Fig. 1.

The standard alphabet is thus transposed randomly by direct substitution of a new, coded alphabet.

Moving from the days of the Roman legions to modern cryp-

tography, a most significant development has been the introduction of the computer as the code-maker's and code-breaker's most powerful analytical tool.

I have set my micro to the task of creating and breaking codes and the following program may help you to discover yet another enjoyable application for your home computer.

Developing the Program

When I program, I find it most useful to establish a specific outline of the program's requirements. Each requirement is then developed and fulfilled separately, tested and merged into an overall program. My outline follows:

1. Develop a method of computer-created random Caesar alphabets.
2. Provide computer or user input of messages to be coded.
3. Computer coding and display of the coded message.
4. Provide user interaction with the computer in breaking the coded message.
 - a. Input trial letter substitutions.
 - b. Display results.
 - c. Allow for further modification.
 - d. Continue until solved with update every cycle.

What seemed at first glance a relatively easy programming

task turned out to be quite difficult.


Program lines 10 through 100 print a general introduction to the program. The CLEAR 500 statement in line 20 reserves the string space required by later sections of the program.

Line 110 DIMensions the arrays which will store the codes at various stages. The A\$(X) array holds the Caesar Alphabet. The JS\$ array is filled with the coded sentence. The K\$ array is used to store the user's code-breaking efforts.

Lines 120 through 230 satisfy the first requirement of my outline. These lines automatically create the code. Line 120, the C\$ string, sets the normal alphabet used for comparisons throughout the program. Lines 130 through 150 initialize the A\$(X) at 0.

A random number is selected by line 160. Assume the number selected is five. A looping routine starts at line 170. The first time through, with an X value of one, line 180 fails the test, eg., A\$(1)=0 and MID\$(C\$,B,1)=E since B=5.

Line 190 also fails the IF test since A\$(1) equals 0 and the program drops to line 200. At line 200, A\$(1) is assigned the value of the letter E. Line 210 counts N=1 and line 220 sends the program back for another random

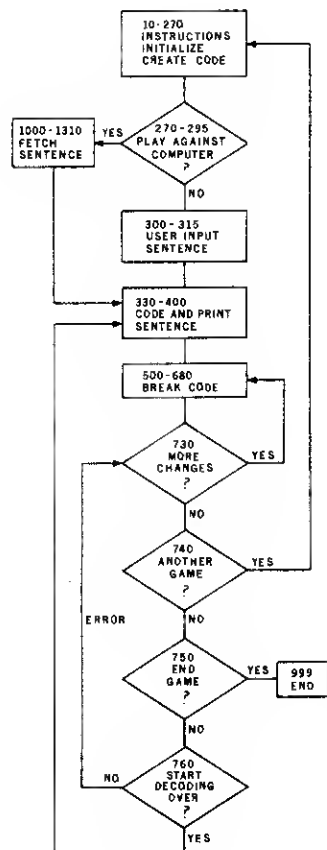



General Flow Chart

FROM **PROGRAMMA** HI-RESOLUTION GRAPHICS FOR THE TRS-80®




LOWER CASE

The 80-GRAFIX board includes two sets of lower case characters at no additional cost.

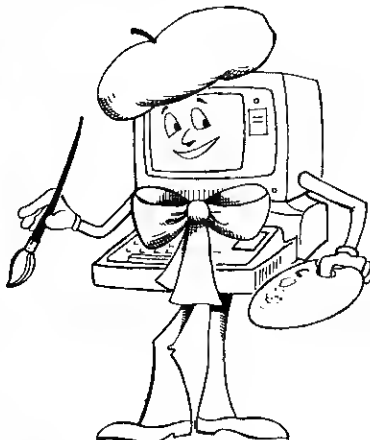

INVERSE VIDEO

The 80-GRAFIX board allows you to do inverse video to high-light your screen displays.

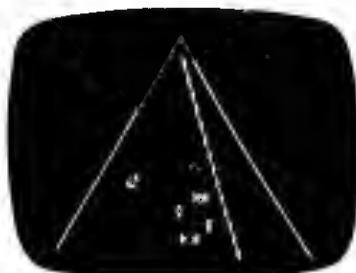

DEMONSTRATION PROGRAMS

The 80-GRAFIX board is supplied with a Character Generator software and several demonstration programs.

FINALLY, AT LAST...

HI-RESOLUTION GRAPHICS is available for your TRS-80 computer system. The 80-GRAFIX board from PROGRAMMA International, Inc. gives your TRS-80 high resolution capability that is greater than the Commodore CBM/PET or even the revered APPLE II.

80-GRAFIX gives the TRS-80 an effective screen of 384X192 pixels, versus the normal 127X192 for the TRS-80, 80X60 for the CBM/PET, or the 280X192 of an APPLE II. As an added feature, 80-GRAFIX offers you lower case characters at no additional cost. Of course, you can also create your own set of up to 64 original characters using the supplied Character Generator software.

The 80-GRAFIX board is simple to install (note that this voids your Radio Shack warranty), and programming is done through BASIC. 80-GRAFIX opens up a whole new realm of software development and excitement never dreamed of for the TRS-80!




CHARACTER GENERATOR

The supplied character generator software allows you to create your own character set of up to 64 original characters.



REAL-TIME GRAPHIC GAMES

With the 80-GRAFIX board you can write exciting real-time games using BASIC.



EASY INSTALLATION

The 80-GRAFIX board is simple to install and fits inside the TRS-80 case.




GRAPHICS GALORE

The 80-GRAFIX board and the supplied Character Generator allow you to become an artist.



ELECTRONIC DESIGN

The 80-GRAFIX board has unlimited application in Electronic design and Education.



80-GRAFIX HI-RESOLUTION

Finally, the only means to protect your computer investment is to order an 80-GRAFIX board TODAY!



EXCITEMENT & FUN

Open up a new realm of software development with the 80-GRAFIX board.

Available exclusively through PROGRAMMA at the cost of \$149.95
Please check with us for availability prior to ordering
VISA and MASTERCHARGE accepted
TRS-80 is a registered trademark of the Tandy Corp.

✓21


PROGRAMMA INTERNATIONAL, INC.

3400 Wilshire Blvd.
Los Angeles, CA 90010
(213) 384-0579 • 384-1116 • 384-1117

The MICROCONDUCTOR™

the ultimate
database manager
for your TRS-80® and Apple®

Compose Any Software Program
By simply answering the questions,
YOU Describe the file layouts
YOU Specify the print formats
YOU Design the update functions.
The CONDUCTOR DOES THE WORK!!!

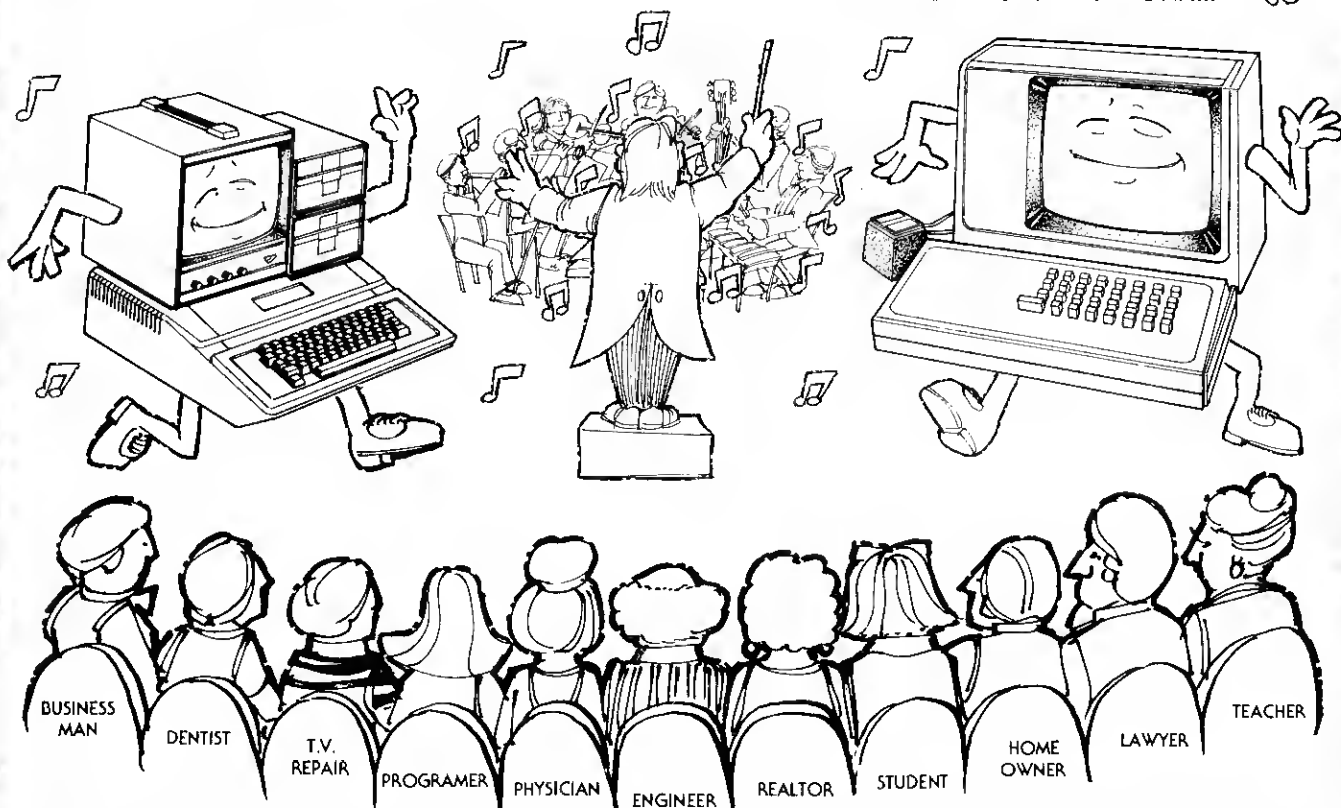

The MICROCONDUCTOR™ directs your computer to compose, organize and summarize all information you need to solve your software and business problems.

With The MICROCONDUCTOR™, your computer will be able to compose any record-keeping software you need. In the office, The MICROCONDUCTOR™ can help with anything from accounts receivable to property management. You'll find that The MICROCONDUCTOR™ is ideal for the shop too. Let it take care of your inventory records, sales analysis, price lists, and more.

The MICROCONDUCTOR™ is not just a file manager but a true Data Base Management System suitable for both the novice and professional users.

Some of the modules of this masterpiece are:

- DATA FILE—One step file creation. Just set it, and forget it.
- MAINT.— Manipulate your data files with ease; add, delete, modify, scan, relocate, and more.
- SORT— Sort any number of fields, in any sequence, ascending or descending order.
- UPDATE— Single or dual file report and update utility.

Introductory Prices

TRS-80® Model I.....	\$249
Apple®	\$299
TRS-80® Model II	\$399

The MICROCONDUCTOR™ is power at your fingertips! Power to set up, maintain, sort, report, and update data files at whim. Just imagine: with the MICROCONDUCTOR™, you can establish a custom mailing list system in 30 minutes, accounts receivable in 2 hours, a complete business system in only a few working days. Never before has your computer been given such power!

DATA FILES—No limit on the number of records a file can have.

FIELDS—Any type (string, integer, single, double). Eight entry modes (including defaults, counting, and suppress).

REPORTS—Four ways to generate reports. Total numeric column(s). Print on any paper in any format (statements, labels, etc.).

SORT—Any field(s) in any combination (i.e. multiple-key sort). Any size file, numeric or ASCII. Ascending or descending.

MAINT.—Command anticipation. Record duplication. Direct access and sequential search.

UPDATING/
MERGING—Add, subtract, multiply, divide fields. Combine results from previous calculations. Test for any condition and take action.

*Registered trade mark of Apple & Radio Shack.



**MICROCOMPUTER
TECHNOLOGY
INCORPORATED**



Apparat, Inc.

(313) 741-1771

3312 W. Woodward • Suite 101 • P.O. Box 1 • (714) 751-7223

7310 E. Princeton Ave. • Suite 101 • (313) 751-7225

ALL PRICES CASH DISCOUNTED

FREIGHT FOB/FACTORY

ASK FOR OUR FREE CATALOGUE

SAVE / add-ons for TRS-80® Software and Hardware

NEWDOS 80

A new enhanced NEWDOS for the TRS-80.

The most powerful Disk Operating System for the TRS-80, designed for the sophisticated user and professional programmer who demands the ultimate.

NEWDOS/80 is the planned upgrade from NEWDOS 2.1. Some of the features are:

- New BASIC commands for files with variable record lengths up to 4095.
- Mix or match drives. Use 35, 40 or 80 track 5" disk drives or 8" disk drives, or comba.
- Security boot-up for BASIC or machine code application programs.
- New editing commands.
- Enhanced RENUMBER that allows relocation.
- Command chaining.
- Device handling for routing to display and printer simultaneously.
- DFG function: striking of D, F and G keys allows user to enter a mini-DOS without disturbing program.
- Compatible with NEWDOS & TRSDOS.
- Machine language Superzap/80 2.1 utilities and enhanced debug and copy.

\$149

NEW

TF-8 80 TRACK DISK DRIVE

Double Your Capacity

\$639

TF-9 DUAL 80 TRACK DISK DRIVE


Quadruple Your Capacity

\$799

SUMMER CLEARANCE

\$70 FREE MERCHANDISE

with purchase of Shugart SA400 with power supply and chassis, the same disk that Radio Shack sells for \$499.




\$369

Announcing

8" Floppy Disk Drive System

for Model I

- One SA801 Floppy
- NEWDOS 80
- Cable & Adapter



\$1099

Disk Drive Sale!

Complete with power supply and chassis.

TF-Pentec FD200, 40 track, use both sides	\$389
TF-5 MPI B51, 40 track	\$389
TF-70 Micropolis 77 track with 195K storage	\$595
TDH-1 Dual Sided drive, 35 track	\$499
NEWDOS+ 40 track	\$110
35 track	\$99
Business Programs (Interactive A/R, A/P, & GL)	\$349
Mailing List	\$59
Disk Head Cleaner	\$16.95



Disk Drive Expansion System

- 2 Shugart SA400 drives with power/chassis
- 1 Two-Drive Cable
- 1 Expansion Interface 32K
- 1 35-track DOS+
- TOTAL LIST PRICE
- SPECIAL PRICE ONLY
- MOD II 8" Disk System
- 1 Drive System
- 2 Drive Expansion System
- 3 rd Drive

\$ 738

\$ 25

\$ 499

\$ 99

\$1,361

\$1,199

\$899

\$1,399

Add \$479

Drives for any Microcomputer

Does not include power supply & cabinet.

Pentec FD200	\$282	FD250	\$399
Shugart SA400	\$279	SA800/801	\$479
MPI B51	\$279	B52	\$349

Printers


Centronics 779	\$1,069
Base 2	\$ 599
Centronics 737	

Text processing capabilities, lower case descenders, underlining, subscripts and superscripts, 80 cps. **\$899**



Spinwriter **\$2,549**

More Savings



Introductory Offer—

Save \$250 TRS-80

Graphics Okidata

Microline 80 ...

List \$949

Our Price \$699

Memory Kit (16K)	\$69.00
AC Isolator (6 socket)	\$47.95
Modem	\$164.00
Diskettes (10)	\$30.00



Apparat, Inc.

(303) 741-1777


7311 E. Franklin Ave. • Denver, CO 80237 • (303) 728-7275



**MICROCOMPUTER
TECHNOLOGY
INCORPORATED**

3501 W. McArthur • Santa Ana, CA • (714) 770-0023

All prices cash discounted / Freight: FOB factory. Ask for our free catalog.

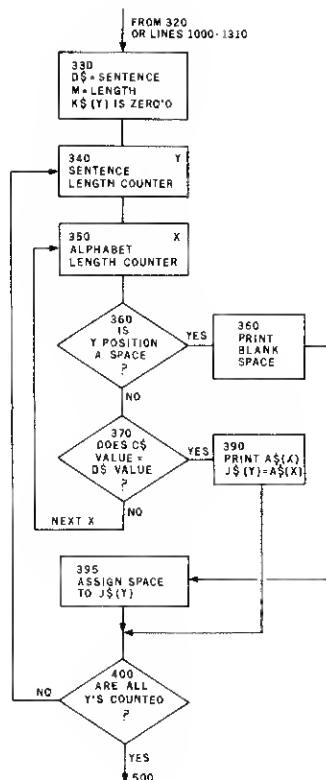

Print Sentence in Code

number.

Assume the next random number selected is the number 3. A\$(1) = E which fails the IF test at line 180 since 3 is the MID\$(C\$,B,1) value. At line 190, A\$(1) is not 0 so the line branches to line 230 and then to line 170 where an X value of 2 is generated. Lines 180 and 190 fail the IF tests so the value of A\$(2) becomes the letter C.


This section continues to select random numbers and loop through values of X until all 26 A\$(X) values have been assigned random letters of the alphabet. This array now holds the code.

The Sentence

Lines 270 through 320 give the user the option of either manually entering a sentence to be coded or letting the computer select a sentence at random.

At line 330, the length of the sentence, including spaces between words, is derived from the M = LEN(D\$) statement. The K\$(Y) array is then set to "" or empty spaces for the entire length of the sentence.

Lines 340 through 400 print the sentence in code. This is done in the following manner.

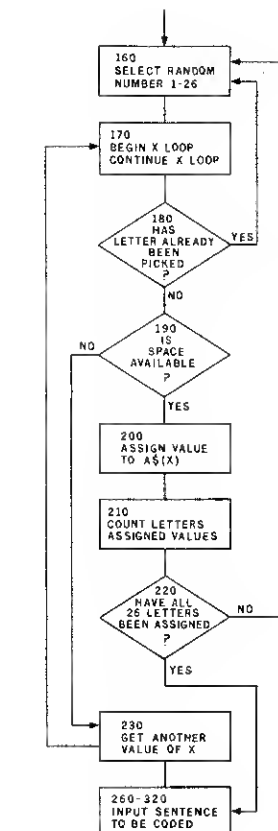

Create Code

At line 340 the Y counter selects the first position in the sentence. Line 350 selects the first X value and line 360 tests if the position in the D\$ sentence string is a space. If not, the program goes to line 370 where the X value in the C\$ is compared to the Y value in the D\$. The X counter continues to loop until a match is made.

Let's assume the first letter in the sentence D\$ is a C. The match occurs when X reaches a value of 3, since the third letter in the C\$ string is C. The program jumps upon a match to line 390. The value of A\$(3), which is a letter in the coded alphabet, is printed and also assigned to the J\$(1) position. The coded sentence is thus built up letter by letter and stored in the J\$(Y) array.

The program so far has created a code and applied that code to a sentence. All that remains is to provide a system of breaking the code. This is accomplished in lines 500 through 770. The user examines the coded sentence and determines potential substitutions. For example, a letter by itself is usual-

ly an A or an I.

At line 520 the coded letter to be changed is input as O\$. The letter to be substituted is then input at line 535 as N\$. The counter at line 540 sets up a scan of the entire coded sentence. At line 550 each value of J\$(Y) which corresponds to the letter the user wants changed is flagged and sent to line 580. This line reassigns the value of K\$(Y) to the new (N\$) letter.

After each letter of space in the sentence is checked by the Y counter, the program then prints the results with lines 600 through 670. The IF statements at lines 630 and 660 cause the program to print a line of coded sentence, a line of changes, then two similar lines below.

Lines 700 through 770 provide for user options at each run through of the code-breaking attempts. Lines 1000 through 1410 store the computer generated sentences.

Conclusion

The program has gained instant popularity with family and neighbors alike. Once a person gets hooked as an amateur cryptanalyst, it is extremely hard to keep him away from the computer.

Although the code system used is not as complex as the one broken by the Germans during the Ploesti raid, it will provide a challenge to all who use the program. ZCCA FYPO WOA GOXCN! ■

Program Listing.

```

10 CLS:PRINT@25,"CRYPTO"
20 PRINT:CLEAR 500
30 PRINT"THIS PROGRAM WILL CREATE SECRET MESSAGES USING
  A DIFFERENT
40 PRINT"CODE EACH TIME. TWO PLAYERS CAN PLAY OR ONE PL
  AYER CAN TEST
50 PRINT"HIS/HER CODE-BREAKING ABILITY AGAINST THE COMP
  UTER. THE GAME
60 PRINT"IS EXACTLY LIKE THOSE FOUND IN DAILY NEWSPAPER
  S AND MAGAZINES
70 PRINT"IN THAT A CODED SENTENCE IS PRESENTED AND THEN
  BROKEN BY
80 PRINT"ANALYSIS OF STRUCTURE AND LETTER SUBSTITUTION.
  ":PRINT
90 PRINT"THE COMPUTER IS BUSY COMPILING THE CODE AND WI
  LL SIGNAL
100 PRINT"YOU WHEN READY. IT TAKES LESS THAN 30 SECONDS
  ":
110 DIM A$(30),J$(150),K$(150): A$(30)=" "
115 REM A$ IS CODE, J$ HOLDS CODED SENTENCE, K$ HOLDS C
  ODE BREAKING
120 C$="ABCDEFGHIJKLMNOPQRSTUVWXYZ"
125 REM SET A$ TO ZERO
130 FOR X=1 TO 26
140   A$(X)="0"
150 NEXT X
160 B=RND(26): REM SELECT RANDOM ALPHABET VALUE
170 FOR X=1 TO 26
180   IF A$(X)=MID$(C$,B,1) THEN 160: REM IS LETTER AL
  READY
  PICKED?
190   IF A$(X)<>"0" THEN 230: REM IS THERE SPACE AVAIL
  ABLE?
200   A$(X)=MID$(C$,B,1): REM ASSIGNS CODED LETTER TO
  AS
210 N=N+1: IF N=26 THEN 260: REM COUNTS LETTERS PLAGINS
  TRD
220 GOTO 160
230 NEXT X
260 FOR X=1 TO 26:PRINTA$(X);:NEXT:REM CAN SEE CODE HER
  E IF
  DESIRED
270 CLS:PRINT"OK,THE COMPUTER IS SET. TYPE 1 TO PLAY AG
  AINST THE
280 PRINT"COMPUTER, TYPE 2 FOR TWO PLAYERS."
290 Z$=INKEY$:IF Z$=""THEN 290
295 IF Z$="1" THEN 1000
300 PRINT:PRINT"FIRST PLAYER, ENTER SENTENCE TO BE CODE
  D. DO NOT"
310 PRINT"SHOW TO THE OTHER PLAYER. DO NOT USE ANY PUNC
  TUATION.
315 PRINT"TYPE AND ENTER YOUR SENTENCE NOW..."
320 INPUT D$
330 CLS: M=LEN(D$): FOR Y=1 TO M: K$(Y)=" ": NEXT
335 REM THE ABOVE SETS THE CODED SENTENCE ARRAY (K$) TO
  BLANKS
340 FOR Y=1 TO M
350   FOR X=1 TO 26
355     REM IS THE LETTER OF THE D$ SENTENCE A SPACE BETWEE
      N WORDS?
360     IF MID$(D$,Y,1)=" " THEN PRINT " ";GOTO 395
365     REM MATCH VALUE OF LETTER IN SENTENCE WITH NORMAL A
  
```

```

LPHABET
370 IF MID$(C$,X,1)=MID$(D$,Y,1) THEN 390
380 NEXT X
390 PRINTA$(X);: J$(Y)=A$(X): GOTO 400:REM PRINT AND AS
SIGN
CODES
395 J$(Y)=" ":REM ASSIGN BLANK SPACE BETWEEN WORDS
400 NEXT Y:REM GO BACK FOR ANOTHER LETTER
500 PRINT:PRINT"THE ABOVE SENTENCE CAN BE DECODED BY DI
RECT SUBSTITUTION."
510 PRINT"SELECT LETTER TO BE CHANGED..."
520 INPUT"WHAT IS THE LETTER YOU WANT TO CHANGE";O$
530 PRINT"CHANGE " O$ " TO WHAT LETTER? A DOUBLE QUOTE W
ITH ONE
535 PRINT"SPACE IN BETWEEN THE QUOTES WILL PRINT A BLAN
K SPACE.":INPUT N$
540 FOR Y=1 TO M
550 IF J$(Y)=O$ THEN 580:REM CHECK J$ FOR SELECTED L
ETTER
560 IF K$(Y)=" " THEN 590:REM CHECK FOR EMPTY SPACE
570 K$(Y)=K$(Y): GOTO 590:REM HOLD VALUE
580 K$(Y)=N$:REM ASSIGN NEW LETTER TO CODED SENTENC
E
590 NEXT Y
600 CLS:PRINT"HERE IS THE CODED SE-TENCE WITH YOUR SUBS
TITUTIONS."
610 PRINT: N=1
620 FOR Y=N TO M: PRINTJ$(Y);:REM PRINT CODED SENTENCE
630 IF Y=64 THEN 650:REM CHECKS SCREEN LIMIT
640 NEXT Y:PRINT
650 FOR Y=N TO M: PRINTK$(Y);:REM PRINTS CHANGES
660 IF Y=64 THEN 680
670 NEXT Y:PRINT: GOTO 690
680 N=65: GOTO 620:REM SETS UP FOR NEXT LINES OF CODE A
ND CHANGES
690 PRINT:PRINT"FOR FURTHER CHANGES TAP THE 'Y' KEY.
695 PRINT"TO START OVER WITH THIS CRYPTO, TAP THE 'N' K
EY."
700 PRINT"FOR ANOTHER GAME TAP THE 'A' KEY.
710 PRINT"TO END THE GAME TAP THE 'E' KEY."
720 M$=INKEY$: IF M$="" THEN 720
730 IF M$="Y" THEN 500
740 IF M$="A" THEN 10
750 IF M$="E" THEN 999
760 IF M$="N" THEN 330
770 PRINT"I DON'T UNDERSTAND, TRY AGAIN. TAP Y,N,A, OR
E.":GOTO720
999 CLS:PRINT"SO LONG FOR NOW.":END
1000 L=RDND(2):REM SELECT RANDOM SENTENCE FOR CODING

```

```

1010 ON L GOTO 1100,1300
1100 L=RDND(10)
1110 ON L GOTO 1120,1130,1140,1150,1160,1170,1180,1190,
1200,1210
1120 D$="THE LOVE OF JUSTICE IN MOST MEN IS SIMPLY THE
FEAR OF SUFFERING INJUSTICE":GOTO 330
1130 D$="SILENCE IS THE BEST TACTIC FOR HIM WHO DISTRUS
TS HIMSELF":GOTO 330
1140 D$="THINGS ARE ALWAYS AT THEIR BEST IN THEIR BEGIN
NING":GOTO 330
1150 D$="ALL MEN WOULD BE TYRANTS IF THEY COULD":GOTO 3
30
1160 D$="ONCE A WOMAN HAS GIVEN YOU HER HEART YOU CAN N
EVER GET RID OF HER":GOTO330
1170 D$="HE WAS A BOLD MAN THAT FIRST EAT AN OYSTER":GO
TO 330
1180 D$="MAY YOU LIVE ALL THE DAYS OF YOUR LIFE":GOTO 3
30
1190 D$="A BIRD IN THE HAND IS WORTH TWO IN THE BUSH":G
OTO330
1200 D$="ASK NOT WHAT YOUR COUNTRY CAN DO FOR YOU BUT W
HAT YOU CAN DO FOR YOUR COUNTRY":GOTO 330
1210 D$="EXPERIENCE IS THE NAME EVERYONE GIVES TO THEIR
MISTAKES":GOTO 330
1300 L=RDND(10)
1310 ON L GOTO 1320,1330,1340,1350,1360,1370,1380,1390,
1400,1410
1320 D$="IT IS BETTER TO REMAIN SILENT AND BE THOUGHT O
F AS A FOOL THAN TO SPEAK AND REMOVE ALL DOUBT":GO
TO 330
1330 D$="THE APPLAUSE OF A SINGLE HUMAN BEING IS OF GRE
AT CONSEQUENCE":GOTO 330
1340 D$="IT IS BETTER TO LIVE RICH THAN TO DIE RICH":GO
TO 330
1350 D$="A PRETTY FOOT IS A GIFT OF NATURE": GOTO 330
1360 D$="A MEAL WITHOUT WINE IS LIKE A DAY WITHOUT SUNS
HINE":GOTO 330
1370 D$="ASK YOURSELF IF YOU ARE HAPPY AND YOU WILL CEA
SE TO BE SO": GOTO 330
1380 D$="GOSTRING$ MADE INTEGERS ALL ELSE IS THE WORK O
F MAN":GOTO330
1390 D$="WAR IS MUCH TOO SERIOUS A MATTER TO BE ENTRUST
ED TO THE MILITARY":GOTO 330
1400 D$="WHEN YOU ARE FLAT ON YOUR BACK THERE IS NO PLA
CE TO LOOK BUT UP":GOTO 330
1410 D$="THE ONLY WAY TO GET RID OF A TEMPTATION IS TO
YIELD TO IT": GOTO 330

```

TRS-80*

Software Exchange

- Cash & royalties for original programs—science, business, games, education.
- No risk.
- Join our co-op & share your programs with others and vice-versa!

Programs must be original!
For complete info, clip & mail to:

Software Exchange

P.O. Box 42407 ✓284

*** Portland, Oregon 97242**
"TRS-80 is a registered trademark of TANDY CORP."

Name _____
Add. _____
City _____
State _____
Zip _____

ANNOUNCING THE FIRST TRUE ELECTRONIC MUSIC SYNTHESIZER FOR THE

TRS-80*

NOT A SIMPLE SOUND EFFECTS
GENERATOR BUT A COMPLETE

MUSIC SYSTEM!

TRS-80* Synthesizer

- 3 SIMULTANEOUS NOTES PER BOARD
- PLUGS INTO ANY STEREO SYSTEM
- NO EXPANSION INTERFACE NEEDED
- DEMO CASSETTE INCLUDED

\$130 KIT

\$190 ASSEMBLED

DEMO CASSETTE \$3.00 SEPARATELY

MUSIC EDITOR

ENTER SHEET MUSIC VIA WELL TESTED ENTRY SYSTEM

\$10 CASSETTE

\$15 DISK

TRS-80 Hardware:

2 Plug in Game Paddles 74.95
Lowercase Modification 18.95
Light Pen 19.95
Beeper 25.00

NEW WAVE ELECTRONICS, INC.

CUSTOM PROGRAMMING
AND
SYSTEM DESIGN

✓323

ALL ORDERS POST PAID
COD'S REQUIRE 30% DOWN
VISA ACCEPTED

TR-80 is a registered trademark of Tandy Corp.

P.O. BOX 7245
METairie, LA 70002
(504) 885-8914



now you can

RAISE
and tilt your monitor for
more comfortable
viewing, and
COVER
that unprofessional tangle
of cabling and power
supply. The

"80-SHROUD"
is a matching silver-gray
molded fiberglass module
that fits under the
"80" monitor.

\$22.50 + \$2.00 shipping and
handling with check or money
order. NYS residents add 7% tax.

SYRACUSE R&D CENTER
Box 125, DeWitt, N.Y. 13214

"our 10th year in R&D" ✓350

A fine component interface for your television set.

Cheap Video

Paul C. Fowler, Jr.
Inland Motor IDD
609 Rock Road
Radford, VA 24141

Dennis J. Murray
1005 Chestnut Drive
Cristiansbury, VA 24075

A few months ago I bought a TRS-80 mainframe, hooked a video modulator to my old black and white and found at 64 characters per line I had only hieroglyphics. At 32 characters per line I could decipher words and letters satisfactorily.

After the initial excitement of having my own computer wore off, I needed to do something about my 64 characters per line problem, so I said good-bye to the indistinct world of modulators and found myself in the fuzzy world of direct video interface.

With a commercial direct interface device the resolution of 32 characters per line was just fine and 64 characters per line was readable but uncomfortable.

Nothing was wrong with my \$25 interface device, but with all those capacitors and things in my video section my TV's slew rate was too slow. So, what to do? Break down and buy a monitor? There's got to be a better way. There is...! And it's simple too.

After a lot of talking and experimenting, the co-author and I came up with the circuit in Fig. 1a.

How the Circuit Works

Transistor Q1 serves as an emitter follower whose quiescent state (and thus the white level) and relative gain is determined by the setting of R1, which interacts somewhat with the set's contrast and bright-

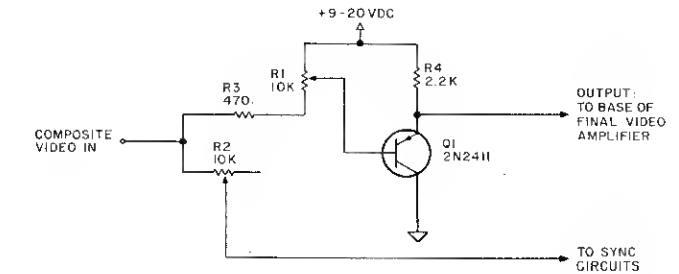


Fig. 1b

ness controls.

Potentiometer R2 adjusts the signal level passed to the TV's sync circuits avoiding synchronization problems caused by overdriving those stages.

Beautiful! Only five components to scrounge and the resolution is excellent. There is one drawback: The TV must be isolated. But one can buy an isolation transformer for just a few dollars and overcome this problem.

If an inverted video signal is desired, replace Q1 with an NPN and series its emitter to ground with a 2.2K resistor (Fig. 1b). Almost any small signal transistor will do.

A typical set is shown in Fig. 2. As good TV sets and good monitors are not usually compatible, I am assuming that this monitor will never again be a television.

Disable everything upstream from X1 and X2. Insert the interface output at X1, and the sync

at X2. Vcc should be somewhere between 9 and 20 volts (I used 12 VDC on my Sony Model #TV-1104). You can tap this from one of your set's biasing supplies. Set P1 and P2 to the center positions and inject the composite video into the interface. Also, set your horizontal control and brightness controls for good definition.

To fine tune the picture, fill the screen with zeros. Adjust the height and vertical linearity controls until the characters are all equal size and they fill the screen from top to bottom.

You may find that the data lines do not properly fit on your TV's screen—either the lines are too short or too long. This can be remedied in several ways; if you are lucky you have an adjustable horizontal frequency coil in your set. Adjust it carefully with an insulated alignment tool until you reach a satisfactory line width. If you are unlucky your set has no ad-

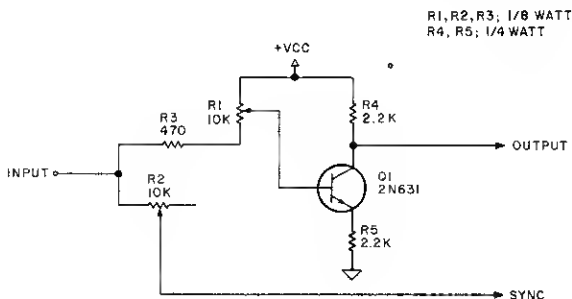


Fig. 1a

justment.

Don't panic! Your horizontal oscillator must have some frequency determining network and it can be changed. Usually it is an L-C arrangement, although R-C networks aren't uncommon. By altering either one or both of those components, your scan frequency, and thus the line width, can be changed.

Another alternative is to change the horizontal scan frequency by changing the horizontal output stage time-constant. This is accomplished by adding or subtracting capacitance until the picture reaches the desired width (Fig. 3).

Conclusion

Get a SAM'S PHOTO-FACS for your TV. Not having one is

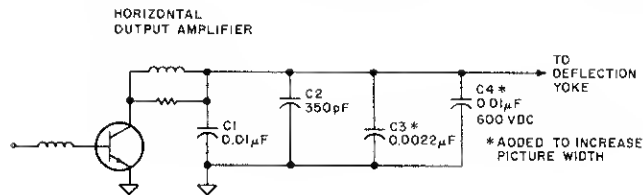


Fig. 3

like exploring a cave in the dark. Use coax cable for all signal runs. To reduce stray capacitance, keep components as close together and as small as possible. I recommend using dual 10K pots in the 8 Pin Dip Package. O1 is any moderate gain PNP transistor whose reverse breakdown voltage is greater than Vcc.

Finally, and most importantly —DON'T OPEN UP YOUR SET without some knowledge of what's going on inside. If you don't know how a TV works, get someone to help you. Otherwise, you may shake hands with the high voltage rectifier and see hieroglyphics for some time. ■

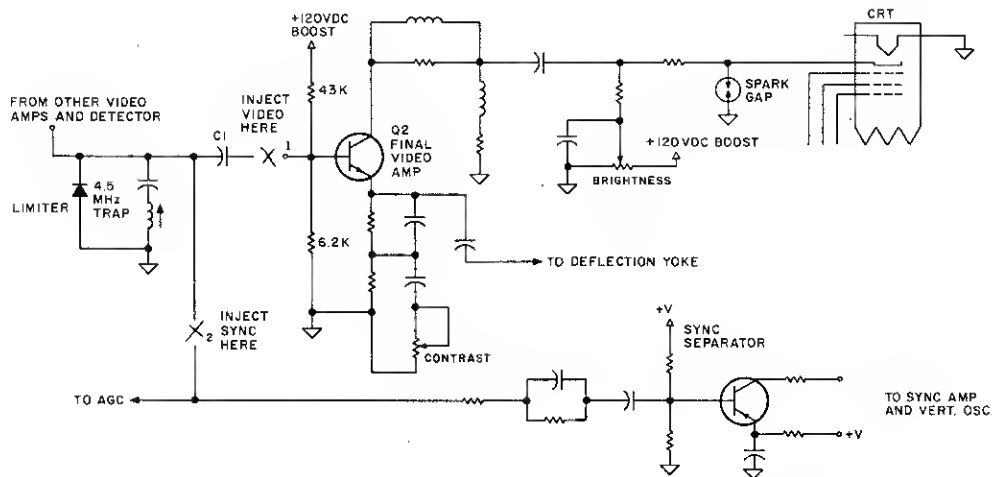


Fig. 2

PSG-80 A Programmable Music and Sound Synthesizer

MSL A Programming Language for Music and Sound Effects

PSG-80—implements what we believe to be the most powerful single chip music and sound synthesizer available today, the General Instruments AY-3-8910. This LSI can simultaneously produce 3 different tones each at a different volume. Plus, it has envelope and noise generators for producing more complex sounds. PSG-80 also contains its own on board amplifier. Requires 2 ports.

MSL—is a Music and Sound effects Language which enables everyone to quickly utilize the powerful resources of the PSG-80. The Language was written to support many PSG-80's simultaneously and contains many special purpose statements, plus many traditional programming structures such as nested loops.

PPI-80—utilizes Intel's 8255 to provide three parallel I/O ports for the TRS-80 and can be connected via the screen printer location on the expansion interface or to the expansion bus at the rear of the keyboard.

PSG-80 plus MSL..... \$149.00
PPI-80..... \$119.95

S.C. residents add 4% sales tax
Overseas orders add \$5 for shipping

Quant Systems
✓269

p.o. box 626
charleston sc
29402

amp --freq-- LEVEL II SOUND STX

REAL TIME DISPLAY
OF SOUND INPUT WITH
RECORDER MIKE
MACHINE LANGUAGE
PROGRAM LISTING OF
LESS THAN 100 BYTES
FULL LOUDNESS DEPTH
FROM UNMODIFIED '80
WITH CTR-41 RECORDER
DISPLAY MOVES TO
MUSIC OR VOICE
FOR EXPERIMENTS OR
LAZY VIEWING SEND
6.00 CK OR MO WITH
STAMPED SELF AD-
DRESSED ENVELOPE TO

EDF ✓359
BOX 3054
BRANFORD CT.
06405

Disk Based Word Processor \$7.50

A complete word processing system for your TRS-80 including full editing features such as paragraph move, line deletion, insertion & line correction. Store text on disk, print business and personal letters, reports with numbered pages and title pages! Text stored on disk as blocks are created so texts are not limited by the available memory. The PENSADYNE word processor is for 16K single-drive TRS-80s and comes complete with software to produce upper/lower case at printhead, and keyboard reverse. Full right/left justification and much more. Send cheque, money order or order by phone, 24 hours, 7 days a week. Mastercard and Visa welcome. Manual only, \$1.75—deductible from cost of software.

ORDER NOW!!

PENSADYNE ✓207
COMPUTER SERVICES

4441 WEST FIRST AVE.
VANCOUVER, B.C., V6R 4H9

604-224-3107



Limit access to your machine code subroutine, with this software combination lock.

Software Lock

M. D. Kelleher
79 City View Way
San Francisco, CA 94131

For those TRS-80 users who enjoy working with machine language (and enjoy a little software intrigue on the side), this article describes a short utility subroutine that provides restricted access to your own machine language programs through the use of a predefined user code.

The subroutine, SOFTPROT, is written for 32K DOS and is automatically loaded into memory on power-up or reset using the TRSDOS AUTO function (Listing 1).

Software Theory

The theory of SOFTPROT is as simple as a James Bond movie. A user code (top secret, of course) is requested as the first step in each machine language program from which the SOFTPROT subroutine is called. This code request must be answered with the proper keyboard characters, and in the proper sequence, before the subroutine loop can be broken and the main program routines accessed.

Should the wrong code be entered, or the correct code be entered out of sequence, the SOFTPROT loop continues.

(This should be frustration enough for even the most devious arch-criminal, if a complex code is used.)

SOFTPROT uses a three-level code requiring the input MDK, however, the routine can easily be expanded to accommodate any number of code levels. Once the correct code sequence is entered, SOFTPROT returns control to the user's machine language program by way of the assembler instruction RET.

The program is initialized at hex address BE00 but can easily be reconfigured for a 16K TRS-80 by assembling the subroutine with a hex starting address of 7E00.

In either configuration, make sure that the machine language program using SOFTPROT does not extend beyond hex BDFF in a 32K machine or 7DFF in a 16K machine. If so, SOFTPROT will be wiped out!

Here are the procedures for setting up SOFTPROT, depending upon your TRS-80 hardware configuration:

In a 32K DOS system, assemble the program using the editor/assembler and save the object file (the machine language code itself) to disk under the filename "SOFTPROT/CMD". Now, using the TRSDOS or NEWDOS + AUTO function, enter this command:

AUTO LOAD SOFTPROT/CMD

from the DOS mode. Each time you power-up or reset the TRS-80 using this diskette, SOFTPROT will automatically be loaded into memory beginning at hex address BE00.

With a 16K DOS system the only changes you must make to SOFTPROT itself are in the first and last program lines (the ORG and END instructions). Change the addresses at these lines to hex 7E00. The remainder of the program uses relative jumps so that you may relocate it anywhere convenient in memory.

Putting SOFTPROT into Action

Once you have SOFTPROT assembled and ready to run, the rest of the operation is a piece of cake. To use SOFTPROT, add the following command as the first executable program statement of any machine language program:

```
CALL 0BE00H (for 32K machines)
or
CALL 07E00H (for 16K machines)
```

The result of this command is to call SOFTPROT before accessing the remainder of your machine language program. Once SOFTPROT is called, the proper user code must be entered from the keyboard before execution of the main program begins.

Experiment with SOFTPROT and you will find several ways in

which to use it. Here are a few suggestions:

1) Try calling SOFTPROT from your BASIC programs by using the DEFUSR function. A typical Disk BASIC program might begin like this:

```
10 CLS
20 PRINT "SAMPLE PROGRAM"
30 DEFUSR 0 = &HBE00
40 X =USR 0(X)
```

This same format can be used in Level II machines by changing the DEFUSR statement address to the proper decimal equivalent for your version of SOFTPROT. If you're really wild about user codes, you can even find some very esoteric ways of hiding lines 30 and 40 with the ASC or STR functions of DISK or Level II BASIC.

2) Alter the required user code in different versions of SOFTPROT to match the particular machine language program you will be using it with.



3) Experiment with access codes using SOFTPROT. For example, establish a 5 or 6 level code (ABCDEFGH) where the correct entry of, say, one half of the code allows access to a portion of your program; whereas, only the full code complement allows total program access.

4) And here's a finale for you 007 freaks. How about using SOFTPROT in such a way that a

At any rate, you should be able to come up with fascinating innovations between spy novels. If nothing else, SOFT-PROT is an interesting introduction to the intrigue of machine language programming.

Good afternoon, Mr. Phelps. ■

Program Listing. SOFTPROT

Alpha ✓ 69   **Byte**
Storage **4636 Park Granada 159**
91302 (213) 883-8594
Calabasas, California

Now In Stock And Ready For Delivery NEW TOYS FOR YOUR TRS 80* MICROCOMPUTER

SHORT MEM™

ADD 1K OF MEMORY TO YOUR COMPUTER THAT DOESN'T FORGET. (AS LONG AS YOU KEEP SHORT MEM™ PLUGGED IN) THIS READ/WRITE MEMORY IS A GOOD PLACE FOR YOUR UTILITIES OR IMPORTANT VARIABLES IN AN UNTOUCHABLE LOCATION.

FEATURING:

- EXTERNAL PLUG IN MODULE (KEYBOARD OR EXPANSION INTERFACE) STARTING ADDRESS (3000 HEX)
- INSTANT ACCESS TO MEMORY CONTENTS UPON POWER UP
- USES UNASSIGNED AREA OF MEMORY (NO CONFLICT WITH OTHER OPERATING SOFTWARE)
- COMPATIBLE WITH EITHER LII OR DISK OPERATING SYSTEMS
- NO BATTERIES TO RUN DOWN OR HAVE TO REPLACE

SAVE

★ **INTRO SPECIAL \$123.95** ★ **REGULARLY \$150.00** ★

THIS UNIT WILL PLUG INTO THE BACK OF THE LEVEL II KEYBOARD OR E.I. WITH NO EXTRA PARTS NEEDED. COMES COMPLETE WITH IT'S OWN AC POWER ADAPTER.

OTHER NEW ITEMS FROM LEVEL IV

8-4116 MEMORY CHIPS FOR KEYBOARD OR INTERFACE - LIMITED SUPPLY. AS LOW AS \$60.00
SHUNTS & INSTRUCTION --ADD \$5.00

MONSTERS LAIR ADVENTURE (FULL GRAPHIC MACHINE LANGUAGE) \$19.95 DISK \$14.95 CASSETTE
LP SPOOLER \$39.95

SINGLE POWER SUPPLY AND CASE FOR DISK DRIVE WITH EXTENDER CABLE CUSTOM MADE FOR US FOR THE B 91
AND B 51 MPI DISK DRIVES (DEALER INQUIRIES INVITED ON THE UNIT) \$75.00

MPI B91 (80 TRACK) WITH POWER SUPPLY AND CASE (AND IF IT IS READY OUR 80 TRACK OPERATING SYSTEM (AT
LEAST I'M HONEST)) I'LL GIVE YOU A HINT (A MODIFIED TRS-DOS) \$650.00

DISASSEMBLED HANDBOOK VOL 1 (TRS ROM) \$10.00

DISASSEMBLED HANDBOOK VOL 2 (EXTENSION OF ABOVE) \$15.00

BOTH FOR ONLY \$19.95

RESET BUTTON (STOP USING THAT PENCIL) \$ 3.99

MICRO LINE 80 PRINTER \$699.00

TRACTOR WHEN ORDERED WITH PRINTER \$100.00

CABLE FOR ABOVE TO E.I. \$30.00

*THESE PRICES MAY BE HIGHER IN OUR RETAIL STORES

SOFTWARE:

MATCH BOOK FOOTBALL WITH SOUND \$ 9.95

CRUSHBUGG WITH SOUND \$14.95

INVADERS PLUS 4K LEVEL I AND UP WITH SOUND \$19.95

INVADERS PLUS DISK WITH STEREO SOUND \$24.95

SOUND AMPLIFIER \$10.95

BOSS SYSTEM UTILITY \$29.95

PINBALL BY ACORN (SUPER PROGRAM) \$14.95

PINBALL DISK \$20.95

IRV (THE SUPER KEYBOARD) \$24.95

SARGON II DISK \$34.95

CASSETTE TAPES THAT NIXON WON'T LIKE (OURS HAVE NO DROP OUTS) \$1.00 EA OR 10 FOR \$7.50 (THESE ARE THE
TYPE RECOMMENDED FOR THE TC-8 (POOR MAN'S FLOPPY))

HARDSHELL CASES FOR THE ABOVE TAPES THE GOOD ONES 20 EA

SYSTEM RELOCATOR FOR THE POOR MAN'S FLOPPY. RELOCATES THE SYSTEM FOR ANY MEMORY SIZE. PERMITS THE
USE OF ANY MACHINE LANGUAGE PROGRAMS ABOVE IT. \$14.95

COMING SOON "THE 16K LEVEL IV" WATCH THIS SPACE FOR MORE

DETAILS!!!!!!

VISA MC

COD (CERTIFIED CHECK OR CASH ONLY)

10% DISCOUNT ON PREPAID ORDERS (SOFTWARE ONLY)

PLEASE ADD \$2.50 SHIPPING OR 2% OF TOTAL PRICE WHICHEVER IS HIGHER FOR SHIPPING AND
HANDLING

**TRS-80 IS A PRODUCT OF THE RADIO SHACK A DIVISION OF TANDY CORP.

LEVEL IV PRODUCTS, INC.

Your source for the best in
TRS-80* * software and hardware

32230 Schribercraft, Suite F-1 • Livonia, Michigan 48150 • (313) 525-6200

Out of Michigan call 1-800-521-3305

A soft approach to LC generation.

Lowercase With Strings Attached

Milan D. Chepko, M.D.
119 Belleville Crt.
Thief River Falls, MN 56701

The original TRS-80 system uses only uppercase letters, which can be somewhat restrictive when typing text. The keyboard can generate the lowercase letters by using the shift key, but the screen and the Centronics 779 printer can display only the uppercase form, even though the ASCII code for the lowercase letter is stored in memory. That is why shifted letters can cause so much trouble in a program listing.

Some of the other line printers on the market can handle the

lowercase code and produce acceptable text without any hardware modification. Unfortunately, it becomes confusing when you try to enter any significant amount of text, since you have to key it in just the opposite of a regular typewriter.

This simple subroutine eliminates at least some of the difficulty. In essence, it accepts a string from the keyboard, then inspects each of the characters to see which ones have been typed with the shift key. It then unshifts the shifted ones, and

shifts the unshifted ones. If that sounds strange, remember that the TRS-80 considers any key typed without the shift to be an uppercase letter, while any key typed with the shift becomes a lowercase letter. This routine just reverses the process.

Because it is written in BASIC, it tends to be a little slow, and you may notice a slight delay before the prompt appears for the next line of input. Also, be careful to select variables that don't appear in the program text, or you may lose data accidentally.

Be sure to CLEAR enough space for the extra strings at the beginning of the program. Call the subroutine with a GOSUB just after you INPUT X\$, and, on returning, the modified string will be in O\$.

```
10000 *** SUBROUTINE TO GENERATE LOWER-CASE CHARACTERS
10010 BY MILAN D. CHEPKO, M.D.
10020 THIEF RIVER FALLS, MN
10030 /
10040 SUBROUTINE USES THE FOLLOWING VARIABLES:
10050 X$-----CONTAINS THE STRING VARIABLE AS INPUT FROM THE KEYBOARD
10060 O$-----CONTAINS THE STRING VARIABLE ON RETURN FROM THIS SUBROUTINE
10070 A-----THE NUMBER OF CHARACTERS IN THE INPUT STRING
10080 C-----USED TO HOLD EACH ELEMENT OF THE STRING SEQUENTIALLY
10090 B-----COUNTER
10100 /
10110 A=LEN(X$):O$="":IF X$="" RETURN
10120 FOR B=1 TO A:C=ASC(MID$(X$,B,1))
10130 IF C=64 AND C<91 THEN C=C+32:GOTO10150
10140 IF C>95 THEN C=C-32
10150 O$=O$+CHR$(C)
10160 NEXT B:RETURN
```

Subroutine to Generate Lowercase Letters.

from **ELCOMPCO** **DUAL DISK DRIVE CASE KIT** ✓ 63 for Shugart, MPI, & other minis

includes


- CHASSIS
- PLEXIGLASS COVER
- ALL PARTS POWER SUPPLY

(Disk Drives & Connecting Cables—extra)

Easy Assembly (1-2 hrs.)
Enough Power for 2 Mini Drives
use one now—one later

\$125

Block off for Drive—\$5 extra
DEALER INQUIRIES INVITED

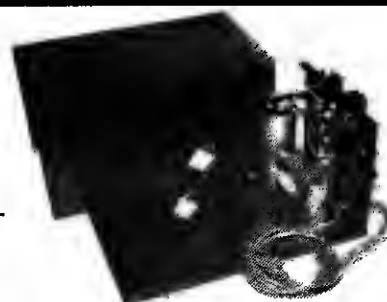

COMPLETED UNIT

ELCOMPCO
Microcomputer Peripherals
Post Office Box 6133
C.O.D. Albany, CA 94706



*Make your Editor/Assembler
do the things you want it to—with this modification.*

Custom EDTASM

John T. Blair
122 Dumont Ave.
Norfolk, VA 23505

This article explains how to incorporate several changes in the Editor/Assembler from Radio Shack. I'll be talking about: An auto line and form feed option for printers using a 37E8H printer interface; how to change the "lines per page reference"; incorporating Small System Software's TRS-232 printer driver; adding a form feed routine to the TRS-232 printer program; letting EDTASM honor "protected memory"; changing the EXIT from EDTASM so BASIC is reentered without going to memory size; how to reenter EDTASM and maintain your source program text.

To modify the EDTASM you will need a monitor, such as RSM-1 or RMS-2D, MON3 or T-BUG. One caution: You must not execute the EDTASM program if you are loading it to insert a modification. There are

two ways of modifying EDTASM.

First, you can load the EDTASM program using the SYSTEM command and then load your monitor. Since the monitor is the last program entered, when you type "<ENTER>", you will be in your monitor and ready to make any of the modifications.

Referring to the source listing of the modifications you wish to implement, delete (fill with zeros, 00H) the sections of the programs that are to be changed. Try the "Zero" command in your monitor. This will let you see easily where you are working or if you have run out of room. Enter the hex code for the desired modification. After inserting the new program, save the modified EDTASM program using the PUNCH command. The starting point for EDTASM is 4300H, its ending address is 5520H, and the entry point (cold start) is 468AH.

An alternative method is to write the various programs using the EDTASM and to save the source and object codes. Then, using the SYSTEM command, load the EDTASM program. Load the object code for the patch. (Because of the ORG

statements, the modification will overwrite the required sections of coding.) Finally, load your monitor and PUNCH a copy of the modified EDTASM.

The Secret of Gaining Control

To modify any of the I/O routines (i.e., keyboard, video or printer) you must first take control of the EDTASM's old driver. Control can be taken from the old driver and linked or patched to the new routine by changing the address in the Device Control Block (DCB).

The EDTASM has its own DCB's, and its own CRT, keyboard and printer driver routines. The DCB's are located at:

- 1) 4300-4307H Keyboard
- 2) 4308-430FH Video
- 3) 4310-4317H Printer

The various drivers routines are located at:

- 1) 43EF-445FH Keyboard
- 2) 4460-45A9H Video
- 3) 45AA-45F5H Printer

The Device Control Blocks tell the system:

Byte Description

- 0 Whether the DCB is an input or output function,
- 1-2 Address on the driver for that function,
- 3-5 Scratch pad memory for that function,
- 6-7 The ASCII name of that

device (i.e., PR = printer).

These various Device Control Blocks are used by the routines in the EDTASM. As in BASIC, a General INPUT/OUTPUT driver, located 43CE-43EFH in the EDTASM and 03C2-03E3H in BASIC, saves the registers (EXCEPT the DE), then gets the address of the driver from the DCB, and jumps to the driver.

So by changing the address contained in the DCB the driver can be changed.

37E8H Printer/Interfaces

The biggest problem here is in the printer driver routine which does not insert a line feed after a carriage return, nor does it output a "top of form." In BASIC, a OCH can be outputted to give a top of form, but not in the EDTASM.

The printer driver which resides from 45AA to 45F5 (see Listing 1), is identical to that in ROMs. If you are using a printer interface which is located at 37E8(H), you can insert a line feed after a carriage return with a simple modification (see Listing 2).

Referring to Listing 1, if the character to be printed is a 0DH, <CR>, the program jumps to the "Output Character" (OUTCHR)

Listing 1. Disassembled Printer Driver.

```

00100 *****
00110 ; EDTASM'S PRINTER DRIVER SOURCE *
00120 *****
00130 ;
00140 ; DISASSEMBLED BY JOHN T. BLAIR WA4CHZ
00150 ;
00160 *****
00161 ;* ALL REG'S ARE SAVED (EXCEPT *
00162 ;* THE 'DE') BEFORE ENTERING *
00163 ;* THIS ROUTINE. THE CHARACTER *
00164 ;* TO BE PRINTED IS IN THE 'A' *
00165 ;* REG. *
00170 ;* THE IX REG. IS SET TO 4310H *
00180 ;*BY THE CALLING ROUTINE. THIS *
00190 ;*IS THE PRINTER DEVICE CONTROL *
00200 ;*BLOCK, AND IS EQUIVILANT TO *
00201 ;*THE ONE LOCATED AT 4025H FOR *
00202 ;*ROMS. FOR MORE DETAILS SEE *
00203 ;*APPENDIX " D " IN THE LEVEL II *
00204 ;*MANUAL. *
00230 *****
00233
45AA 00240 ORG 45AAH ;STARTING LOCATION
45AB 79 00250 LD A,C ;GET CHAR TO BE PRINTED
45AB B7 00260 OR A ;CK IT FOR NULL (00H)
45AC 2840 00270 JR Z,STATUS
45AE FE0B 00280 CP 0BH
45B0 280A 00290 JR Z,45BCH
45B2 FE0C 00300 CP 0CH ;IS IT <FF> FORM FEED?
45B4 201E 00310 JR NZ,OUTCHR ;JP TO OUTPUT CHAR
00320
00330 ***** FORM FEED SECTION *****
00340
45B6 AF 00350 XOR A ;CLEAR " A "
45B7 D0B603 00360 OR (IX+03) ;CHECK LINE/PAGE REF = 0?
45BA 2832 00370 JR Z,STATUS
45BC D07E03 00380 LD A,(IX+03) ;GET LINES/PAGE REF.
45BF D09604 00390 SUB (IX+04) ;SUB. # LINES PRINTED
45C2 47 00400 LD B,A ;SET UP LOOP COUNTER
45C3 CDEE45 00410 AGN1 CALL STATUS ;IS PRINTER READY
45C6 20FB 00420 JR NZ,AGN1 ;IF NOT GO BACK & CK AGN
45C8 3E0A 00430 LD A,0AH ;SET OUTPUT CHAR = <LF>
45CA 32E837 00440 LD (37E8H),A ;OUTPUT CHAR TO PRINTER
45CD 10F4 00450 DJNZ AGN1 ;REPEAT TILL TOP OF FORM
45CF 181E 00460 JR RSTLC ;JP TO RESET LINE COUNTER
00470
00480 ***** OUTPUT CHARACTER ROUTINE *****
00490
45D1 F5 00500 OUTCHR PUSH AF ;SAVE CHAR
45D2 CDEE45 00510 AGN2 CALL STATUS
45D5 20FB 00520 JR NZ,AGN2
45D7 F1 00530 POP AF ;RESTORE OUTPUT CHAR
45D8 32E837 00540 LD (37E8H),A ;OUTPUT CHAR TO PRINTER
45DB FE0D 00550 CP 0DH ;IS IT <CR>?
45DD C0 00560 RET NZ ;RETURN IF NOT
00570
00580 ***** CHECK FOR END OF PAGE *****
00590
45DE D03404 00600 INC (IX+04) ;INC LINE COUNTER
45E1 D07E04 00610 LD A,(IX+04) ;GET COUNT VALUE
45E4 D0BE03 00620 CP (IX+03) ;IS COUNTER = REFERENCE?
45E7 79 00630 LD A,C ;RESTORE CHAR BEFORE RET
45E8 C0 00640 RET NZ ;RETURN IF L.C. <> REF.
45E9 D0360400 00650 RSTLC LD (IX+04),00 ;RESET LINE COUNTER
45ED C9 00660 RET
00670
00680 ***** STATUS *****
00690
45EE 3AE837 00700 STATUS LD A,(37E8H) ;GET PRINTER INTERFACE
00710 ; STATUS WORD
45F1 E6F0 00720 AND 0F0H ;MASK OUT L.S.B.
45F3 FE30 00730 CP 30H ;IS PRINTER READY?
45F5 C9 00740 RET
-----
AGN1 45C3 AGN2 45D2 OUTCHR 0000 OUTCHR 45D1 RSTLC
45E1
STATUS 45EE

```

Listing 2. Patch for EDTASM.

```

00100 *****
00110 ;* <LF> ON <CR> PATCH FOR EDTASM *

```

animation!



PCTWDO (PICTURE WINDOW)

Includes machine language subroutines which allow easy creation of animations, images larger than the screen, etc.

- Images can be saved on cassette for use in other programs.
- Easily accessed from BASIC or assembler.
- Full wrap-around protected.
- Can be used for alphanumeric.
- Includes EDTASM source, system/object code, BASIC Demo, and 5 demo animations on cassette.
- 16 page manual
- For LII 16K.

\$12.00ppd



WW I

FRANK LUKE

Is a simulation based on the exploits of American Ace Frank Luke, Jr. Hunt for observation balloons behind the front. If you survive, you get a trip to Paris (created by PCTWDO). For LII 16K.

\$10.00ppd

the
lightpen
keyboard
joystick
sensor
you name it



connection

THE UI000 8-bit TTL/CMOS input port is the best deal around for putting your computer in contact with the world around it without tying up the cassette port or modifying the computer. Plugs into expansion card edge at back of keyboard. Full documentation, instructions, plans for joysticks, ... Powered by inexpensive AC adapter available from Radio Shack and elsewhere. For LII. Kit \$35.00 Assembled & tested \$45.00ppd

Order PCTWDO, FRANK LUKE, & UI000 from: 292

UNIVERSAL INTERFACE

We accept
VISA & MC

P.O. BOX 1077
GLENDALE HEIGHTS,
IL 60137
(312) 469-6921

(IL residents add 5% % tax)

```

00120 ;*****
00130
00140 ; BY JOHN T. BLAIR WA4QHZ
00150
00160 ; THIS PATCH IS DESIGNED TO WORK WITH THE EDTASM
00170 ; PROGRAM AND A PRINTER / INTERFACE LOCATED AT 37E8H.
00180 ; THE MAIN PORTION OF THE PROGRAM IS THE PRINTER DRIVER
00190 ; IN EDTASM WHICH RESIDES FROM 45AAH - 45F5H. WHICH IS
00200 ; IDENTICAL TO THE ONE IN ROMS 058DH - 05D8H.
00210 ; THE PATCH INSERTS THE <LF> IF A <CR> WAS THE
00220 ; LAST CHARACTER OUTPUTTED. IT THEN CHECKS THE LINE
00230 ; COUNTER LOCATED AT 4314H AND COMPARES IT TO A
00240 ; ** CONSTANT ** (52D) REFERENCE TO DETERMINE IF A <FF> IS
00250 ; NEEDED. IF NOT IT THEN INCREMENTS THE LINE COUNTER AT
00260 ; 4314H.
00270 ; NOTE: THE "IX" REG. = 4310H. THEREFORE, (IX+03)
00280 ; CONTAINS THE TOTAL NUMBER OF LINES A PAGE WILL HOLD.
00290 ; THIS IS SET TO 66 DECIMAL. IF PAGE LENGTH IS LESS THAN
00300 ; 66 THIS CELL MUST BE CHANGED. THIS CONTROLS THE NUMBER
00310 ; OF <LF>'S OUTPUTTED FOR A <FF>.
00320 ; THE <LF> PATCH IS INSERTED IN THE EDTASM'S
00330 ; KEYBOARD DRIVER ROUTINE WHICH RESIDES FROM 43EFH-445FH.
00340 ; THE EDTASM'S KEYBOARD DRIVER IS REPLACED WITH A CALL
00350 ; TO THE LEVEL II ROMS.
00360 ; THE ENTIRE PRINTER DRIVER WAS NOT CALLED FROM
00370 ; ROMS BECAUSE IT COULD NOT BE EASILY MODIFIED FOR THE
00380 ; <LF> AFTER <CR>. NOR COULD YOU GET A <FF> AT THE END OF
00390 ; "X" NUMBER OF LINES.
00400
00410
00420 ;*****
00430 ;* " LINK " TO AUTO LINE FEED AND FORM FEED *
00440 ;*****
00450
00460 PATCH EQU 4400H ;STARTING ADDRESS OF THE
00470 ;<LF> PATCH.
00480
00490 ORG 45DDH ;REPLACE ALL AFTER THE
00500 ;"CP 00H" INSTRUCTION
00510 ;NEAR THE END OF EDTASM'S
00520 ;PRINTER DRIVER WITH 00H.
00530
00540 JP Z,PATCH ;JUMP TO THE PATCH IF THE
00550 ;<CR> WAS SENT.
00560
00570 RET
00580
00590 ;*****
00600 ;* KEYBOARD DRIVER PATCH *
00610 ;*****
00620
00630 KYBRD EQU 03E3H ;ROM KEYBOARD ROUTINE
00640
00650 ORG 43EFH ;START OF KEYBOARD DRIVER PATCH
00660 JP KYBRD ;CALL ROM KEYBOARD ROUTINE
00670
00680 NOP
00690
00700
00710 ;*****
00720 ;* LINE FEED PATCH *
00730 ;*****
00740
00750 STATUS EQU 45EEH ;PRINTER READY CHECK.
00760 GENFF EQU 45B6H ;FORM FEED FROM EDTASM
00770
00780 ORG 4400H ;START OF <LF> PATCH
00790
00800 AGN1 CALL STATUS ;IS PRINTER READY? THIS
00810 ;SECTION CALLED "STATUS"
00820 ;FROM THE EDTASM PRINTER
00830 ;DRIVER ROUTINE.
00840 JR NZ,AGN1 ;IF NO CHECK TILL READY
00850 LD A,0AH ;SET OUTPUT CHAR = <LF>
00860 LD <37E8H>,A ;OUTPUT CHAR TO PRINTER
00870 INC <IX+04> ;INC. THE LINE COUNTER
00880 LD A,<IX+04> ;GET VAL OF LINE COUNTER
00890 CP 50D ;THIS IS THE * CONSTANT *
00900 ;WHICH SET THE NUMBER OF
00910 ;LINES PER PAGE.
00920 LD A,C ;RESTORE PRINT CHAR FOR
00930 RET NZ ;EXIT
00940
00950
00960
00970 ;*****
00980 ;* FORM FEED *
00990 ;*****
01000
01010 ; THERE ARE TWO FORM FEED OPTIONS PRESENTED HERE.
01020 ; 1) THE ROUTINE AT LINE 1070 IS FOR A PRINTER LIKE THE
01030 ; DATEL 1030 WHICH "DOES NOT" RECOGNIZE A <FF>.
01040 ; 2) THE ROUTINE AT LINE 1120 IS FOR A PRINTER LIKE THE
01050 ; HEATH H-14 WHICH "DOES" RECOGNIZE A <FF> 0CH.
01060
01070 ; ***** MANUAL FORM FEED *****
01080

```

section. After every character is printed OUTCHR is checked to see if a <CR> was sent. If not it returns to the calling program. If the last character is a <CR> then the line counter is incremented. This is where a Jump (JP) to the patch will be inserted (the "LINK" section in Listing 2). Next a block of unused memory is needed in which to store the line and form feed patch.

Unfortunately, there is no spare memory in the EDTASM. Consequently, the space must be generated. Since the keyboard routine (43EF-445FH) is also located down in ROM, the EDTASM's can be zeroed. Because the EDTASM calls the keyboard driver, a Jump to the keyboard is used. (See Listing 2, Keyboard Driver Patch.) All that remains is to insert the line and form feed patch. (Refer to Listing 2, Line Feed Patch.)

There are two form feed routines provided. The first is manual, and outputs line feeds using the top of form coding in the EDTASM printer driver. This is for printers that do not recognize a form feed (0CH). The second is an automatic routine for printers that recognize a <FF>, and simply outputs a 0CH to the printer.

Number of Lines to a Page

To change the number of lines to a page using the manual form feed above, the contents of 4313H must be changed. It is preset to 66 in the EDTASM program. Using the monitor examine the contents of 4313H and change it to the desired value.

The auto form feed outputs a 0CH command to the printer. Therefore, consult the printer manual for instruction on how to change the length of a page.

TRS-232 Interface

For the readers still thinking about a printer and interface, let me say a word about the TRS-232 Interface by Small System Software. It is designed to be plugged into the audio output cable from the TRS-80, and drive a slow, RS-232, serial input printer, like a model 33 teletype. It sells for about \$50 ready to run with cassette for the software.

Because of its simplicity,

"THE ORIGINAL"

Personal Computing[®] 80

Presents:
**Personal Computing
 and Small Business
 Computer Show**

The Largest Personal Computing Show in 1980



August 21, 22, 23, 24th at the Philadelphia Civic Center

- Major exhibits by the industries leading companies
- Thursday, Aug. 21st, Dealer Day — 12 Noon to 6 P.M.
- Friday and Saturday, Aug. 22, 23rd — 9 A.M. to 6 P.M.
- Sunday, Aug. 24th — 10 A.M. to 5 P.M.
- Free Seminars • Robotics Contest • Antique Computer Display
- Special Seminars and Tutorials about Computer Music, Saturday, Aug. 23rd
- 3rd Annual Computer Music Festival, Saturday Evening, Aug. 23rd
(Computer Music Festival is sponsored by the Philadelphia Area Computer Society-Tickets on sale at show)
- Computer Visual Arts Festival, Sunday, Aug. 24th

Advanced Registration Saves Time & Money

☐ Send _____ Dealer-Retailer (4 days)
 Registrations at \$10. each, \$12. at door
 for Thursday-Sunday, Aug. 21, 22, 23,
 24

☐ Send _____ Regular Registrations (3
 days) at \$8. each, \$10. at door for
 Friday-Sunday, Aug. 22, 23, 24 only.

Advanced Registrations will be mailed late
 July - early August. No Advanced Registra-
 tions accepted after Aug. 8th.

☐ Send Exhibitor information or Phone
 609-653-1188

COMPANY NAME _____

NAME _____

STREET _____

CITY _____ STATE _____ ZIP _____

PHONE _____

Send To:

PERSONAL COMPUTING 80 ✓ 393

Rt. 1, Box 242, Warf Rd.. • Mays Landing, NJ 08330

there is no handshake between the printer and the TRS-80. This means that if the baud rate gets too high, the printer misses data during the head-retract. (NOTE: This article was written, and so were the listings, using Electric Pencil, EDTASM and the TRS-232 interface at 600 baud.)

The interface is housed in a small box with a power cord to a transformer which plugs into an AC outlet and a DB-25 connector to attach to your printer. The interface consists of an OP-AMP used as a level shifter from Transistor Transistor Logic (TTL), 0 to 5 Volts DC, to RS-232, + 12 to - 12 Volts DC. The parallel to serial conversion is performed with a software driver, which honors the LLIST and LPRINT commands in BASIC, and resides in high core memory. However, the EDTASM does not honor Protected Memory, and consequently the TRS-232 software must be jammed into some area of the EDTASM program.

As before, the EDTASM's keyboard routine is deleted to

```

4414 CDB645 01090 CALL GENFF ;CALL <FF> FROM EDTASM
4417 C9 01100 RET
01110
01120 ; ***** AUTO FORM FEED *****
4418 CDEE45 01130 AGN2 CALL STATUS ;IS PRINTER READY?
441B 20FB 01140 JR NZ,AGN2 ;NO OK TILL READY
441D 3E0C 01150 LD A,BCH ;SET OUTPUT CHAR = <FF>
441F 32E837 01160 LD (37E8),A ;OUTPUT CHAR TO PRINTER
4422 79 01170 LD A,C ;RESTORE PRINTER CHAR
4423 C9 01180 RET
01190
0000 01200 END
00000 TOTAL ERRORS

```

```

AGN1 4400 AGN2 4418 GENFF 45B6 KYBRD 03E3 PATC% 0000
PATC% 4400 PATCH 4400 STATUS 45EE

```

Listing 3. TRS-232 Printer Driver Incorporated into EDTASM.

```

00100 ;*****
00110 ;* MODIFICATION TO EDTASM INCORPORATING THE TRS-232 *
00120 ;* PRINTER DRIVER ROUTINE *
00130 ;*****
00140
00150 ; MODIFICATION BY JOHN T. BLAIR WA4CHZ
00160
00170 ; THIS PATCH IS DESIGNED TO INCORPORATE THE TRS-232
00180 ; PRINTER DRIVER ROUTINE INTO THE EDTASM. THE KEYBOARD
00190 ; ROUTINE IS REPLACED BY USING THE ONE IN ROM. THE TRS-232
00200 ; DRIVER IS THEN STORED IN THE REMAINING KEYBOARD ROUTINE
00210
00220
00230 ;*****
00240 ;* KEYBOARD DRIVER PATCH *
00250 ;*****
00260
00270

```

THE BOOKKEEPERS

FOR INFO CALL (603)-447-2745

Full Charge Bookkeeper—48K, 3 DRIVE, w/ALPHA\$129.95

Intermediate Bookkeeper—48K, 2DRIVE & Printer \$109.95

Cheap Bookkeeper—32K, 2DRIVE & Printer \$89.95

All Above Are Daily Journal—G/L Systems

Hex Code Converter, Loan Payment Finder, &
Amortization Table, 16K, 1DRIVE & Printer—ALL 3 \$29.95

STURDIVANT & DUNN, INC. ✓82

BOX 277, 124 WASHINGTON ST., CONWAY, NH, 03818

SURPLUS TRS-80* EXPANSION INTERFACES WITH 32K RAM

Due to changes in Product Structure
American Business Computers is offering
14 Expansion Interfaces (All w/32K RAM)
at closeout prices.

\$450

American Business Computers guarantees
expansion Interfaces to be Brand New—
still in original boxes with original docu-
mentation and in perfect working condition.

AMERICAN BUSINESS COMPUTERS

✓397

*TM TANDY CORP.

118 S. MILL ST. - PRYOR, OK 74361 - 918-825-4844

9.95 SOFTWARE

P.O. BOX 521 Lowell, MA 01853


- 1 • Memory based printer spooler, overlap processing and I/O.
- 2 • IBM based terminal driver, EBCD and correspondence code. Full ASCII character set with overstrikes. Scripts ZAPS.
- 3 • Disk timing program. Meter Type numerical and statistical screen displays. Very easy calibration of all type drives.
- 4 • Cassette test programs. Writes test data to tape, then displays all errors on screen. Use to check all facets of cassette operation and duplication quality.

SEND FOR FREE FLYER

— The bottom line —

COST: \$9.95 Each + .75 postage
MA Orders + 5% tax ✓235

PRIAM Hard Disks Now Available from SIRIUS SYSTEMS!



PRIAM's high-performance, low-cost Winchester disk drives speed up throughput and expand data storage from 20 megabytes to 154 megabytes. And a single controller can be used to operate 14-inch disk drives with capacities of 33, 66, or 154 megabytes or floppy-disc-size drives holding 20 and 34 megabytes. So it's easy to move up in capacity, or reduce package size, without changing important system elements or performance.

- Fast, Linear Voice Coil Positioning
- 10 ms track-to-track positioning
- Fully servoed head positioning
- Dedicated servo tracks
- DC Power required only!
- Simple, parallel Interface
- Optional SMD Interface
- 50 ms Average Positioning time
- 90 ms Maximum Positioning Time
- 6.4 ms Average Latency

THE PRIAM LINEUP

Model/Disk Size	Capacity	Size	Weight	Price
DISK05 3350 (14")	33Mbytes	7" x 17" x 20"	33 lbs.	\$2995
DISK05 6650 (14")	66Mbytes	7" x 17" x 20"	33 lbs.	\$3749
DISK05 15450 (14")	154Mbytes	7" x 17" x 20"	33 lbs.	\$4695
DISK05 2050 (8")	20Mbytes	4.62" x 8.55" x 14.25"	20 lbs.	\$2995
DISK05 3450 (8")	34Mbytes	4.62" x 8.55" x 14.25"	20 lbs.	\$3745
DISK05 570	5.3 Mbytes	floppy-size	(low)	(low)
DISK05 1070	10.6 Mbytes	floppy-size	(low)	(low)


All PRIAM DISK05 Drives have a Transfer Rate of 1.03 Mbytes/Sec.
Optional SMD interface available for \$150.

SIRIUS SYSTEMS offer cases and enclosures for all PRIAM Hard Disk Drives. All 14" Winchester Drives will mount in our 14" Standard Case. The 8" Winchester have two alternatives: a single drive case and a dual drive case. All SIRIUS SYSTEMS Winchester drive cases include Power Supply, internal cabling, switches, fan, extra AC outlet (not switched, but fused) and possess very adequate ventilation. Drive addressing is done on the rear of the Case and not on the drive itself to provide ease of use during operation. All WINCHESTER DRIVE Cases are Warranted for a full year and come in our standard blue-black color scheme. Consult us for current availability and pricing.

Remex RFD 4000/4001 8" Floppy Disc Drives Double sided ... Double density!!

\$549⁹⁵

RFD 4001, \$569.95




Offers quality and features found in drives costing much more! ■ Single or Double Density ■ Double-Sided Drive ■ Door Lock INCLUDED ■ Write-Protect INCLUDED ■ 180 Day Warranty ■ Compatible with Shugart 850/851 ■ Low Power Operation ensures LONGER LIFE!! ■ Model RFD 4001 offers Data and Sector Separator

RFD 4000/4001 Technical Manual	6.95	RFD 4000C/B Cabinet (for use with Power Modules)	29.95
Connector Set #3 (AC, DC, Card Edge)	10.95		
Connector Set #4 (AC and DC)	2.95		

Remex 1000B ... If you've been looking for a less expensive floppy disc drive, but not wanting to sacrifice quality— this is it!

\$419⁹⁵



You get both in the Remex 1000B! For only \$419.95 look at what you get: ■ 8" Floppy Drive ■ Single or Double Density ■ Hard or Soft Sectoring ■ Media Protection Feature ■ Single Density Data Separator ■ 180 Day Factory Warranty

Door Lock Option	\$19.95	Write Protect Option	\$19.95	RFD 1000B Technical Manual	\$5.95
Interface Adapter		Connector Set #1		RFD 1000B CASE (for use with Power Modules)	\$29.95
(REMEX-to-Shugart)	\$14.95	(AC, DC, & Card Edge)	\$10.95		


SIRIUS 8" DISK POWER MODULES

The Single and Dual Drive Power Modules are designed to provide DC and (switched) AC power for one (the Single Drive Power Module) or two (the Dual Drive Power Module) the DDPM will power three RFD 4000s or 4001s 8" Floppy Disk Drives. Many features are included for safe and reliable operation and the Power Modules come with our standard

180 day WARRANTY (the Open Frame Power Supply warranty is for 2 years). All Power Modules will work with either the RFD 4000C/B or RFD 1000B case (color schemes match also).

Dual Drive Power Module (DDPM)	\$139.95
Single Drive Power Module (SDPM)	\$119.95

SIRIUS 80+ Perfect Add-Ons for Your Computer System!



The SIRIUS SYSTEMS 80+ Series of Floppy Disk add-ons are designed to provide unmatched versatility and performance for your computer. Consisting of four different add-ons, there is a 80+ Series Floppy Disk to meet your need. All 80+ Series Floppy Disk are compatible with the TRS-80* and come ready to plug in!

COMMON CHARACTERISTICS

- 5 ms track-to-track access time
- Auto-eject
- 180 day WARRANTY
- Exceptional speed stability — 1 1/2%
- Single density (FM) or double density (MFM/MFM)
- Ultra high reliability
- 2 year Power Supply Warranty
- Mix any or all 80+ Series on the same cable!
- Includes user accessible plugboard for drive reconfiguring

SPECIFIC CHARACTERISTICS

The SIRIUS 80+1 is a single sided, 40 track, highly reliable Floppy Disk add-on. Offering 5 more tracks than the Radio Shack model, it cost \$140 less! Formatted data storage is 102K/20K bytes single/double density.

SIRIUS 80+1 \$359.95

The SIRIUS 80+2 is a dual sided, 70 track (35 per side), highly versatile Floppy Disk unit. It appears to be the TRS-80* as TWO 35 track drives, yet COST LESS THAN HALF THE PRICE! Even greater savings result, since data is recorded on both sides of the media instead of only a single side. Using the plug board, it may be reconfigured for other computer systems! (The 80+2 operates as Drive 0 and any of the other three addresses (with the standard Radio Shack Cable) or as any of four drives (with the SS Standard Cable).) Formatted data storage is 80.6K/161.2K bytes single/double density.

SIRIUS 80+2 \$449.95

The SIRIUS 80+3 is a single sided, 60 track, "Quad" density Floppy Disk unit. Offering 2 1/2 times the storage of a Standard Radio Shack drive, the 80+3 greatly reduces the need for diskettes correspondingly. Additionally, because of the increased storage and faster track-to-track access time, the 80+3 allows tremendously increased throughput for disk based programs!!! The 80+3 INCLUDES SIRIUS's TRAKS-PATCH on Diskette. Formatted data storage is 204K/40K8 bytes single/double density.

SIRIUS 80+3 \$489.95

The SIRIUS 80+4 Floppy Disk add-on is a double sided, 160 track (80 per side), 5 1/4" monster! The ultimate in state-of-the-art 5 1/4" Floppy Disk technology, to 80+4 is seen by the TRS-80* as two single sided disk drives, each with 80 tracks. Thus, in terms of capacity one 80+4 is equivalent to 4 1/2 standard Radio Shack drives — a savings of over 73% (not to mention diskettes!!!). (With a double density converter, the available memory is huge!) The 80+4 is similar to the 80+2 in that it arrives configured as Drive 0 and any of the other three addresses (with the standard Radio Shack Cable) or as any of four drives (with the SS Standard Cable). The 80+4 INCLUDES TRAKS-PATCH on Diskette. (The plug board is also included.) Formatted data storage is 408K single density or 816K bytes double density.

SIRIUS 80+4 \$624.95

All 80+ Series Floppy Disk add-ons operate a 5 milliseconds track-to-track access time (eight times faster than the SA 400) but are Expansion Interface Limited to 12 milli-seconds for the TRS-80*.


*TRS-80© Tandy Corp.

MPI 51/52 ... A Great Reliable Mini-Drive!

- Fast! 5ms track to track access
- Exclusive Pulley-Band Design
- Unique Door/Ejector Mechanism
- Reliable 1 1/2% Speed Stability
- Single/Double Density Operation
- Industry/ANSI Standard Interface

MPI 51
(Single Head, 40 tracks, 120K/240K bytes Single/Double Density**) \$259.95

MPI 52
(Dual Head, 70 tracks, (35/side), 218.8K/437.5K Single/Double Density**) \$349.95



MPI 91/92 ... NEW STATE-OF-THE-ART DISK DRIVE!

MPI 91
(Single Head, 80 tracks, 240K/480K Single/Double Density**) \$389.95

MPI 92
(Single Head, 160 tracks (80/side), 480K/960K Single/Double Density**) \$499.95

**Unformatted data storage

Introducing the Versatile, Low-Cost OMEGA Series Controller

As new technological advances bring down the cost of fast, reliable mass data storage, the need for an inexpensive, versatile controller have become greater and greater. To meet this need, SIRIUS SYSTEMS' OMEGA Series Controller was designed.

The SIRIUS OMEGA Series Controller Module utilizes an on-board microprocessor to mediate data transfer to a wide variety of peripherals from an equally wide variety of host computer systems. Up to four Winchester Hard Disks (8" or 14"), four 5 1/4" Floppy Disk Drives and/or up to eight 8" Floppy Disk Drives may be in use at one time. Host systems interfacing is accomplished via a parallel or a serial interface. With the addition of a Personality module, the OMEGA Series Controller Module is directly compatible with many popular computer systems (among them the TRS-80*, Apple, Heath, and others). Provision is made for the addition of a streaming tape drive, also.

SPECIFIC HARDWARE

- Control of up to twelve Floppy Disk Drives (eight 8" and/or four 5 1/4")
 - 8" and/or 5 1/4" Disk Drive Utilization
 - Single (FM) or Double (MFM) density data storage
 - Hard or Soft sector diskette usage
 - Utilization of "Quad" density (96 tpi) 8" or 5 1/4" Disk Drives
- Control of up to four WINCHESTER type PRIAM DISK05 Disk Drives
 - 8" or 14" may intermix on the same cable
 - Accommodates 8" and/or 14" drives of 5.3Mbytes to 154Mbytes
 - Ultra-Fast data transfers
- Extremely flexible host-controller interfacing

SPECIFIC SOFTWARE

- FEATURES INCLUDE:
 - Dynamic format modifications via command words
 - Extremely flexible format acceptance for unusual data storage formats
 - Easily interfaces to standard operating systems (TRS-DDS*, CP/M***, etc)
 - Operates in either get/put sector mode or data string mode
 - Performance parameters may be changed by EPROM replacement or Dynamic Reprogramming

Dedicated systems cards are also available on a limited basis for the STU-BDS and the S 100. These cards feature shared memory also (again, software selectable) in addition to the regular OMEGA Series Controller Module features. Consult SIRIUS SYSTEMS for current price and availability for the entire line of OMEGA Series Memory Units and Controllers. Dealer inquiries are invited.

SIRIUS SYSTEMS

7528 Oak Ridge Highway
Knoxville, Tennessee 37921 ✓ 67

TO ORDER CALL (615) 693-6583

Phone Orders Accepted 9AM-7PM (ESDT)

We accept MC, VISA, AE, COD (requires Certified Check, Cashier's Check or Cash) and Checks (personal checks require 14 days to clear). SHIPPING AND HANDLING: \$7.00 per Floppy Disk Drive or 80+ Module ■ 5% for other items (any excess will be refunded) ■ Foreign Orders add 10% for Shipping & Handling. Payment in U.S. currency ■ Tennessee residents add 6% Sales Tax ■ VOLUME DISCOUNTS AVAILABLE

```

03E3      00280 KVRD   EQU      03E3H      ;ROM KEYBOARD ROUTINE
00290
43EF      00300      ORG      43EFH      ;START OF KEYBOARD DRIVER PATCH
00310
43EF C3E303 00320      JP      KVRD      ;TRANSFER TO ROM KEYBOARD ROUTINE
00330
00340
00350 ;*****
00360 ;*              TRS-232 PRINTER DRIVER              *
00370 ;*****
00380
00390
00400 ;          THE TRS-232 PRINTER DRIVER SHOULD BE PLACED HERE.
00410 ; DO NOT FORGET THAT THIS PROGRAM PROVIDES SELECTABLE:
00420 ;          1) LINE FEED ON CARRIAGE RET
00430 ;          2) HEAD RETRACT DELAY
00440 ;          3) LINE SPACING
00450 ;          4) BAUD RATE
00455
00460 ;BE SURE THAT YOU CONSULT THE TRS-232 MANUAL AND
00470 ; INCORPORATE THE PROVISIONS YOU DESIRE.
00480
00490 ;*****
00500 ;*              " LINK " TO NEW PRINTER DRIVER      *
00510 ;*****
00520
00530
43F5      00540 PATCH  EQU      43F5H      ;STARTING ADDRESS OF TRS-232
00550
00560
45AA      00570      ORG      45AAH      ;STARTING ADDRESS OF " LINK "
00580
45AA C3F543 00590      JP      PATCH    ;TRANSFER TO TRS-232
00600
00610
00620      END
0000
00000 TOTAL ERRORS
CYBRD 0000      CYBRD 03E3      CYBRD 03E3      PATCH 43F5

```

Listing 4. Form Feed for TRS-232.

```

00100 ;*****
00110 ;*              FORM FEED FOR EDTASM / TRS-232      *
00120 ;*****
00130
00140 ;BY JOHN T. BLAIR WA4OHZ
00150
00160
00170 ;          THIS PROGRAM IS DESIGNED TO GIVE THE TRS-232
00180 ; PRINTER DRIVER THE CAPABILITY OF GIVING A FORM FEED
00190 ; AFTER A PRESET NUMBER OF LINES.
00200
00210
00220 ;*****
00230 ;*              " LINK " TO FORM FEED              *
00240 ;*****
00250
00260 ;          THIS SECTION IS USED TO " LINK " TO THE FORM
00270 ; FEED PATCH.
00280
00290
4454      00300      ORG      4454H      ;REPLACES THE " CP <CR> "
00310 ;AT LINE 1750.
4454 C30045 00320      JP      FRMFED    ;GOTO FORM FEED
4457 00      00330      NOP
00340
00350
00360 ;*****
00370 ;*              FRMFED                              *
00380 ;*****
00390
00400
00410 ;          THIS SECTION GENERATES A FORM FEED AFTER A <CR>
00420 ; IF THE CORRECT NUMBER OF LINES HAVE BEEN PRINTED. THE
00430 ; NUMBER OF LINES PRINTED CAN BE CHANGED IN LINE 600
00440 ; AND THE NUMBER OF LINES BETWEEN PAGES CAN BE CHANGE IN
00450 ; LINE 670.
00460
00470
441E      00470 NULLS  EQU      441EH      ;LINE 1430 IN TRS-232
43FE      00480 COUNT  EQU      43FEH      ;LINE 1220 IN TRS-232
445B      00490 EXIT   EQU      445BH      ;LINE 1790 IN TRS-232
00500
00510
45B0      00510      ORG      45B0H
00520
00530
45B0 FE00 00530 FRMFED  CP      00H      ;THESE ARE THE TWO LINES
45B2 C25844 00540      JP      NZ,445BH    ;REPLACED BY THE JP IN
00550 ;TRS-232 BY THE " LINK "
00560 ; RETURN TO TRS-232 AT LINE 1770
00570
45B5 3A2940 00580      LD      A,<4029H>      ;GET LINE COUNTER

```

give you the needed memory area for the TRS-232 printer driver. A Jump to 03E3H is inserted at 43EF as the first instruction of the EDTASM keyboard routine (Listing 3). This transfers the program flow down to the ROMs for the keyboard driver.

Now comes the hard work. Enter the object code for the TRS-232 printer driver routine starting at 43F5H. Don't forget to insert the proper hex code for your desired baud rate from the hex table on page 5 of the TRS-232 manual. You should have three bytes of 00H at 43F2-43F5H and one byte at 445FH that are still NOPs (00H). Boy, that was close.

All that is left to do is link the new driver routine to the printer routine in the EDTASM program.

To link the new printer driver to the old one in the EDTASM, zero the old printer driver. It resides from 45AA-45F5H. Examine 45AB-45ADH and replace the 00Hs with a jump to 43F5: C3 F5 43.

Now that wasn't so bad, he said, as the sweat rolls off his forehead. All that is left to do is save a copy of this modified version of EDTASM, using the PUNCH command of your monitor.

The only shortcoming of this modification is that it cannot generate a form feed.

Form Feed for EDTASM/TRS-232

A program that gives you a form feed can be located where the EDTASM's original printer driver was located. Refer to Listing 4 for the source of this modification.

Again, as in all modifications, you must link from the main program to the patch. This is accomplished by the LINK section, by replacing the CP CR and the JRZ, NULLS instructions with a jump to the form feed patch.

The first two instructions in the form feed routine must be the two instructions we replace by the LINK. If the last character printed is not a <CR>, the program flow is transferred back to the TRS-232 program. If the last character is a <CR>, the line counter (established at 4029H,

the L.C. for the ROM printer driver) is incremented and checked against a constant.

This constant controls the number of printed lines on the page. In the source listing it is set to 54 lines per page. If the end of page is not reached, program control returns to the TRS-232. When the end of a page is reached, line XXXX controls the number of line feeds sent to space between pages.

After the top of form has been executed the line counter is reset. This completes the printer modifications to the EDTASM.

EDTASM and Protected Memory

The ENTRY point (cold start) to EDTASM is 468AH, and the execution of this coding checks the memory, sets up the stack and some of the pointers (See Listing 5).

The text buffer, where text can start, is the first item taken off. It is 5CF9H and this value is stored in cell 4115H. The memory test resides at 4693-469FH, and the end of memory

```

45B8 3C      00590      INC      A
45B9 FE22    00600      CP       34D
45BA 2806    00610      JR       Z,GENFF
45BB 322940  00620      LD       <4029H>,A
45BC C31E44  00630      JP        NULLS
                     00640
                     00650 ;***** GENFF *****
                     00660
45C3 060E    00670 GENFF LD      B,14D      ;SET # OF <LF> BETWEEN
                     00680                ;PAGES
45C5 C5      00690 AGN   PUSH   BC      ;SAVE LOOP COUNTER
45C6 3E0A    00700      LD      A,0AH    ;SET OUTPUT CHAR = <LF>
45C8 CDFE43  00710      CALL   COUNT   ;TRS-232 OUTPUTS CHAR
45CB 3E00    00720      LD      A,00H    ;SET OUTPUT CHAR = 00
                     00730                ;AS A DELAY FOR MECHANICS
45CD CDFE43  00740      CALL   COUNT   ;OUTPUT CHAR
45D0 C1      00750      POP     BC      ;RESTORE LOOP COUNTER
45D1 10F2    00760      DJNZ   AGN     ;REPEAT FOR # OF <LF>
45D3 3E00    00770      LD      A,00H    ;RESET THE LINE COUNTER
45D5 322940  00780      LD      <4029H>,A ;TO ZERO
45D8 C35B44  00790      JP        EXIT
                     00800
                     00810      END
00000 TOTAL ERRORS
AGN      45C5      COUNT  43FE      EXIT   445B      FRMFED  45B0      FUDDS   4416
FUDLS    441E      GEFFF   45C3


```

```

00100 ;*****
00110 ;*          EDTASM  INITIALIZATION          *
00120 ;*****
00130
00140 ; DOCUMENTED BY JOHN T. BLAIR WA4QHZ
00150
00160
468A      00170      ORG      468AH ;COLD START, INITIALIZATION
00180
468A 21F95C  00190      LD      HL,5CF9H ;START OF TEXT ADDRESS
468D 221541  00200      LD      <4115H>,HL ; START OF TEXT POINTER

```

GOO-GOO, GAA-GAA, REA-DEE...

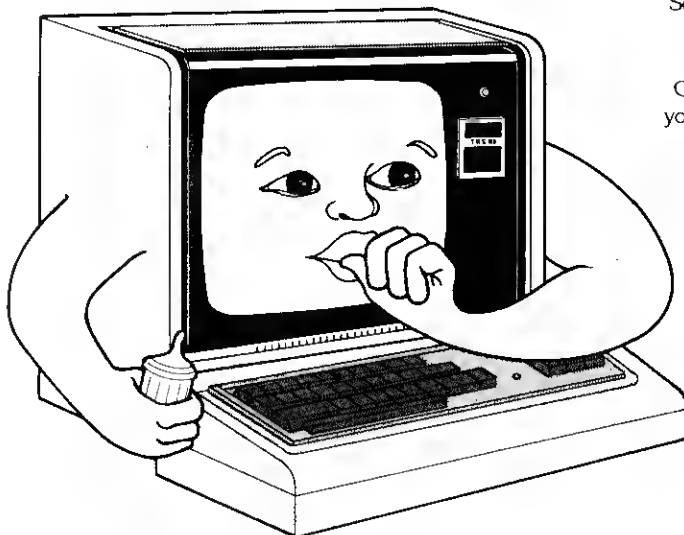

The Fine Print:

Overseas rates a tad higher—please write for them.

Back issues available—ask for our list.

TRS-80 is a trademark of Tandy Corporation.

Californy residents add 6% to single copies and anthologies.

Programs are for Lvl I 4K and Lvl II 16K. After Oct 1, Lvl II 16K only.

So your new **TRS-80** just said its first word. REA — DEE. Now what? Are you thinking of its future? About its education?

Before you run out and get an ANSI standard FORTRAN or a CODASYL data base management system, think back to when you were less than a year old. How would you have handled the bewondering plethora of data you are possibly thinking of handing to your computer? No, you have to **CLOAD** before you can RUN — we all know that. So put away all those COBOL routines and Pascal texts, and get a subscription to **CLOAD MAGAZINE**

CLOAD has just the right mix of nutritious programs for a healthy, happy new computer. Once a month, a new cassette will arrive at your door by First Class Mail, full of software that will provide a solid learning foundation for both you and your computer.

PRICES

	Now	Oct 1
1 year subscription	\$36.00	\$42.00
6 month subscription	\$20.00	\$23.00
Single copies	\$ 3.50	\$ 4.50
Anthology-volume 1	\$10.00	\$10.00
Anthology-volume 2	\$15.00	\$15.00

✓32 **CLOAD**
MAGAZINE, inc.
P. O. Box 1267 • Goleta, CA 93017
(805) 964-2761


```

4690 36FF      00210      LD      (HL),0FFH      ;FILL ALL BITS WITH 1'S
4692 23        00220      INC      HL              ;BUMP MEMORY POINTER
4693 36FF      00230      LD      (HL),0FFH
               00234      ;
               00236      ; ***** MEMORY TEST *****
               00238
4695 23        00240      AGN1      INC      HL              ;BUMP MEM POINTER
4696 7E        00250      LD      A,(HL)          ;GET CHAR FROM MEM
4697 47        00260      LD      B,A              ;* " B " = TEMP
               00261      ;STORAGE OF CHAR
4698 2F        00270      CPL              ;A = A* CHANGE ALL 1'S
               00280      ;TO 0'S & ALL 0'S TO 1'S
4699 77        00290      LD      (HL),A          ;STORE " A " IN MEM
469A BE        00300      CP      (HL)            ;A = A*? ALL BITS CHANGE
               00302      ;INDICATING GOOD MEM CELL
               00304      ;IF NO MEM CELL PRESENT
               00306      ;CHAR = FFH.
469B 70        00310      LD      (HL),B          ;RESTORE ORG. CONTENTS
               00320      ;OF THAT MEM CELL
469C 2BF7      00330      JR      Z,AGN1          ;GOOD CELL CONTINUE OK
469E 2B        00340      DEC      HL              ;BACK UP POINTER TO LAST
               00350      ;GOOD MEM CELL.
469F 221110    00360      LD      (4113),HL        ;SET END OF MEM POINTER
               00370
               00380
46A2 210A00    00390      LD      HL,000AH        ;NOT SURE WHAT IS GOING
               00392      ;ON HERE.
46A5 221510    00400      LD      (4117),HL
46A8 210041    00410      LD      HL,4100H
46AB 3601      00420      LD      (HL),01H
46AD 23        00430      INC      HL
46AE 3600      00440      LD      (HL),0DH
46B0 31FE42    00450      LD      SP,42FEH        ;SET STACK POINTER
46B3 AF        00460      XOR      A              ;CLEAR " A"
46B4 32BA41    00470      LD      (41BA),A
46B7 32BC41    00480      LD      (41BC),A
46BA 32E437    00490      LD      (37E4H),A
46BD 322040    00500      LD      (4020H),A
               00510      ;CASSETTE CONTROL STORAGE
46C0 D3FF      00520      OUT      (0FFH),A        ;SET 64 CHAR./LINE VIDEO
46C2 3E1C      00530      LD      A,1CH          ;HOME CURSOR
46C4 C03947    00540      CALL     4739H
46C7 3E1F      00550      LD      A,1FH          ;CLEAR SCREE
46C9 C03947    00560      CALL     4739H
46CC 3E0E      00570      LD      A,0EH          ;TURN ON CURSOR
46CE C03947    00580      CALL     4739H
46D1 21C948    00590      LD      HL,48C9H        ;POINT TO START OF SIGN
               00600      ;ON MESSAGE.
46D4 C02F47    00610      CALL     472FH        ;OUTPUT MESSAGE
46D7 C03747    00620      CALL     4737H
46DA 31FE42    00630      LD      SP,42FEH
               00640      ;***** WARM START *****
               00650      ;END OF INITIALIZATION
               00660      ;ROUTINE.
0000          00650      END
00000 TOTAL ERRORS
AGN1 4595

```

Listing 5. EDTASM's Initialization.

pointer is cell 4113H. As you can see, the EDTASM uses the reserved section of RAM, but unfortunately the pointers for BASIC are 40B1/40B2H and 40D6/40D7H.

To get the EDTASM to honor protected memory, you must delete its memory test, 4693-469FH. (Normally, this is not a very good idea, but when the TRS-80 is powered up the ROMs do a memory test.) Then insert the patch in Listing 6. All this routine does is copy the contents of 40B1 and 40B2H into 4113 and 4114H.

Reentering BASIC

When the B key is entered in the EDTASM, the program jumps to the address contained at cells 4930 and 4931H. Since, the warm start, reentry point, for BASIC is 1A19H, all that is required is to change the contents of 4930 to 19 and the contents of 4931 to 1AH. (Remember that the Z-80 CPU always reads the first byte of an address as the Least Significant Byte.)

If you are using a monitor and wish to work on the EDTASM, then Jump back to your monitor, instead of reentering BASIC at 4930 and 4931H, insert the starting point of the monitor.

Reentering EDTASM

Have you ever accidentally jumped out of the EDTASM, or gotten a power glitch and returned to "MEMORY SIZE"? This is frustrating especially after working for an hour or more on a program. Wouldn't it be nice if you could reenter EDTASM and still have your text?

EDTASM's warm restart is located at 46DAH. At this point the only pointer that is reset is the STACK, therefore, all of the text pointers are intact. To reenter EDTASM from BASIC, enter SYSTEM <ENTER>, then after it prompts " *? " enter /18141<ENTER>.

From monitor, use its GO (G) or Jump (J) instruction and jump to 46DAH. If you did not enter the program in Listing 6, you can replace EDTASM's memory check with the program in Listing 7. This program will load the SYSTEM entry pointer (40DF and 40E0H) with the warm re-

```

00100 ;*****
00110 ;*          EDTASM PROTECTED MEMORY          *
00120 ;*****
00130
00140 ;      BY JOHN T. BLAIR WA4QHZ
00150
00160 ;      THIS PROGRAM WILL ALLOW EDTASM TO HONOR PROTECTED
00170 ;      MEMORY. THE MEMORY SIZE IS SET ON POWER UP IN BASIC.
00175
00180 ;      THIS PROGRAM REPLACES THE EDTASM'S MEMORY CHECK.
00190
4693      00200      ORG      4693H
               00210
4693 210140    00220      LD      HL,40B1H          ;POINT TO BASIC'S
               00230      ;PROTECTED MEMORY POINTER
4696 111341    00240      LD      DE,4113H          ;EDTASM'S END OF MEMORY
               00250      ;POINTER
4699 7E        00260      LD      A,(HL)          ;GET LEAST SIGNIFICANT
               00270      ;BYTE OF THE ADDRESS
469A 12        00280      LD      (DE),A          ;STORE IT
469B 2C        00290      INC      L              ;POINT TO NEXT BYTE
469C 1C        00300      INC      E              ;BUMP EDTASM'S POINTER
469D 7E        00310      LD      A,(HL)          ;GET NEXT BYTE OF ADDRESS
469E 12        00320      LD      (DE),A          ;STORE IT
               00330
0000          00340      END
00000 TOTAL ERRORS

```

Listing 6. EDTASM and Protected Memory.

	EDTASM	BASIC	Description
1.	4318H	01D9H	Baud rate generator
2.	4338H	01F8H	Turn off cassette
3.	433DH	0215H	
4.	4346H	021EH	
5.	4354H	022CH	Flash asterisk
6.	435DH	0235H	Input 1 byte
7.	4369H	0241H	
8.	4389H	0264H	Output 1 byte
9.	43A9H	0284H	Turn on cassette
10.	43B8H	0293H	Find leader & sync byte

start vector. Now any time you exit EDTASM to BASIC, enter SYSTEM, and after the prompt " ? " enter / <ENTER>.

EDTASM's Device Control Block

- 1) 4300-4307H Keyboard
- 2) 4308-430FH Video
- 3) 4310-4317H Printer

The various driver routines are located at:

- 1) 43EF-445FH Keyboard
- 2) 4460-45A9H Video
- 3) 45AA-45F5H Printer

To replace all of the drivers, change the contents of 4615H to C2 and 4616H to 03. All of the coding between 43CEH and 45F6H can now be replaced by NOPs, leaving about 512 bytes for other modifications.

To gain another 400 bytes the cassette routines can also be deleted by calling the ROMs. This will require a little more work and a monitor with a Find

(F) or Word (W) command. These commands search memory and find a 2-byte sequence. The calls to the various cassette routines

must be found and replaced by the respective calls to ROM. The EDTASM to BASIC cassettes calls are:

The EDTASM routines that call the above starting addresses have to be found. Then the corresponding BASIC addresses have to be substituted.

Once the D.C.B.s and the CRT keyboard and printer drivers are replaced by ROM calls, the memory from 4300H to 45F5H can be deleted and is available for further EDTASM modifications.

The old cliché "Necessity is the Mother of Invention" is so

very true. I use all the routines just described in some form or another. I have both a Datel 1030 IBM-based Selectric and a Heath H-14 printer on line to my TRS-80. Both are RS-232, serial printers.

The Datel is driven by a homebrew printer interface that provides both line feed on carriage return and adjustable head retract delay time.

The H-14 is presently driven by a TRS-232 interface. Although these printer programs don't cure all the printer ills, they sure go a long way to provide hard copy from the EDTASM. ■

```

00100 ;*****
00110 ;*          AUTO REENTRY TO EDTASM          *
00120 ;*****
00130
00140 ; BY JOHN T. BLAIR WA4QHZ
00160
00170 ; THIS PROGRAM IS USED TO INSERT THE WARM RESTART
00180 ; VECTOR INTO THE ENTRY POINT POINTER, ALLOWING REENTRY
00190 ; TO EDTASM WITHOUT LOSING ANY TEXT ALREADY IN THE BUFFER.
00200 ; TO REENTER EDTASM TYPE:
00210 ; " SYSTEM " <ENTER>
00220 ; *? " / " <ENTER>
00230
00240
00250 ORG 4693H
00260
00270 LD HL,46DAH ;WARM RESTART ADDRESS
00280 LD (46DFH),HL ;STORE RESTART VECTOR IN
00290 ;ENTRY POINT POINTER
00300
00310 NOP
00320 NOP
00330 NOP
00340 NOP
00350 NOP
00360 END
00000 TOTAL ERRORS

```

Listing 7. Auto Reentry to EDTASM.








COVER YOUR INVESTMENT

- *Cloth Backed Neoprene Vinyl
- *Waterproof & Dustproof
- *Improved Reliability
- *Two Decorator Colors
- *Longer Life
- *Saddle Tan • Black

TRS-80 MODEL II \$22.95
Bundy and Coby 7.95

TRS-80 MODEL I \$1.95
Keyboard 1.95
Cassette 1.95
Video Display 1.95
Printer 1.95
Fax 1.95
Long Printer 1.95
Quick Printer 1.95

Full Approach \$12.95
Apple II Plus 1.95
Apple II Disk 1.95
Per Computer \$12.95
Per 2022 Printer 1.95
Per 2028 Printer 1.95
Toshiba 1.95
W. Blue 1.95
Contribution 1.95
C2 1.95
C2 1.95
C2 1.95

WAZEL FINE \$12.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95

CompuCover 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95
1020 1.95

Send check or money order to:
Include \$1.00 for postage and handling
Overseas orders include \$3.00 postage.
DEALER INQUIRES INVITED

CompuCover ✓ 100
P.O. Box 324 (Dept. C)
Mary Esther, FL 32569
Phone (904) 243-5793



Affordable A/D and D/A That Works in BASIC

Real World (Analog) to Digital Conversion for use in your BASIC programs with better than 0.5% accuracy. Digital to Analog real world audio, test, and control voltages generated with same accuracy by your programs. Easily incorporated into your present BASIC programs. Support software frees TRS-80* to run other programs concurrently, updating only when voltage changes occur. Expansion interface not required. BASIC or Machine Language with Level II. Usable with Level I 4K and TBUG (Machine Language only).

Ready to connect and use. Includes interface hardware, software documentation, and complete instructions. Assembled and tested: \$129.95. Florida residents add 4% sales tax.

Rand Laboratories ✓ 406
p.o. box 552
melbourne, florida 32901

*Tandy Corp. trademark.

✓ 240

COMPUTER FORMS

1-616-429-7922

**MICROCOMPUTER
PAPER PRODUCTS**

***ALL ITEMS BELOW: BLANK, WHITE, FANFOLD, TRACTOR (PINFEED) PAPER STOCK**

POSTCARD, QSL, CARD STOCK: 4"x6" (7" carrier width) 1/4" EXTRA MARGIN FOR 3-1/2"x5-1/2" CARDS (Meets P.O. Size & Thickness requirements)

250 cards . . \$5.95 500 cards . . \$9.95 1000 cards . . \$17.95

ADDRESS LABELS: 15/16" x 3-1/2", 2 labels across, Pressure Sensitive

250 labels . . \$2.95 500 labels . . \$5.95 1000 labels . . \$9.95

PAPER: 9-1/2"x11" [8-1/2"x11 w/1/2" perforated margins]

500 sheets . . \$6.95 1500 sheets . . \$16.95

3200 sheets . . \$29.95

Cash Order: Include \$2 for shipping charges, and the excess will be billed with your order. Credit Card Order: Shipping charges will be added to your order. Send all credit card information.

**CHECK
—OR—
MONEY ORDER**

VISA

COMPUTER FORMS, 5555 CARIBOU, STEVENSVILLE, MD 49127

"a phone call away from UPS delivery"

Use a BASIC program to take some of the pain out of machine code programming.

AUTOPOKE

Jasper E. Kump
PO Box 108
Pyatt AR 72672

Loading Machine Language

Normally, a machine-language program must be

loaded using the SYSTEM command, but using both loaded methods would have been

inconvenient. So I devised a loading method to load the machine-language routines with a BASIC routine and avoid the necessity of using the SYSTEM command. It would have been inconvenient also to have to load the T-BUG program every time I wanted to check and perhaps change a few locations in memory or write a machine-language routine.

The PEEK and POKE commands are too slow and cumbersome for this purpose. Besides, converting Z-80 instructions from hex to decimal for more than a number or two is a chore. I wrote the AUTOPOKE program as a solution to this problem and as an aid in writing the loading routine.

The method of loading machine-language routines with a BASIC routine requires writing data strings, which are prone to error. The second part to AUTOPOKE provides samples of what the data strings should look like—exact in the location of every letter, number and punctuation mark so that when you are writing a data string using the sample as a guide it is easy to spot some types of errors.

For example, if the last character on your line does not

One of the many advantages of TRS-80 Level II BASIC over Level I BASIC is the ability to use machine-language routines in conjunction with BASIC routines. Although it is a relatively easy language in which to write programs, in some cases, BASIC is inconveniently slow. On the other hand, machine-language routines will run fast enough for almost any purpose, but it is a much more difficult language to use.

In most programs the good features of both can be taken advantage of by combining the two. You can write the major part of the program in the much easier BASIC, using the much faster machine-language only for what would be, in BASIC, the time-consuming sections. I found that this system works very well. A few problems had to be solved first though.

```

64000 PRINT" ALL ENTRIES IN THIS PROGRAM MUST BE IN
      HEXIDECIMAL NOTATION EXCEPT THE LINE NUMBER OF THE
      FIRST DATA STRING."
64010 PRINT:PRINT"IF YOU WANT TO ENTER A NEW LINE NUMBE
      R, ENTER X.
      IF YOU WANT TO JUMP TO THE DATA STRING
      FORMAT SECTION, ENTER XX."
64100 PRINT:INPUT"ENTER THE ADDRESS YOU WANT TO EXAMINE
      OR CHANGE";A$:GOSUB64300:CLS
64110 D=Z:GOSUB64400:PRINT$;" ";D=PEEK(Z):GOSUB64400:
      PRINT$;" ";A$="":INPUTA$:IFA$=""THENZ=Z+1:GOTO64
      110
64120 IFA$="X"THEN64100
64130 IFA$="XX"THEN64200
64140 N=Z:GOSUB64300:POKEZ,Z=Z+1:GOTO64110
64200 INPUT"ENTER THE FIRST ADDRESS OF THE ROUTINE.";A$
      :GOSUB64300:M=Z:INPUT"AND THE LAST ADDRESS.";A$:GO
      SUB64300:INPUT"ENTER THE DECIMAL LINE NUMBER OF TH
      E FIRST DATA STRING.";D$
64210 PRINT"THE DECIMAL STARTING ADDRESS IS";M:PRINT"TO
      TAL BYTES IN THE ROUTINE.";Z=M+1:INPUT"PRESS ENTER
      FOR THE LISTING OF THE FIRST 60 BYTES OF THE
ROUT
      INE EXACTLY AS IT SHOULD APPEAR IN A DATA STRING.";
      X:J=M:CLS
64220 PRINT">";D$;"DATA";:FORI=JTOJ+59:N=PEEK(I):IFI>2T
      HEN64290
64230 IFN>99PS=RIGHT$(STR$(N),3):GOTO64260
64240 IFN>9PS=RIGHT$(STR$(N),2):GOTO64260
64250 PS=RIGHT$(STR$(N),1)
64260 PRINTPS;:IFI<J+59ANDI<ZPRINT";"
64270 NEXT:PRINT:INPUT"PRESS ENTER FOR THE NEXT 60 BYTE
      S.";A:J=J+60:X=VAL(D$)+10:Y=LEN(D$):D$=RIGHT$(STR$
      (X),Y):GOTO64220
64290 END
64300 F=16:Z=0:J=LEN(A$):FORK=1TOJ:D$(K)=MID$(A$,K,1):X
      =VAL(B$(K)):IFX>0THEN64330
64310 IFB$(K)="0"THEN64360
64320 X=ASC(B$(K))-55
64330 P=J-K
64340 IFP>0THENX=X*F:P=P-1:GOTO64340
64350 Z=Z+X
64360 NEXT:RETURN
64400 N=1:IFD>255N=3
64410 H$="":FORI=NTOSTEP-1:K=INT(D/F[I]):D=D-K*F[I:IFK>
      9THENH$=H$+CHR$(K+55):NEXTELSEH$=H$+RIGHT$(CHR$(K+
      48),1):NEXT
64420 RETURN

```

Program listing

PROFESSIONAL

**HALF A MILLION TAX RETURNS CAN'T BE WRONG!
(OR THEY HAD BETTER NOT BE)**



INCOME TAX SYSTEM FOR TRS-80* MODEL I OR II

Our system, which prepared 500,000 1979 returns, features the following:

1. Full interactive user control, in **tax-form language only**, line-by-line.
2. Screen display of full 1040 and all schedules, prior to printout.
3. Change of a single amount item automatically changes and re-computes entire return.
4. All printout formats IRS and state approved.
5. Stores Preparer's Identification for automatic printing at bottom of page 2.
6. Built-in Validation Check tests entire system, hardware and software.
7. Special Printer Adjustment routines, Line Length, etc.
8. Selection of closed or open output formats—for standard Form 1040 or open name-box types.
9. **Software control of text position on page.** Makes forms-alignment simple. Permits use with non-adjustable printers.
10. Fills in pre-printed Forms or you can use overlays. Your choice.
11. Automatically computes: Tax - SDI Overpayment - Wages Total from W-2's - Earned Income Credit - Income Averaging - Maximum/Minimum Tax - Least Tax Method - All Percentage of Income Limitations - All Fixed Limitations - many, many more.
12. Full support through the tax season — no charge.
13. Inexpensive yearly updates in accordance with tax-law changes.
14. Modular construction — lets you order only the type and size system you need.

PRICING STARTS AT \$189.95 (1040 & SCHEDULE A)

25-PAGE DESCRIPTIVE MANUAL \$7.50 (Refunded on Order)

MINIMUM SYSTEM REQUIRED: MODEL I, 32K, 1 DISK DRIVE

*TRS-80 IS A TRADEMARK OF TANDY CORP.

CONTRACT SERVICES ASSOCIATES

706 SOUTH EUCLID

ANAHEIM, CA 92802

TELEPHONE (714) 635-4055

★ ★ ★ 20 YEARS OF SERVICE ★ ★ ★

MACO MICRO MODULE

...TRS-80 USERS...

Expand the horizons of your Level II R-S system with the M3 Interactive Interface.

HARDWARE FEATURES:

- Two 8-bit hand-controller input ports.
- 1/10 second interrupt generator for use as a timer or Real-Time clock.
- Audio generator with speaker.
- Connects to expansion connector with provided cable.
- Self-contained power supply.
- Presents only one LSTTL load on the TRS-80 Bus.

SOFTWARE FEATURES:

- Software package includes: TRS-80 Brickyard, Micro-Organ, Real-Time Clock, Comput-a-Sketch.
- Complete programming instructions for BASIC and Assembly Language provided.

All M3 units are factory burnt in and CPU tested. Please specify memory size when ordering. Dealer inquiries are invited. . . . **PRICE: \$129.95.**

Ordering: Money Order or Check—we pay freight charges. VISA, MC, or C.O.D.—freight added to bill. On charge cards please include complete number as well as your complete address.

MACO MANUFACTURING

1383 Airways Blvd. • Memphis, Tenn. 38114
Telephone (901) 452-9510 ✓318


"TRS-80" is a trademark of Tandy Corp.

THE GREEN SCREEN THING

(The Green Thing is custom design to fit your TRS-80. It mounts in seconds without any tools.)

Model SC-80

The Green Thing from the manufacturers of Homes for the TRS-80, is compared on our CF-80 High Quality console to the normal display, as seen on our CF-90 Economy console. (For further information on consoles, see our other ad.)

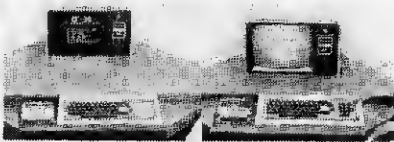

CF-80 With

CF-90 Without

List \$795

(Add \$100 for shipping & handling, and California residents add 6% sales tax)

FEATURES:

- Improved image contrast
- Reduces eye fatigue
- Enhances screen legibility
- Decreases glare
- Gives system a professional look

ORDER NOW

24 HOUR

PM 408-946-1265



✓146
AVS

AUDIO-VIDEO SYSTEMS

2485 Autumnval Ave.

San Jose, CA 95132

"EASY-WORD"

A WORD PROCESSOR

for only \$21.95

Required: TRS-80, 16K, TAPE, PRINTER

Some of "EASY WORD" many features

- JUSTIFY • STANDARD KEYBOARD
- UPPER CASE INDICATOR • VISUAL TABS
- LINE, CHANGE, DELETE, INSERT, APPEND
- WORD, CHANGE, DELETE, INSERT, APPEND
- CENTER, SORT, AND MORE

CDOWN. RESIDENTS ADD 7%



HANSON HOUSE
55 HANSON PLACE
STRATFORD, CT 06497



✓317

Factory Direct Products for Your NEW! Computer & Your Home NEW! the BRUTES™

Heavy duty solid-state AC switches control your water heater or other heavy loads. Opto-isolated - 1500VAC isolation. All units pretested & baked in oven. TTL logic level compatible - 5V @ 20-50 ma

TA-4020	120/240VAC @ 40A	\$49.95
TA-8020	480 VAC @ 40A	\$49.95
TA-2030	120 VAC @ 60A	\$99.95
TA-4030	240 VAC @ 60A	\$99.95

the WATCHDOG™ \$29.95

Power failure plugs into standard outlet. Audible buzzer lets you know immediately when power fails. Alerts you to check your freezer, compressors, alarm clock, and other critical devices you depend on

the SPIKE-SPIKER™ \$44.95

Power console w/solid-state transient absorber plus conducted RF "hash" filters. Compact desktop unit comes complete with integral on-off switch, fuse, pilot light, and 8 120 VAC protected & individually switched convenience outlets. Helps protect valuable equipment from lightning, power line transients and other interference. Makes it easy to turn off all your equipment at one time. No more unplugging & replugging a zillion power cords.

Kalglo Electronics Co. Inc. ✓353

Colony Drive P.O. Box 2062, Bethlehem, PA 18001

215-865-0006

Out of state call toll free 1-800-523-9685

Master Charge, VISA, Check w/order or COD

TRS-80

SPEEDUP BOARD REVERSE VIDEO

SPEED MOD—You don't have to spend \$3,500 on a TRS-80 Model II to get faster computing. Now you can speedup your Level II TRS-80—Disk systems included!—by up to 100% (50% guaranteed) with our speedup board. The result is more animated graphics, shorter program run times, and generally far greater computing power for your dollar. Change between normal and faster operation by using a simple BASIC statement. The contents of memory are not affected by speed changes and a switch is not required (a switch may be installed if manual speed select is desired). Changes are provided for NEWDOS, DOS 2.2, and DOS 2.3 that allow disk systems to run reliably at both the normal and accelerated rate. Buy the most versatile, easiest to install, and most publicly recognized speed mod on the market today. Recommended by *Interface Age*, January, 1980 issue.

ASSEMBLED & TESTED \$24.95

REVERSE VIDEO is finally here! If you're tired of going blurry-eyed looking at your video display, then you are ready for reverse video. It provides dark black characters and graphics on an all white screen for a much crisper and much easier to read presentation. Change between normal and reverse by simultaneously pressing a combination of three keys on the keyboard.

ASSEMBLED \$23.95

Add 5% for postage and handling
California residents add 6% sales tax

Archbold Electronics

Dept 80 • P.O. Box 7123 • Sacramento, CA 95826
916-635-5408 ✓122

— Professional — Real Estate Software For Apple or TRS-80

Property Management System (32K, 1 Disk Systems)

Features:

- Tenant Information
- Late Rent Reports
- YTD & Monthly Income
- Handles —
Partial Payments
Returned Checks
Advance Payments
• Prints Receipts
- 5 Digit Expense Accounts
- Building Expense Report
- Vendor Expense Report
- Income Tax Report
- All Reports Can Be Printed
- Complete Documentation
- Easy Data Entry & Edit
- 200 Units per File

Price \$225.00

Real Estate Analysis Modules:

(Cassette or Disk)

- 1) Home Purchase Analysis
- 2) Tax Deferred Exchange
- 3) Construction Cost/Profit
- 4) Income Property Cashflow
- 5) APR Loan Analysis
- 6) Property Sales Analysis
- 7) Loan Amortization

\$35 Per Module

At Computer Stores Everywhere
Or Order COD Direct
(Cal Residents Add 6% Sales Tax)
(213) 372-9419

Real Estate Software
Real Estate Company ✓372

Dept. M 2045 Manhattan Ave., Hermosa Beach, CA 90254

WHAT IS "THE PATCH"?

We asked ourselves; WHY should our computer be as bland as everybody else's? Why not unlock the unused and wasted abilities available within each and every TRS-80 Model I. These abilities allow the display to be dressed up and the computer to be effectively easier to use.

Now we have developed the means for getting the most from our computers and we know you need it too. With "THE PATCH", a new age of simplicity and convenience has arrived. You don't want to be left out, so don't kid yourself, you need the enhancements which "THE PATCH" provides.

* Does your keyboard bounce?

Some say, "I have a software fix for that!"

* Does your display still have that standard, dull, underline cursor?

Some brag, "We have a program which will give you a Block cursor, and it even blinks!"

* Does your Dualcase printer make you look foolish when you tell it to print lowercase because you could only see UPPERcase on the display?

Most cry, "We have a kit you can install . . . and a program to run it!!!"

* Don't you have better uses for protected memory than to waste it on programs which are TOTALLY UNNECESSARY?

You sob, "I need all those advantages but they are just too much trouble to have all at once so I'll make do with what I have."

FORGET ALL THAT . . . make your life easier

What we are trying to tell you is:

1. You CAN have Keyboard debounce if you need it!
2. You CAN have Block cursor with NO distracting blinking!
3. You CAN have FULL TIME Dualcase display!
4. You CAN have typewriter style keyboard operation!
5. You CAN have faster cassette data files, up to four and one-half times faster!
6. You CAN have even more features as we make them available.

All this from THE INSTANT you power up your computer, without making your other programs unusable because some unnecessary driver program is eating that memory.

"THE PATCH" is not a ROM. "THE PATCH" is not a PROM. "THE PATCH" is a microprocessor which modifies the Level II ROM to repair changes made by TANDY when they designed your computer. This state-of-the-art technology makes these changes possible without using ANY of your computer's memory. That means, any program you use on your computer now, will still work after you install "THE PATCH", including word processors.

"THE PATCH" fits easily into the Level II ROM sockets inside your computer, no cables or switches to install.

Sound too good to be true? Call us. Tell us your innermost fears. Let us answer your questions. Do not cheat yourself out of using ALL of your computer's abilities ALL of the time.

"THE PATCH" costs just \$25.00 plus \$2.50 shipping and handling.
Full-time: Block cursor, N/C, underline cursor, N/C
Cassette file \$10.00
WIDE or NARROW ENTRY MODELS

TRS-80 is a trademark of Tandy Corp.
"THE PATCH" is a trademark of CEDAR, Inc.

CALL 204-863-0811
WRITE CEDAR "THE PATCH"
Box 7073
Hermosa Beach, CA 90254

match the last character on the corresponding line of the sample, you will know immediately that an error has been made. This will not detect a mistyped number, naturally, but it does detect errors of omission and keybounce. To check for mistyped numbers, stop the program after the machine language loading routine and then use AUTOPOKE to run through what was loaded and check it against your listing.

Two other pieces of information you will need for the loading routine are also supplied by AUTOPOKE. They are the decimal starting address of the routine and the number of bytes in the routine. Example 1 illustrates how to write the BASIC routine for this loading method.

The object code for the routine, in decimal form, is written in one or more data strings. The FOR-NEXT loop on the next line reads the data strings and pokes the object code into its proper place.

There is a handy by-product of this method of loading. If you were using the normal method of loading a machine-language routine, such as T-BUG or AUTOPOKE, and one or more bytes had to be inserted into the routine, every byte from the point of the insertion to the end of the routine would have to be retyped to relocate it. Not with this loading system!

All you have to do is insert the additions into the data string at the proper place and increase the number of bytes to be read

7C00 3E 00	LD A,N	Address 7D01, shown here as 00 will be loaded in BASIC with the number of a routine.
7D02 FE 01	CP N	See if A = 1
7D04 C2 00 70	JP Z	If it does jump to 7000
7D07 FE 02	CP N	See if A = 2
7D09 C2 A4 70	JP Z	If it does jump to 70A4
Etc.		

Example 2.

```
1000 DATA33,0,50,31,4,175,119,35,254,255,294,6,112,29,194,5,112,201
1010 FOR I = 28872 TO 28889:READJ:POKEI,J:NEXT
```

Example 1.

by the FOR-NEXT loop. The next time the routine is loaded, your additions will be loaded into their addresses and the remainder of the routine will be automatically relocated according to the number of bytes that were added. The only other thing you have to do is take care of any jump or call addresses that might have been affected.

I have used the word "routines" a number of times. The Level II BASIC manual says that there is only one USR call allowed unless you have Level II Disk BASIC. Although this is true, it does not limit you to one machine-language routine! It only limits you to one address

that you can call with the USR command. If, at that one address, you have a routine to jump to the starting addresses of other routines according to some sort of coding, you can use as many machine-language routines as you need. Example 2 shows how such a routine might be written. Immediately before each USR call in your BASIC program, POKE into address 7D01 (32001 decimal) the number of the routine you want to use at that time.

I hope you find the AUTOPOKE program and this method of loading machine-language routines as helpful as I have. ■


MAGNETIC MEDIA DISTRIBUTORS

596 Taylor Way Belmont, California 94002 (415) 595-0684

Flip Sort™ DISK STORAGE SYSTEM

Keeps dust
off of disks

Built-in
plastic file
separators



Formed from
transparent
smoke colored
acrylic

50 to 60 Disk
capacity

For Mini-Disks \$34.95
For 8" Disks \$44.95

plus \$3.00 shipping for each
Flip Sort™

DEALER INQUIRIES INVITED

FLOPPY DISKS FOR ALL COMPUTERS

5 1/4" DISKETTES

Diskettes available in Soft Sector, 10 or 16 hole Hard Sector

	1-99	100-UP
Single Side-Single Density (Certified 35 tracks)	\$ 2.85	\$ 2.60
Single Side-Double Density (Certified 40 tracks)	\$ 3.75	\$ 3.55
Double Side-Double Density (Quad Density)	\$ 4.50	\$ 4.30
Single Side-Double Density (Certified 77 tracks)	\$ 4.00	\$ 3.80

8" DISKS

Single Side-Single Density (Soft Sectors)	\$ 3.40	\$ 3.20
Single Side-Double Density (Soft Sectors)	\$ 4.60	\$ 4.40
Double Side-Single Density (Soft Sectors)	\$ 4.95	\$ 4.75
Double Side-Double Density (Soft Sectors)	\$ 5.10	\$ 4.90

Single Side-Single Density (Hard Sector 32 hole)	\$ 3.60	\$ 3.40
Single Side-Double Density (Hard Sector 32 hole)	\$ 4.00	\$ 3.80
Single Side-Single Density (Hard Sector 32 hole)	\$ 4.65	\$ 4.50

(MRX 651 compatible OD holes)
We stock VERBATIM, WABASH, KYBE, KEYLINE & ATLANTIS
Disks and Diskettes at LOW, LOW, prices. Write for our mini
catalogue.

VINYL DISK SLEEVES for 5 1/4 and 8" Disks \$ 9.00 10pak
PLASTIC LIBRARY CASES 8" \$ 4.50 5 1/4" \$ 3.50
FLOPPY SAVER (Hub Reinforcing Rings
5 1/4" with applying tool \$ 14.95 pk of 25 Refills \$ 7.95
8" with applying tool \$ 16.95 pk of 25 Refills \$ 8.95

CALL TOLL FREE TO ORDER
800 227-7362
IN CALIFORNIA 415 595-0685



*Utilize the unused ICs in your TRS-80
and turn it into a half duplex terminal.*

300 Baud Terminal

Timothy Loos
50 Depot St.
Athens OH 45701

It's easy to add I/O to the TRS-80 using its unused ICs: just cut a few foils and add a few jumpers. This will give you a single input and output port. Big deal, you might say, but with a little software they can be used as serial input and out-

put ports. To illustrate what can be done with serial I/O, this article will tell you how to turn your TRS-80 into a 300-baud half-duplex terminal. The best part of this project is that no extra hardware is needed; there is no need for a fancy and expensive interface unit.

The schematic for the I/O ports is given in Fig. 1. (For more information about the internal workings of the TRS-80 refer to the TRS-80 *Microcomputer Technical Reference Handbook*, RS catalog no. 26-2103.)

You must first carefully take apart your TRS-80 and expose the main PC board. Find ICZ60. All the ICs are well marked. Photo 1 shows the bottom of the main PC board. The small board on the lower right is the Level II ROM board. It is covering up half of ICZ60. Unsolder Z60 and cut the foils connecting pins 12,14,15 together to ground. Now is a good time to put in a socket for ICZ60. (Molex pins are actually preferable, since they enable you to get to the foils under the IC.)

Next, cut the foils on ICZ7

that connect pins 10,11,12,13 together to ground. The foils are on the bottom side of the PC board so that you do not need to unsolder the IC.

Make the following connections on the bottom side of the PC board (i.e., the side the ICs are not on):

1. Connect pins 1,10,13 of Z7 together.
2. Connect pins 13 of Z24 to pin 11 of ICZ7.
3. Connect pin 11 of Z44 to pin

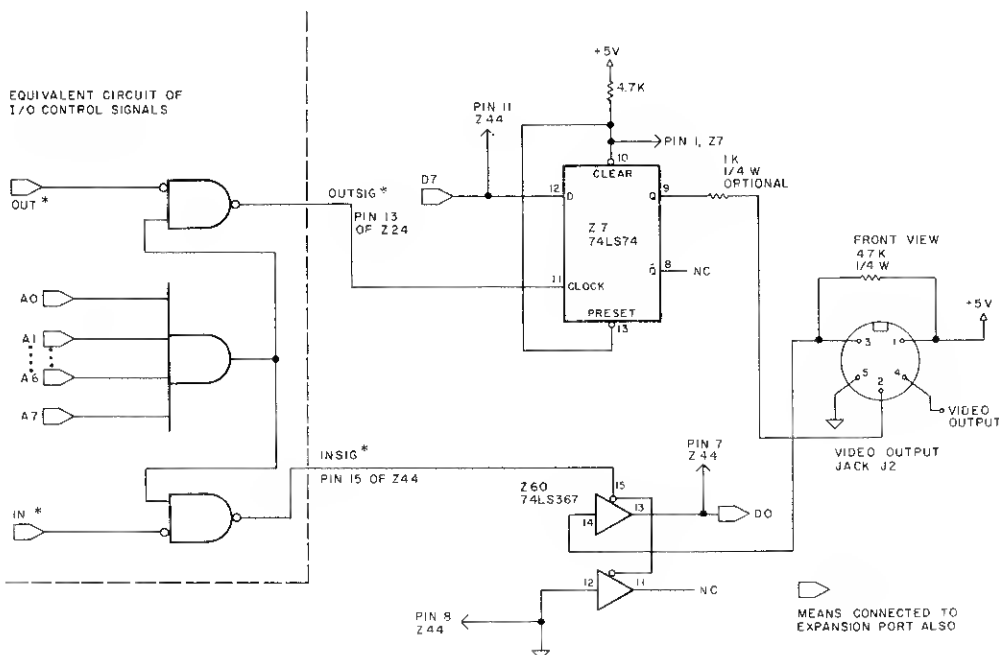


Fig. 1. TRS-80 input/output port schematic.

Table 1.

***** BASIC PROGRAM FOR THE 80 *****									
10	DATA	END	PROGRAM	FOR	THE	80			
20	DATA	END	PROGRAM	FOR	THE	80			
30	DATA	END	PROGRAM	FOR	THE	80			
40	DATA	END	PROGRAM	FOR	THE	80			
50	DATA	END	PROGRAM	FOR	THE	80			
60	DATA	END	PROGRAM	FOR	THE	80			
70	DATA	END	PROGRAM	FOR	THE	80			
80	DATA	END	PROGRAM	FOR	THE	80			
90	DATA	END	PROGRAM	FOR	THE	80			
100	DATA	END	PROGRAM	FOR	THE	80			
110	DATA	END	PROGRAM	FOR	THE	80			
120	DATA	END	PROGRAM	FOR	THE	80			
130	DATA	END	PROGRAM	FOR	THE	80			
140	DATA	END	PROGRAM	FOR	THE	80			
150	DATA	END	PROGRAM	FOR	THE	80			
160	DATA	END	PROGRAM	FOR	THE	80			
170	DATA	END	PROGRAM	FOR	THE	80			
180	DATA	END	PROGRAM	FOR	THE	80			
190	DATA	END	PROGRAM	FOR	THE	80			
200	DATA	END	PROGRAM	FOR	THE	80			
210	DATA	END	PROGRAM	FOR	THE	80			
220	DATA	END	PROGRAM	FOR	THE	80			
230	DATA	END	PROGRAM	FOR	THE	80			
240	DATA	END	PROGRAM	FOR	THE	80			
250	DATA	END	PROGRAM	FOR	THE	80			
260	DATA	END	PROGRAM	FOR	THE	80			
270	DATA	END	PROGRAM	FOR	THE	80			
280	DATA	END	PROGRAM	FOR	THE	80			
290	DATA	END	PROGRAM	FOR	THE	80			
300	DATA	END	PROGRAM	FOR	THE	80			

```

100 115
100 STARTING LOCATION IS 4000 HEX =19968 DECIMAL
101 THIS PROGRAM LOADS OCTAL VALUES INTO MEMORY
200 POKING PROGRAM INTO MEMORY
310 GOSUB 6000
400 POKING USER'S STARTING ADDRESS
500 POK 16526,109 : POK 16527,78
600 POKING NEW LINE PRINTER DRIVER ADDRESS
700 POK 16442,160 : POK 16443,78
800 POKING LINE PRINTER PROGRAM IS NOW ENTERED
910 : POK 16444,109
9999 L=INT(10/255) : OCTAL TO DECIMAL CONVERSION
9005 PRINT "L=";L;"(100/10)"
9010 PRINT "L=";L;"(100/10)"
9020 RETURN
9030 : L=100 : OUTPUT SUBROUTINE
9035 DATA 305,325,345,247,333,111,116,356
9040 DATA 200,127,336,010,257,333,377,001
9045 DATA 214,000,315,061,116,172,315,164
9050 DATA 116,000,001,214,000,315,061,116
9055 DATA 035,302,125,116,076,200,323,377
9060 DATA 001,214,000,315,061,116,341,321
9065 DATA 301,170,311,017,127,346,200,323
9070 DATA 53,7,1
9075 THIS IS TIMER 2 SUB. STROKE AT 116-061
9080 DATA 16,333,347,346,001,171,260,302
9085 DATA 061,116,311
9090 DATA INPUT ROUTINE STARTS AT 116-000
9095 DATA 305,325,345,021,010,000,333,377
9100 DATA 346,001,302,006,116,001,322,000
9105 DATA 311,061,116,333,377,346,001,202
9110
9115 DATA 017,127,341,000,315,061,116
9120 DATA 035,302,125,116,076,200,323,377
9125 DATA 001,214,000,315,061,116,341,321
9130 DATA 301,170,311,017,127,346,200,323
9135 DATA 53,7,1
9140
9145 DATA 16,333,347,346,001,171,260,302
9150 DATA 061,116,311
9155 DATA INPUT ROUTINE STARTS AT 116-000
9160 DATA 305,325,345,021,010,000,333,377
9165 DATA 346,001,302,006,116,001,322,000
9170 DATA 311,061,116,333,377,346,001,202
9175
9180 DATA 017,127,341,000,315,061,116
9185 DATA 035,302,125,116,076,200,323,377
9190 DATA 001,214,000,315,061,116,341,321
9195 DATA 301,170,311,017,127,346,200,323
9200 DATA 53,7,1
9205
9210 DATA 16,333,347,346,001,171,260,302
9215 DATA 061,116,311
9220 DATA INPUT ROUTINE STARTS AT 116-000
9225 DATA 305,325,345,021,010,000,333,377
9230 DATA 346,001,302,006,116,001,322,000
9235 DATA 311,061,116,333,377,346,001,202
9240
9245 DATA 017,127,341,000,315,061,116
9250 DATA 035,302,125,116,076,200,323,377
9255 DATA 001,214,000,315,061,116,341,321
9260 DATA 301,170,311,017,127,346,200,323
9265 DATA 53,7,1
9270
9275 DATA 16,333,347,346,001,171,260,302
9280 DATA 061,116,311
9285 DATA INPUT ROUTINE STARTS AT 116-000
9290 DATA 305,325,345,021,010,000,333,377
9295 DATA 346,001,302,006,116,001,322,000
9300 DATA 311,061,116,333,377,346,001,202
9305
9310 DATA 017,127,341,000,315,061,116
9315 DATA 035,302,125,116,076,200,323,377
9320 DATA 001,214,000,315,061,116,341,321
9325 DATA 301,170,311,017,127,346,200,323
9330 DATA 53,7,1
9335
9340 DATA 16,333,347,346,001,171,260,302
9345 DATA 061,116,311
9350 DATA INPUT ROUTINE STARTS AT 116-000
9355 DATA 305,325,345,021,010,000,333,377
9360 DATA 346,001,302,006,116,001,322,000
9365 DATA 311,061,116,333,377,346,001,202
9370
9375 DATA 017,127,341,000,315,061,116
9380 DATA 035,302,125,116,076,200,323,377
9385 DATA 001,214,000,315,061,116,341,321
9390 DATA 301,170,311,017,127,346,200,323
9395 DATA 53,7,1
9400
9405 DATA 16,333,347,346,001,171,260,302
9410 DATA 061,116,311
9415 DATA INPUT ROUTINE STARTS AT 116-000
9420 DATA 305,325,345,021,010,000,333,377
9425 DATA 346,001,302,006,116,001,322,000
9430 DATA 311,061,116,333,377,346,001,202
9435
9440 DATA 017,127,341,000,315,061,116
9445 DATA 035,302,125,116,076,200,323,377
9450 DATA 001,214,000,315,061,116,341,321
9455 DATA 301,170,311,017,127,346,200,323
9460 DATA 53,7,1
9465
9470 DATA 16,333,347,346,001,171,260,302
9475 DATA 061,116,311
9480 DATA INPUT ROUTINE STARTS AT 116-000
9485 DATA 305,325,345,021,010,000,333,377
9490 DATA 346,001,302,006,116,001,322,000
9495 DATA 311,061,116,333,377,346,001,202
9500
9505 DATA 017,127,341,000,315,061,116
9510 DATA 035,302,125,116,076,200,323,377
9515 DATA 001,214,000,315,061,116,341,321
9520 DATA 301,170,311,017,127,346,200,323
9525 DATA 53,7,1
9530
9535 DATA 16,333,347,346,001,171,260,302
9540 DATA 061,116,311
9545 DATA INPUT ROUTINE STARTS AT 116-000
9550 DATA 305,325,345,021,010,000,333,377
9555 DATA 346,001,302,006,116,001,322,000
9560 DATA 311,061,116,333,377,346,001,202
9565
9570 DATA 017,127,341,000,315,061,116
9575 DATA 035,302,125,116,076,200,323,377
9580 DATA 001,214,000,315,061,116,341,321
9585 DATA 301,170,311,017,127,346,200,323
9590 DATA 53,7,1
9595
9600 DATA 16,333,347,346,001,171,260,302
9605 DATA 061,116,311
9610 DATA INPUT ROUTINE STARTS AT 116-000
9615 DATA 305,325,345,021,010,000,333,377
9620 DATA 346,001,302,006,116,001,322,000
9625 DATA 311,061,116,333,377,346,001,202
9630
9635 DATA 017,127,341,000,315,061,116
9640 DATA 035,302,125,116,076,200,323,377
9645 DATA 001,214,000,315,061,116,341,321
9650 DATA 301,170,311,017,127,346,200,323
9655 DATA 53,7,1
9660
9665 DATA 16,333,347,346,001,171,260,302
9670 DATA 061,116,311
9675 DATA INPUT ROUTINE STARTS AT 116-000
9680 DATA 305,325,345,021,010,000,333,377
9685 DATA 346,001,302,006,116,001,322,000
9690 DATA 311,061,116,333,377,346,001,202
9695
9700 DATA 017,127,341,000,315,061,116
9705 DATA 035,302,125,116,076,200,323,377
9710 DATA 001,214,000,315,061,116,341,321
9715 DATA 301,170,311,017,127,346,200,323
9720 DATA 53,7,1
9725
9730 DATA 16,333,347,346,001,171,260,302
9735 DATA 061,116,311
9740 DATA INPUT ROUTINE STARTS AT 116-000
9745 DATA 305,325,345,021,010,000,333,377
9750 DATA 346,001,302,006,116,001,322,000
9755 DATA 311,061,116,333,377,346,001,202
9760
9765 DATA 017,127,341,000,315,061,116
9770 DATA 035,302,125,116,076,200,323,377
9775 DATA 001,214,000,315,061,116,341,321
9780 DATA 301,170,311,017,127,346,200,323
9785 DATA 53,7,1
9790
9795 DATA 16,333,347,346,001,171,260,302
9800 DATA 061,116,311
9805 DATA INPUT ROUTINE STARTS AT 116-000
9810 DATA 305,325,345,021,010,000,333,377
9815 DATA 346,001,302,006,116,001,322,000
9820 DATA 311,061,116,333,377,346,001,202
9825
9830 DATA 017,127,341,000,315,061,116
9835 DATA 035,302,125,116,076,200,323,377
9840 DATA 001,214,000,315,061,116,341,321
9845 DATA 301,170,311,017,127,346,200,323
9850 DATA 53,7,1
9855
9860 DATA 16,333,347,346,001,171,260,302
9865 DATA 061,116,311
9870 DATA INPUT ROUTINE STARTS AT 116-000
9875 DATA 305,325,345,021,010,000,333,377
9880 DATA 346,001,302,006,116,001,322,000
9885 DATA 311,061,116,333,377,346,001,202
9890
9895 DATA 017,127,341,000,315,061,116
9900 DATA 035,302,125,116,076,200,323,377
9905 DATA 001,214,000,315,061,116,341,321
9910 DATA 301,170,311,017,127,346,200,323
9915 DATA 53,7,1
9920
9925 DATA 16,333,347,346,001,171,260,302
9930 DATA 061,116,311
9935 DATA INPUT ROUTINE STARTS AT 116-000
9940 DATA 305,325,345,021,010,000,333,377
9945 DATA 346,001,302,006,116,001,322,000
9950 DATA 311,061,116,333,377,346,001,202
9955
9960 DATA 017,127,341,000,315,061,116
9965 DATA 035,302,125,116,076,200,323,377
9970 DATA 001,214,000,315,061,116,341,321
9975 DATA 301,170,311,017,127,346,200,323
9980 DATA 53,7,1
9985
9990 DATA 16,333,347,346,001,171,260,302
9995 DATA 061,116,311

```

Program listing.

12 of 27.

- Connect pin 9 of Z7 to pin 2 of the video output jack, through a 1k 1/4 Watt resistor. (Omit resistor and direct connect if you are going to use LSTTL circuitry instead of the optoisolator circuitry given in Fig. 2.)
- Connect pins 1 and 3 of the video output jack together through a 4.7k Ohm 1/4 Watt resistor.

- Connect pin 14 of Z60 to video output jack pin 3.
- Connect pin 15 of Z60 to pin 15 of Z44.
- Connect pin 13 of Z60 to Z44 pin 7.
- Connect pin 12 of Z60 to pin 8 of Z44.

Phew...you are now finished. Reassemble the TRS-80.

The last thing you must do is make extra connections on


pins 2,3 and 5 of the DIN connector that plugs into the video output jack. Pin 2 is the port output. Pin 3 is the port input and pin 5 is ground. Be careful with all connections, since it is possible to short out the +5 supply (pin 1) and the video output (pin 4). If you have the Radio Shack video monitor you might have to buy another DIN connector, since they are pre-

molded assemblies and might be hard to take apart. Radio Shack stores sell DIN connectors.

Controlling the Ports

To read the input port in Level II BASIC, use the statement Y=INP(225). The lowest bit, D0, of Y will be the input port bit. In machine language, use the command IN FF, fol-

116-	5	0	333	IN	PORT VALUE
116-	377	7	345	ANI	MASK TO SELECT DO BIT
116-	11	1	302	JNZ	LOOP UNTIL START BIT
116-	13	5			IS FOUND
116-	14	1	LXI	B	
116-	15	1	322		DELAY VALUE
116-	17	0			(002-103 FOR 110 BAUD)
116-	20	315	CALL		TIMER DELAY SUBROUTINE
116-	21	61			
116-	22	116			
116-	23	333	IN		MASK TO READ DO BIT
116-	24	377			
116-	25	345	ANI		
116-	26	1			
116-	27	202	AND	B	SHIFT A TO RIGHT
116-	30	17	RRC		SAVE A IN D
116-	31	127	MOV	D,A	DELAY VALUE
116-	32	1	LXI	B	(002-202 FOR 110 BAUD)
116-	33	214			
116-	34	0			CALL TIMER SUB.
116-	35	315	CALL		
116-	36	61			
116-	37	116			
116-	40	35	DEC	E	DECREMENT BIT COUNTER
116-	41	302	JNZ		ALL BITS IN?
116-	42	23			GO FETCH ANOTHER
116-	43	116			
116-	44	172	MOV	A,D	PUT CHAR BACK INTO A
116-	45	0	NOFS		
116-	46	0			
116-	47	0			
116-	50	0			STRIP PARITY BIT AWAY
116-	51	345	ANI		
116-	52	177			RESTORE REGISTERS
116-	53	341	POP	H	
116-	54	321	POP	D	
116-	55	301	POP	B	
116-	56	311	RET		
116-	57	0	NOFS		
116-	60	0			
116-	61				*****
116-	62				TIMER DELAY SUBROUTINE
116-	63	13	DCX	B	DECREMENT LOOP COUNTER
116-	64	333	IN		DELAY INSTRUCTION ONLY
116-	65	377			
116-	66	345	ANI		INSTRUCTION FOR DELAY ONLY
116-	67	171			
116-	68	260	ORA	B	INSTRUCTION FOR DELAY ONLY
116-	70	302	JNZ		IS EC 0?
116-	71	61			LOOP UNTIL FINISHED
116-	72	116			
116-	73	311	RET		
116-	74				*****
116-	75				OUTPUT UART ROUTINE
116-	100	305	PUSH	B	
116-	101	325	PUSH	D	
116-	102	345	PUSH	H	
116-	103	247	ANA	A	SET PARITY FLAGS
116-	104	352	JPE		IF EVEN PARITY JUMP
116-	105	141			
116-	106	116			MAKE A REG EVEN PARITY
116-	107	356	XRI		
116-	110	200			
116-	111	127	MOV	L,A	SAVE A IN D
116-	112	36	MOVI	E	NO OF WORD BITS IN E
116-	113	10			
116-	114	267	XRA	A	ZERO A REG
116-	115	323	OUT		OUTPUT START BIT
116-	116	377	PORT		
116-	117	1	LXI	B	(002-202 FOR 110 BAUD)
116-	120	214			
116-	121	0			
116-	122	315	CALL		TIMER DELAY SUB.
116-	123	61			
116-	124	116			
116-	125	172	MOV	A,E	MOV CHAR TO A

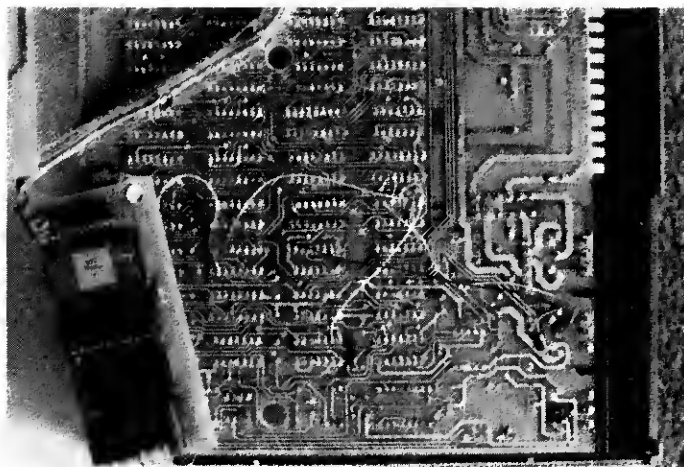

Underside of the TRS-80 main PC board, showing the locations of ICs and the video output jack.

lowed by AND A immediate with 01. This will input D0 into the A register.

The output port is controlled by the BASIC statements OUT 255,0 to output a 0 and OUT 255,128 to output a 1. Note that setting bits D0 and D1 under the OUT 255 command activates the cassette output, setting bit D2 activates the tape relay and D3 activates the double-sized characters. Therefore, make sure you set bit D7 only. The machine language commands are LDA 80, OUT FF

to output a 1 and LDA 00, OUT FF to output a 0.

Fig. 2 shows an optoisolator circuit that can be used with the input and output port. The circuit provides isolation between the TRS-80 and the external circuitry. This circuit is optional, but I think that it is a good idea to have such a circuit since your TRS-80 is isolated from your I/O external circuitry. If your external device accidentally shorts out or applies the wrong voltage, your TRS-80 will be safe. It also helps elimin-

ate ground loops, etc.

UART Program Description

The software necessary to operate the input and output port as a 300 baud serial input and serial output port is listed in Table 1. This program is adapted from Dan Stogdill's article, "Experiments in Software" (May, 1978 *Kilobaud*, p. 44). For a Level II, 4K system the

program is stored in memory at location 116-000 octal. The program is designed to be called using the USR(n) function of Level II BASIC. Alternately, it can be run by typing SYSTEM followed by /20157, the decimal starting address of the machine-language program.

The program is divided into five routines:

Routine A—The output UART

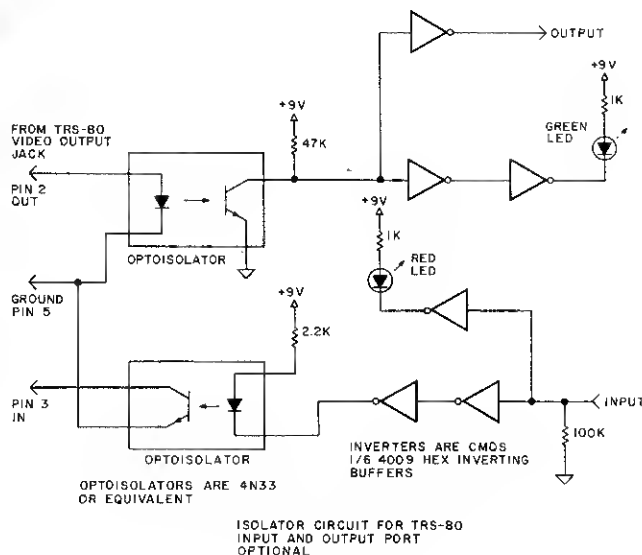


Fig. 2. An optional isolator circuit for TRS-80 input and output port. Optoisolators are 4N33 or equivalent. Inverters are CMOS 1/6 4009 hex inverting buffers.

```

116- 126 315 CALL
116- 127 163
116- 130 116
116- 131 0 NOP
116- 132 1 LX1 B
116- 133 214
116- 134 0
116- 135 315 CALL
116- 136 61
116- 137 116
116- 140 35 RCR E
116- 141 302 JNZ
116- 142 125
116- 143 116
116- 144 76 MVI A
116- 145 200
116- 146 323 OUT
116- 147 377
116- 150 1 LX1 B
116- 151 214
116- 152 0
116- 153 315 CALL
116- 154 61
116- 155 116
116- 156 341 POP H
116- 157 321 POP D
116- 158 345 ANI
116- 159 200
116- 160 301 POP B
116- 161 170 MOV A,B
116- 162 341 RET
116- 163 PATCH **
116- 164 17 RRC
116- 165 127 MOV D,A
116- 166 345 ANI
116- 167 200
116- 168 323 OUT
116- 169 377
116- 170 311 RET
116- 171 311 RET
*****
INPUT UART DRIVER ROUTINE
CHECKS TO SEE VALID CHARACTER
IS TO BE DISPLAYED
A DC1 CONTROL CHARACTER CAUSES
TO EXIT THIS ROUTINE AND GO INTO
TRANSMIT MODE

116- 200 315 CALL
116- 201 0
116- 202 116
116- 203 376 CFI
116- 204 15
116- 205 312 JZ
116- 206 222
116- 207 116
116- 210 376 CFI
116- 211 21
116- 212 310 RZ
116- 213 0 NOP
116- 214 0
116- 215 376 CFI
116- 216 40
116- 217 372 JM
116- 220 200
116- 221 116
116- 222 325 PUSH D
116- 223 375 PUSH IY
116- 224 345
116- 225 315 CALL
116- 226 63
116- 227 0
116- 230 375 POP IY
116- 231 341
116- 232 321 POP D
116- 233 303 JMP
116- 234 200
116- 235 116
*****
READ FROM KEYBOARD OUTPUT UART DRIVER ROUTINE

116- 275 315 CALL
116- 276 53
116- 277 0
116- 300 267 ORA,A
116- 301 312 JNZ

```

Introducing
the one
printer
worth
buying on
reliability
alone.



Epson.

What do you want from a printer for your TRS-80? Speed? Graphics capability? Reliability?

Consider this: of the first several thousand Epson TX-80 printers sold in Europe, less than 1% came back for service. *No one* else can match that record of reliability. And if you own a TRS-80, you can add the remarkable printing capabilities of the TX-80 right now. Today.

We'll give you a full 96 ASCII and 64 graphic characters at the rate of 125 CPS in 80 columns of clean, easy-to-read 5x7 dot matrix. And a

jeweled print head with a life expectancy of 100 x 10⁶ characters. And our optional GRAFTRAX bit plot graphics capability. And one more thing. A very low price. Because we make more printers than anybody, we can afford to sell each one for a little less. So you can have a TX-80 for your very own starting at about \$710.

The TX-80 is the very high quality, very affordable printer you've been waiting for. Wait no longer.

Write to us, and we'll tell you where to get one.

EPSON ✓ 404
EPSON AMERICA, INC.

23844 Hawthorne Boulevard, Torrance, California 90505 • Telephone: (213) 378-2220

subroutine starts at 116-000. This routine serially outputs seven bits in the A register, adding start, stop and parity bits.

Routine B—The input UART routine starts at 116-100. A 7-bit word is read in from the input port and returned in the A register.

Routine C—The input UART program—driver subroutine starts at 116-200. This routine displays received characters on the TV screen of the TRS-80. If the character is a DC1 control character (you might want to change this character for your particular application), this sig-

nifies the end of the transmitted message and a machine language RETURN is executed.

Routine D—The program starting at 116-275 is the entry point from BASIC that puts the TRS-80 into the terminal mode. Whatever you type at the keyboard is displayed on the screen and transmitted serially from the output port. When you type ENTER (i.e., carriage return), the TRS-80 goes into the listen mode (subroutine at 116-200 is executed) and the output is displayed on the screen until a DC1 is received, causing the program to go back into the

transmit mode. If a character is received while transmitting, the program automatically goes into the listen mode. If you type a shift arrow (!), the program will return to BASIC.

Routine E—The routine starting at 116-240 allows Level II systems to use the LList and LPRINT line printer commands to output to the serial output port and to the TV screen. This implementation directs the TRS-80 into the listen mode waiting for a DC1 control character after it transmits a carriage return before it can print the next line. The routine requires that 160 be POKEd into memory at 16442 and 78 at 16443. This sets the line printer driver address (i.e., the program that the line printer commands call) equal to the Routine E starting address.

Modifications

The program listing is used with a Level II, 4K system. Make sure to reserve memory for the program by typing 19967 when asked for the memory size. Also make sure to POKE the starting address of the program in locations 16526 and 16527 decimal (low-order byte in 16526). For Level II 16K systems, the pro-

gram should be relocated to a starting location of 175-000 in order to make use of the extra memory available. Memory size 31999.

For Level I systems you must relocate the program and change the entry points for the keyboard-scan routine and the display to screen. The program must also run under a monitor similar to T-BUG. If you have a Level II system, you can load the machine-language program under BASIC. The instructions in octal can be stored in DATA statements, converted to decimal and then POKEd into memory. Program A illustrates how it is done.

The advantages of serial I/O are many, but the best part is that you do not need extra hardware or parts... only a few for the optoisolator circuit. Also, you only need three lines from the TRS-80 to the external device.

If you need the serial data from the TRS-80 converted into parallel data and the data from the external device converted into serial data, refer to "Build a Serial to Parallel Converter" (November 1978 *Kilobaud*, p. 84). This article describes an easy circuit to do just that. ■

```

5      STORE MACHINE LANGUAGE PROGRAM OCTAL
7      BYTES FROM FIGURE 4 IN DATA STATEMENTS
10     DATA 300,320,345,021,000,333,377,EIC,.....
20     DATA.....

990    NO IS THE NUMBER OF BYTES TO BE STORED
995    MACHINE LANGUAGE PROGRAM IS POKED IN MEMORY
999    START = 16998: START IS ADDRESS TO STORE PROGRAM
1000   FOR I=1 TO NO
1001   READ D:GOSUB 5000:POKE START+I-1,D: NEXT I
1005   POKE STARTING ADDRESS AND
      NEW LINE PRINTER DRIVER ADDRESS
1006   POKE 16526,189:POKE 16527,78:POKE 16442,160
1007   POKE 16443,78
1008   MACHINE LANGUAGE PROGRAM IS NOW ENTERED
1009   Y=USR(0):END
2060   OCTAL TO DECIMAL CONVERSION
5001   D=INT((D/100):D2=INT((D-D1*100)/100)
5002   D3=INT(D-D1*100-D2*10)
5003   D=D1*345+D2*34+D3:RETURN

```

Program A.

```

116-302 315 CHECK TO SEE IF START BIT IS TRANSMITTED
116-303 116 SEE IF KEY IS A SHIFT ARROW
116-304 376 CPI SHIFT ARROW
116-305 33 RETURN TO BASIC IF SHIFT ARROW
116-306 310 R2 CALL OUTPUT A CHAR.
116-307 315 CALL
116-310 323
116-311 116
116-312 303 JMP
116-313 275
116-314 116
116-315 315 CALL
116-316 345
116-317 116
116-318 303 JMP
116-319 275
116-320 116
116-321 0 NOP
116-322 107 MOV B,A
116-323 315 CALL
116-324 100
116-325 116
116-326 325 PUSH D
116-327 375 PUSH Y
116-328 345
116-329 315 CALL
116-330 63
116-331 375
116-332 375
116-333 314 CZ
116-334 375
116-335 375
116-336 375
116-337 341
116-338 321
116-339 375
116-340 375
116-341 375
116-342 15
116-343 314 CZ
116-344 200
116-345 116
116-346 377
116-347 377
116-348 377
116-349 345 ANI
116-350 345
116-351 1
116-352 314 CZ
116-353 200
116-354 116
116-355 311 RET
*****
ROUTINE TO MAKE LPRINT AND LLIST COMMANDS OUTPUT
TO SERIAL OUTPUT PORT AND DISPLAY. THIS IS DONE
BY CHANGING THE DRIVER ADDRESS FOR THE
LINE PRINTER TO 116-240 AND MANIPULATING
THE REGISTER VALUES AND CALLING
VIDEO DISPLAY ROUTINES.
116-240 341 POP D
116-241 341 POP H
116-242 021 LXI D
116-243 035
116-244 100
116-245 325 PUSH D
116-246 345 PUSH H
116-247 335 LXI A,4010H SET IX TO 4010H ALSO
116-250 041
116-251 035
116-252 100
116-253 305 PUSH B
116-254 315 CALL
116-255 130
116-256 004
116-257 301 POP B
116-258 341 POP H
116-259 101 MOV B,C
116-262 037 MOV D,A
116-263 310 CALL
116-264 100
116-265 116
116-266 315 CALL
116-267 341
116-270 116
116-271 403 JMI
116-272 035
116-273 003
*****
CHECK TO SEE IF START BIT IS TRANSMITTED
SEE IF KEY IS A SHIFT ARROW
SHIFT ARROW
RETURN TO BASIC IF SHIFT ARROW
CALL OUTPUT A CHAR.
GO AND READ KEYBOARD AGAIN
CHECK TO SEE IF RECEIVING START BIT
READ KEYBOARD AGAIN
OUT UART
SAVE REGS
TRS80 DISPLAY ROUTINE
DISPLAYS CHAR IN A REG.
CARRIAGE RETURN ROUTINE IF
CALL INPUT UART ROUTINE GO TO LISTEN MODE
CARRIAGE RETURN GO TO LISTEN MODE
CHECK TO SEE IF RECEIVING START BIT
PORT
CHECK BIT DO
IF RECEIVE START BIT GO TO LISTEN MODE
INPUT UART IS CALLED
*****
ROUTINE TO MAKE LPRINT AND LLIST COMMANDS OUTPUT
TO SERIAL OUTPUT PORT AND DISPLAY. THIS IS DONE
BY CHANGING THE DRIVER ADDRESS FOR THE
LINE PRINTER TO 116-240 AND MANIPULATING
THE REGISTER VALUES AND CALLING
VIDEO DISPLAY ROUTINES.
REPLACE DE ON STACK
WITH 4010H, THE VIDEO
DISPLAY BLOCK ADDRESS
PUT DE BACK ON STACK
PUT HL BACK ON STACK
SET IX TO 4010H ALSO
SAVE BC
TRS-80 DISPLAY ROUTINE
DRIVER ADDRESS FOR
VIDEO DISPLAY BLOCK
GET B OFF STACK
CLEAR 0300H OFF STACK, IT IS RETURN ADDRESS
GET REGS, READY FOR OUR UART
OUT UART ROUTINE
ROUTINE CHECKS IF CR TRANSMITTED
GO TO LISTEN MODE AND WAIT FOR CFI IF SO
POP ALL REGISTERS AND RETURN
*****

```

TRS-80* — CONDENSE

The Ultimate in BASIC Compression Utilities

** Release 1.3 Now Available **

- Write BASIC programs using single statement lines for ease of maintenance.
- Write BASIC programs with unlimited remarks and comments to improve program readability and documentation....

— AND STILL GET —

OPTIMUM USE OF MEMORY — FASTER PROGRAM EXECUTION

- Compresses programs up to 70% of original size
- Improves execution time by as much as 30%
- Creates multiple-statement program lines
- Blank compression
- Remark and comment deletion
- Renumbers GOTO, GOSUB, THEN, ELSE, and RESUME statements which reference deleted line numbers
- PLUS THESE NEW USER REQUESTED OPTIONS:
 - Retention of low numbered remark statements
 - Checkpoint / Restart Facilities
 - Phase 1 work file

Model I \$21.95

(Diskette)

Model II \$24.95

(Diskette)

INTERNATIONAL SOFTWARE ASSOCIATES

P.O. Box 14805
Omaha, Ne. 68124

✓187

Tandy Corporation™

MOVING?

Let us know 8 weeks in advance so that you won't miss a single issue of *Kilobaud Microcomputing*. Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly.

- | | |
|---|---|
| <input type="checkbox"/> Address change only | <input type="checkbox"/> Payment enclosed |
| <input type="checkbox"/> Extend subscription | |
| <input type="checkbox"/> Enter new subscription | <input type="checkbox"/> Bill me later |
| <input type="checkbox"/> 1 year \$18.00 | |

If you have no label handy, print OLD address here.

AFFIX LABEL

Name _____

Address _____

City _____ State _____ Zip _____

print NEW address here:

Name _____

Address _____

City _____ State _____ Zip _____

Kilobaud Microcomputing

P.O. Box 397 • Farmingdale NY 11737

The Original "Photo point" Light Pen

ONLY

\$19.95

Why pay \$30.00, \$35.00, \$62.00 for the same results??

Don't be misled by more expensive imitations!

This is the **original Photo point** light pen preferred and supported by some of the leading software sources like, "Quality Software"—"Instant Software"—"Level IV" products and so on. *Just imagine...*

In playing backgammon, (included) when you want to move a man, you just point at where you want to move from, then point at where you want to move to, and your man moves!!! No more fumbling with keyboards—YEA!

Your **Photo Point** package comes complete;

- 1 Photo point light pen (of course)
- Info sheets on how to connect the pen and how to write your own programs **ALL IN BASIC**
- Two apertures
- AND two sensitivity settings
- A cassette tape with 4 informative programs and games
- Ready to connect to your TRS-80 System. (DOS too!)
- Does not void any Radio Shack warranties

Requirements:

- Level II basic
- And a little *imagination!!*

For fast real time programming it is your lowest cost peripheral at \$19.95

Announcing

NEW PEN BASIC by Steve Bjork

Steve is one of the Best Assembly Lang. programmers around, and he has come up with PEN BASIC. This low memory routine will add 10 more commands to Level II such as PENGET which searches the entire screen for the pen and returns a number between 0-1024 in about 1 sec. Plus 9 other commands. Perfect for you lightware authors and **NEW** light pen owners too!only \$14.95

(COUPON)

Micro Matrix ✓68

P.O. Box 938 • Pacifica, CA 94044

Send for yours **NOW: (415) 355-4635**

Name _____ Photopoint
☐ \$19.95

Address _____
 City _____ St. _____ Pen Basic
☐ \$14.95

Zip _____

Card # _____ Money
 Ex. _____ CK. Order Visa MC
 Date _____ ☐ ☐ ☐ ☐

SILVER & BLACK



COMPUTEX

DISK DRIVE SALE

\$275.00

THAT'S RIGHT!!! Throughout the month of August, COMPUTEX will sell a limited number of disk drives with power supply and case for \$275.00. Even better than the price is the fact that you can choose between three of the major disk drive manufacturers, SHUGART : M.P.T. or TANDON. All three drives are fully compatible with the TRS-80* and are guaranteed for 90 days... Double headed drives are available for \$375.00

16 K RAM CHIPS---8⁺, \$54⁹⁵

CABLES FOR DISK DRIVES AND PRINTERS

4 DRIVE CABLE \$29.95
2 DRIVE CABLE \$21.95
CENTRONICS 730 PRINTER CABLE \$21.95
CENTRONICS 779 PRINTER CABLE \$29.95
CENTRONICS 730 PRINTER \$579.95
CENTRONICS 779 PRINTER \$849.95

COMPLETE LNW SYSTEM EXPANSION KIT

Includes all parts and the P.C.B. to build the L.N.W. expansion interface except RAM and the relay for cassette operation.

CUSTOM BUILT CABINET FOR L.N.W. SYSTEM

Custom built and finished cabinet holds up to two disk drives, power supplies and the L.N.W. expansion interface. See above ad for more description on the CPT series.

VERBATIM DISKETTES - BOX of 10

COMPUTEX : 17710 Heritage Court, Webster TX 77598 PHONE (713)-332-4359
VISA / MASTERCARD ORDERS ADD 4% to total.
PERSONAL CHECKS MUST CLEAR PRIOR TO SHIPMENT. C.O.D.'s ACCEPTED WITH 10% DEPOSIT.

✓392

TRS-80TM

Level II 16K TRS-80

\$675⁰⁰

Full warranty at any store.

All accessories 10% off.

5% sales tax for MA.

16K DYNAMIC RAMS

FOR MEMORY EXPANSION

\$49⁹⁵

4% Extra on Shipping

Radio Shack
DEALER



✓400



Post Road Shopping Plaza

Marlboro, Ma 01752

(617) 481-1027

TRS-80[®] MODEL II

Professional Software NOW AVAILABLE!

BASIC CROSS REFERENCE: Prepares a listing of your BASIC program. Heading contains program name, date, time, & page #. All 'REM' statements print ELONGATED & are easy to spot. The cross-reference report is then printed. It shows you at a GLANCE what line #'s within your program are referenced and where, all variable names used & where. Know what is available. Find DEAD spots. We wrote this for ourselves...you can use it too...!

Documentation * \$10.00 Total = \$59.99 **

DISK SORT: Sorts thousands of 'random file' records. Capacity is dependent on your disk space. Answer the question and sort now or later in your job stream. 1000 records @ 20 bytes, sorting 16 bytes = 2.26 min! Input files are not clobbered by the sort. All stored specs. can be displayed, printed or changed.

Single or multiple drives and 64K required.

Documentation * \$10.00 Total = \$69.99 **

INVENTORY FLOORING MANAGEMENT. Send for details.

BASIC COMPILER, TRSDOS[®]/BASIC compat. Faster by 7-30 times! Written by Microsoft. (Augmented with our documentation).

Easy to use! Complete package: \$350.00 **

Use our Compiling Service to try it out. Send for details. We use it and have found it to be absolutely FANTASTIC!

ANADIX PRINTERS: DP-9501 \$1,599.00 Delivered! (48 contiguous states only)

2K buf., graphics, 10-167 cpi, 11x9 matrix, all three interfaces, & much more. A FANTASTIC printer/price! **WORD PROCESSING:** Complete editing capability including center, right, left, or full line justification, tabs, margin, length and width control. Lines automatically overflow from line to line. All file specifications stored on disk. A complete, sophisticated system.

Requires 64K & printer of your choice.

Documentation * \$10.00 Total = \$299.00 **

*Deductible on software purchases.

** Plus postage & handling.

(All software is in machine language or extra high speed)

Send for documentation & order form.

GOOD-LYDDON Data Systems

5486 Riverside Dr., Chino, CA 91710 ✓218

'TRS-80[®]' & 'TRSDOS[®]' are registered trademarks of Tandy Corp.

Master Charge or Visa accepted.

NEW! TRS-80[®] EXPANSION INTERFACE FROM COMPUTEX

Designed and built by COMPUTEX, the CPT series of expansion interfaces will make your TRS-80* perform and look like a computer system should.

The custom built all wood cabinet trimmed in aluminum features a removable front panel with or without cutouts for disk drives. This allows you to start with just the basic system, then for only \$275 you can add a disk drive and new front panel. The cabinet height places the disk drives only inches from the front of your keyboard which makes disk drives much easier to access. Innovative design has made the addition of disk drives a simple job of sliding in the disk drive, inserting four screws then connecting two connectors to the drive. We also included in the cabinet design the muffin fan that everyone else left out.

The actual interface electronics is composed of the field proven LNW system expansion board which includes all of the capabilities of the Radio Shack Interface, plus a RS232/20-A Serial Port.

Best of all, the entire system can be purchased in kit form or assembled at a fraction of the cost of other systems. For example a complete system with two double headed drives, RS232 and 32K RAM is only \$1350. A four drive system as above would be nearly twice that amount from any other supplier.

A thousand words cannot describe the new CPT series of interfaces so see our ad below then write or call for more information.

COMPLETE LNW INTERFACE KIT\$249.95
CUSTOM BUILT & FINISHED CABINET.....\$ 99.95
FRONT PANELS, SPECIFY, 0, 1 or 2 CUTOUTS.....\$ 19.95
DUAL DISK POWER SUPPLY.....\$ 59.95
MUFFIN FAN.....\$ 14.95
TANDON 40 TRACK DRIVE.....\$255.00
TANDON DOUBLE HEADED DRIVE.....\$355.00

COMPUTEX : 17710 Heritage Court, Webster, TX 77598 (713)332-4359

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

** SPECIAL ** SPECIAL ** TRS-80 ADD ON DRIVES IMMEDIATE DELIVERY

SINGLE SIDED \$225.00
DOUBLE SIDED \$345.00

COMPLETE SYSTEMS

SINGLE SIDED \$365.00
DOUBLE SIDED \$485.00

INCLUDES:

MINI DISK DRIVE
FUSED POWER SUPPLY
VENTED CABINET
CABLE
90 DAY WARRANTY
FACTORY ASSEMBLED
FACTORY TESTED

THESE ARE NEW 5" FD's

2 INTERFACE, INC ✓246
20932 CANTARA ST
CANOGA PARK, CA 91304
(213) 341-7914



VISA AND MASTER CHARGE ACCEPTED

● MISOSYS ●

>disk*mod Turn your Editor Assembler into a disk package. This patch modifies EDTASM 1.1 & 1.2 under TRSDOS, NEWDOS, or VTOS! Features? Add full disk I/O, block move, global change, printer pagination with optional prompting, sorted symbol table, print memory utilization, correct DEFM expansion, protect memory, and recover after BOOT. From within the EDTASM you will have DIR, KILL, & FREE. This package is a must for assembler programmers! Priced at \$20.

DISK*MOD and DSMBLR II require a 32K disk system.


>dsmbler II Complement your assembly language tools with this Z80 disassembler which produces screen, printer, or disk file output. A 2-pass process provides SYMBOLS for 16-bit address and 8-bit relative references. EQUATES & ORG are generated. Priced at \$20. A 16K Tape Version (DSMBLR 1.2) is available for \$15.

>cmdfile Now you can append 2 or more CMD files and/or SYSTEM tapes. Perform transfer to & from disk/tape of SYSTEM/CMD modules with offset capabilities. Provides PATCH, TAPEDISK, & LMOFFSET capabilities as well as adds a few of its own. Get CMDFILE today! 16K req'd. \$20.

MISOSYS Department K ✓221
5904 Edgehill Drive
Alexandria, Va. 22303
703-960-2998

MASTER CHARGE & VISA Accepted

A Sophisticated Model II Editor Assembler is now available. Contact MISOSYS or Galactic Software Ltd.

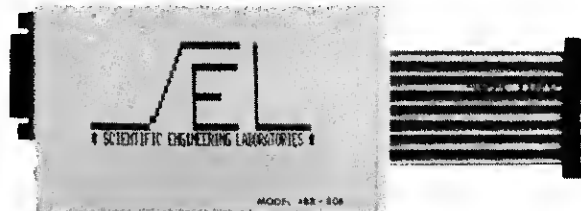

GPIB-488 to TRS-80* INTERFACE

Mod. 488-80B

\$225.00

+ shipping, insurance & tax

**SPECIFY
DISK OR TAPE**


Everything needed to add **powerful controller capability** to TRS-80, Model 1, Level 2 or DOS

SCIENTIFIC ENGINEERING LABORATORIES ✓ 291

11 NEIL DRIVE • OLD BETHPAGE, NEW YORK 11804

TELEPHONE (516) 694-3205

*Trade Mark of Tandy Corp.
There is no affiliation between
Scientific Engineering Laboratories
and Tandy Corporation or Radio
Shack.



OUR MONKS HAVE A SPECIAL INTRODUCTORY OFFER FOR 16K LEVEL II USERS

**7 GAMES-\$10.00
CASSETTE AND INSTRUCTIONS**

- * MISSILES- Destroy Video Bombers
- * TANK TRAP- Destroy The Enemy-Save Your Tank
- * STAR TREK- Another Trek, Another Game
- * DICE GAME- Gambling Game For 1 To 4 Players
- * CONNECT 4- Two Players, Or You Against It
- * STAR FIGHTERS- Destroy Robot Fighter's Mother Ship
- * DIGIT MASTER MIND- Deductive Logic, 8-Levels Of Play

BRITT MONK, CDP
P.O. BOX 802 ✓ 324
ELYRIA, OHIO 44036

TRS-80*

SAVE A BUNDLE

When you buy your
TRS-80™ equipment!


Use our toll free number to
check our price before you buy
a TRS-80™ . . . anywhere!

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

full RadioShack warranty



SALES COMPANY ✓ 148
1412 WEST FAIRFIELD DR.
P.O. BOX 8098 PENSACOLA FL 32506
904/438-8507
nationwide 1-800-974-1561











RONDURE COMPANY

✓ 191

2522 BUTLER ST
DALLAS, TEXAS 75235
214-630-4621

the computer room

<h3>SPECIAL Printer for your Microcomputer</h3>  <p>GE TERMINET 300 PRINTER</p> <p>Pin feed—9" paper</p> <ul style="list-style-type: none"> • 80 Print positions • Receive only • ASCII code • RS-232 interface • 30 CPS • Upper & lowercase • Shipping wt. 75# <p>Shipping containers \$15.00. (used) (good working condition)</p> <p>Will run on serial RS232 port of most micros including TRS-80. \$450.00</p>	<h3>WE HAVE FLAT-PACK ACOUSTIC</h3>  <p style="text-align: right;"><i>Modem pickup</i></p> <p style="text-align: right; font-size: 1.5em;">\$19⁵⁰</p>	<h3>USED FANS</h3>  <p style="text-align: right;">Muffin — 8.00 Sprite — 4.00</p>
 <h3>NEW POWER SUPPLY (AC-DC Brand)</h3> <p>Model 1-22V @ 1.9a \$20.00 Model 2-15V @ 2.4a \$30.00</p>	 <h3>NEW POWER SUPPLY</h3> <p>\$25.00</p> <p>5V at 3 Amp 12V at 6 Amp -12V at 3 Amp</p>	 <h3>USED POWER SUPPLY</h3> <p>\$15.00</p> <p>5V at 12 Amp 16V at 6 Amp 6V at 2 Amp</p>
 <h3>MICRO SWITCH KEYBOARD USED BUT LOOKS VERY NICE</h3> <p>ASC II \$40.00 (With Print)</p>	 <h3>USED OMNITEK</h3> <p>MODEM ORIGINATE ONLY TESTED</p> <p>\$90.00 Sale</p>	

ORDERING INFORMATION:
We ship the same day we receive a certified check or money order.
Texas residents add 5% sales tax. Please call if you have a question.
Write for our CATALOG of many parts, terminals, printers, etc.
All items subject to availability. Your money returned if we are
out of stock.

SHIPPING INFORMATION:
Modems: \$3.00 each; Key Boards \$4.00. Power Supply \$7.00.
Large Items & Parts: Specify Freight or Air Freight Collect.
Foreign Orders: Add appropriate freight or postage.
We now take Master Charge and Visa orders. Specify full number,
bank number and expiration date.

The next logical step.

Towards Machine Language

Allan S. Joffe W3KBM
1005 Twining Road
Dresher, PA 19025

Sooner or later you will have had your TRS-80 long enough to feel comfortable with BASIC. When this plateau is reached, the urge to explore machine language is not too far behind.

If you take a look at the instruction set for the Z-80, you might decide that BASIC is better than ever. Still, you know that machine language is fast and the mastery of some of its mysteries has got to make you a more complete programmer.

What You'll Need

Before you tread the maze of this new discipline, face the fact that hexadecimal is a necessity and learn or relearn it. You'll need a monitor program, which allows you to communicate with your computer at its gut level. There are a number of different monitors around, my own choice being T-BUG by Radio Shack. It's both flexible and easy to use.

Also you'll need a guide book that gives you machine language fundamentals. I can recommend *TRS-80 Assembly-Language Programming* by William Barden, Jr. for its clarity.

If you can possibly get hold of the Z-80 instruction manual by Zilog you will have a much more informative map of the instruc-

tion set.

Your window to the world of the TRS-80 innards is going to be memory locations 3C00 to 3FFF, the video memory.

I'm going to assume that you have bought a copy of T-BUG and the Barden book. One of its sample programs on page 77 takes a character, loads it into a register and makes the character appear in the center of your monitor.

4A00	3E31
4A02	32203E
4A05	C3054A

To RUN this program you would execute a J4A00.

This program works like a charm and locks itself tightly into a loop that can only be broken by RESET.

The problem is in the third line, a LOOP instruction. We can make a simple change, 4A05 C38043, which will make the program run as before, but will return to the start of T-BUG. This avoids your having to use the RESET button and go through the T-BUG entry routine each time you run a change.

To phrase a computer happening in Capitol Hill overtones, the C3 instruction in memory location 4A05 is "the moral equivalent of a BASIC GOTO command".

BASIC Parallels

If you wrote in BASIC, 10 GOTO 10, you would have created a parallel situation,

namely a loop. The same is true for any number of machine language codes. Thus C9 is a RETURN, C3 is a JP NN where JP stands for JUMP (or GOTO) and the NN represents the address to be JUMPed to in hex notation.

Let's go back to the little program and examine certain notation conventions and peculiarities that can give the machine language tyro a case of the "undecideds."

Taking one memory cell at a time 4A00 3E is an LD A,N instruction which can be read: Load the A register with N, N being a hex value for the desired character, in this case 31H which will produce the numeral 1 on the screen.

Notice that while we are only delineating the memory cell value for the first entry, that by convention it is understood that 4A00 3E 31 is placing the 3E in memory location 4A00 and that memory location 4A01 gets the value of 31 placed into it. This saves writing many location numbers, if indeed, you know what is being done. This may sound simple, but I have yet to see the person born with the proverbial silver spoon of machine language in his or her mouth.

If you wanted the letter A instead of the numeral 1, you would substitute 41H and the character on the screen becomes an A.

4A02 32 20 3E now begins to make a bit more visual sense

when you realize that these items represent the contents of the next three memory cells in the program.

The contents of memory location 4A02 is a 32 instruction—LD(NN),A—that can be read: LOAD location in memory specified by NN with the contents of the A register. Now we have to specify into what memory locations the information in the A register is to go.

The program defines this location as 20 3E, which brings up a bit of a sore point. Your TRS-80 window to the world is the part of memory dedicated to lighting the monitor screen. This runs from 3C00H to 3FFFFH. You have guessed that 203E must fall within this window, but something does not look right.

If you remember that the lowest part of the address goes in first and the highest part of the address goes in last, then mentally you can turn 203E into 3E20, which is how the computer visualizes it.

When you do this, a little calculation will show you that 3E20 is just about in the middle of the window range of 3C00H to 3FFFFH. The decimal value of 3C00H is 15360 and the decimal value of 3FFFFH is 16383.

4A05 C3 8043 starts to make a bit more sense. The C3 JUMP instruction is followed by the address to jump to and once more we see the last first, first last, reversal of the address. The real address is 4380, which is the start of T-BUG.

F3 42 These are the program "pointers."
 0A 00 This is the line number in hex which is entered in last-first, first-last style. In actual human terms it is 000A which translates to 10.
 B2 This is the compact code used for all of the TRS-80 reserved words. They are all 80H and higher. B2 is PRINT, 80 is END, 81 is FOR... etc.
 20 This is the ASCII code for the space between the T in PRINT and the " preceding the X.
 22 This is the ASCII code for the " preceding X.
 58 This is the ASCII code for the letter X
 22 This is the ASCII code for the closing " after X

Example 1.

Now if you run this program and execute a J4A00 using T-BUG, everything rolls up off the screen, and you are left with a clean display with a numeral 1 in the center of the screen and the # sign in the upper left hand corner, indicating T-BUG is standing by, ready to execute your orders.

Using T-BUG

You can go from T-BUG back to BASIC with a J 1A19, which will bring up the READY that you are used to seeing when BASIC is hot to trot. Remember this fact of life. When you write a BASIC program in the usual fashion, the first memory location that this program uses is 42E9H or 17129 decimal.

T-BUG starts at 4380H or 17280 decimal, so if T-BUG is in residence you don't have many memory locations between the start of BASIC and the point where a BASIC program would be busy wiping out the T-BUG program.

It would have been nice, if the folks who created T-BUG would also have rewritten a version that resided in high memory. This would free RAM in low memory for BASIC programming.

Another small housekeeping hint when clearing a screen full of data. You have at least two options. You can execute a J 4380 or a J 40A4 with T-BUG, either of which will clean up the screen leaving you with the # sign in the upper left hand corner.

Before going on to another machine language program let us examine a line of BASIC programming using T-BUG, which may provide you with some answers and certainly raise many more questions about this

new vista of machine language.

Assume that you have loaded T-BUG into your TRS-80 and then have executed a J1A19 that gets you back to BASIC. Clear the screen, and type in this line: 10 PRINT "X". Now return to T-BUG, and using the M command, we find the items in memory locations 42E9 to 42F1 inclusive in Example 1.

Machine Code LISTING

There is a world of information to be learned on just how and in what form your TRS-80 does its thing. It's annoying that Tandy Corporation makes it so hard to come by this information. It is tough to figure why any information that makes a product easier to use by its purchaser is so cloaked in proprietary secrecy.

Using T-BUG, punch in this series of commands starting at memory location 5000: CD # F6 F6 04 3E 31 32 20 3E 76.

Now jump to J 5000. Interesting, isn't it?

All of the information on the screen is in the large print format. What you have done is call an instruction in the ROM, which is located at memory location 04F6, and, presto, you have a very handy routine. There are literally hundreds of these "instant" machine language routines locked away in your Level II ROM. All you need to know is their starting address and their functions.

To help your programming make up a card that shows you which CPU register is which, when you use the R command of T-BUG to display the contents of these registers. It will make life simpler

Block Transfer

Let's examine one of four very

FREE

SHIPPING ANYWHERE IN THE CONT. U.S.

CENTRONICS PRINTERS

730-1



THE BEST AND MOST POPULAR SMALL SYSTEM PRINTER

7x7 parallel matrix • upper & lower case
 • excellent print quality • 80 char./line
 • avg. 30 lines/min. • same as Radio Shack Line Printer II

Our Price \$774 List \$970 You Save \$196

779-1

Same as Radio Shack Line Printer I

Our Price \$1,095 List \$1,570 You Save \$475

THE 700 SERIES - 132 COLUMN PARALLEL PRINTERS

Model	Avg. lines Per Min.	Dot Matrix	OUR PRICE	List	YOU SAVE
700-9	40	9x7	\$1,395	\$1,930	\$535
701-9	70	9x7	\$1,645	2,015	370
702-9	140	9x9	\$2,155	2,490	335
703-9	200	9x9	\$2,685	3,190	505

TRS-80* EQUIPMENT

EQUIPMENT

LIST OUR PRICE

Level I - 4K System	\$499	\$459
Level I - 16K System	\$729	\$679
Level II - 4K System	\$619	\$579
Level II - 4K w/Key pad	\$698	\$648
Level II - 16K System	\$770	\$710
Level II - 16K w/Key pad	\$849	\$779
Level II - 16K lower case	\$949	\$869
OK Expansion	\$299	\$284
16K Expansion	\$448	\$408
32K Expansion	\$597	\$537

HOW TO ORDER

- Write the products you wish to order
- Mass. Residents Add 5% Sales Tax
- Write your name, ship-to address, and your PHONE NUMBER (someone must be at the shipping address during the day. If no one is home, have it shipped to where you work).
- Send your order and personal, company or certified check or money order to:

SLECTRONICS ✓ 402

205 Lewis St. Lynn, Mass. 01902
 (617) 272-8588 Sorry - NO Phone Orders
 Allow 2 to 6 weeks for delivery

*TRS-80 is a Trademark of Radio Shack & Tandy Corp.

DEBUG-S/S FOR YOUR TRS-80*



AT LAST!! A POWERFUL DEBUG MONITOR FOR THE EXPERT & NOVICE PROGRAMMERS

DEBUG-S/S is a uniquely powerful monitor for: (1) analyzing, (2) creating or modifying, and (3) debugging machine-language programs on your level II, 16K system.

EFFICIENT — SIMPLE — FUN

No longer do you need to keep reaching for your reference card or searching through your program listing while debugging your program. — Most all of this information is at your fingertips with DEBUG-S/S. Warning - Debugging your program with DEBUG-S/S is so efficient and convenient that you may find yourself wishing that you had more bugs to find.

RUN IN SLOW MOTION

With DEBUG-S/S you may run your program in slow motion or single step and observe your Z-80* registers dynamically and/or observe your message printing on the screen one-character-at-a-time!

SPLIT/SCREEN DISPLAY

DEBUG-S/S uses a convenient split screen display system. The upper right section of the screen automatically displays upon entry to DEBUG-S/S from the user's program. This section shows the user's next instruction in hexadecimal and disassembled symbolic form, and also shows the user's major Z-80* registers. The left portion of the screen is for the user's display or a scratch pad area for memory dumps. The lower right section of the screen is where DEBUG-S/S commands are entered and echoed for the user's inputs.

TRANSPARENT MODE

DEBUG-S/S may be operated in a transparent mode which leaves the entire screen showing all of the user's display data upon entry to DEBUG-S/S, except for the letter D displayed on the upper right corner of the screen indicating that DEBUG-S/S has been entered. If the user now wishes to examine his Z-80* registers, he simply types D (Display).

"NO CRASH" BREAKPOINTS

DEBUG-S/S uses a single byte breakpoint which means you may put a breakpoint in the first byte of any instruction in your program and not cause your program to crash because of the breakpoint insertion. Your breakpoint will stay active until you reset it or redefine it. This allows you to run through loops in your program repeatedly without having to redefine your breakpoint each time. You may enter any number of one byte pseudo breakpoints simultaneously in your program manually with the Memory command.

POWERFUL COMMANDS

Examples of DEBUG-S/S commands are: Jump - Go - Breakpoint - Memory examine/modify - Hex Dump - ASCII Dump - Symbolic Instruction Dump - Single Step - Automatic Step start/stop - Increase/Decrease Auto Step rate - Clear Screen and save cursor position - Clear Screen and home cursor position, plus other commands.

YOU WILL RECEIVE

You will receive a cassette and instruction manual. DEBUG-S/S is assembled into lower memory on one side of the cassette and into the top of 16K memory on the other side. DEBUG-S/S uses 4K of RAM.

*TRS-80 is a trademark of the Tandy Corporation. *Z-80 is a trademark of Zilog.

Send check or money order payable to:

CALSOFT
4421 Gilbert St. #303
Oakland, CA 94611

\$39⁹⁵

California Residents add 6.5% Sales Tax.
(PRINT)

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

D9	ABS	A4	GET	A1	ON	BF	USING
D2	AND	91	GOSUB	A2	OPEN	C1	USR
E4	ATN						
		8F	IF	E5	PEEK	F5	VAL
F1	CDBL	C9	INKEY\$	C6	POINT	C0	VARPTR
F7	CHR\$	DB	INP	B1	POKE		
EF	CINT	89	INPUT	DC	POS		
B8	CLEAR	C5	INSTR	B2	PRINT		
A6	CLOSE	D8	INT	A5	PUT		
84	CLS						
85	CMD	AA	KILL	86	RANDOM		
B3	CONT			8B	READ		
E1	COS	F8	LEFT\$	93	REM		
F0	CSNG	8C	LET	82	RESET		
E8	CVD	AB	LSET	90	RESTORE		
E6	CVI	F3	LEN	9F	RESUME		
E7	CVS	9C	LINE	92	RETURN		
		B4	LIST	F9	RIGHT\$		
88	DATA	A7	LOAD	DE	RND		
9B	DEFDBL	EA	LOC				
		EB	LOF	AD	SAVE		
99	DEFINT	DF	LOG	83	SET		
9A	DEFSNG			D7	SGN		
		C8	MEM	E2	SIN		
98	DEFSTR	A8	MERGE	DD	SQR		
B6	DELETE	FA	MID\$	CC	STEP		
8A	DIM	EE	MKD\$	94	STOP		
		EC	MK\$	C4	STRING\$		
90	EDIT	ED	MK\$				
95	ELSE			BC	TAB		
80	END	A9	NAME	E3	TAN		
C2	ERL	BB	NEW	CA	THEN		
C3	ERR	87	NEXT	C7	TIME\$		
94	ERROR	CB	NOT	97	TROFF		
E0	EXP			96	TRON		
A3	FIELD						
F2	FIX						
B1	FOR						
DA	FRE						

Table 1. Codes for List of Reserved Words in Level II Manual.

nice Z-80 processor commands that come under the general heading of block transfer, a series of commands that move existing information in one part of memory to another quickly and easily.

Let's look at LDIR. Think of it as Load, Increment and Repeat. Three sets of registers have to be initialized. The instruction must know where the data is in memory that you want moved; to where you want it transferred; and, finally, just how many bytes of data are to be transferred.

The HL registers, used as a coupled pair, are loaded with the starting address of WHERE THE DATA IS COMING FROM (source).

The DE registers, used as a coupled pair, are loaded with the starting address of WHERE THE DATA IS TO GO (destination).

The BC registers, used as a coupled pair, is loaded with a hex value that gives the total byte count that you want to move.

Here is a simple demonstra-

tion program of the LDIR command.

Starting with memory location 5000, load the following:

```
11 20 3E 21 00 60 01 0C 00 ED B0
```

Let's examine what this series of memory contents is to do.

- 11 loads the DE register pair with the hex values 203E. This address is in the middle of the video memory window.

- 21 loads the HL register pair with the hex value of the address where the information is stored. In this case the value is 00 60, which, in human terms, is 6000.

- 01 loads the BC register pair with the value 0C00 which translates to 000CH or 12 in decimal. This is the total number of bytes we are going to transfer.

The final two bits of information, namely EDB0, are machine code for "execute the block transfer, please." Now, all we

have to do is put the planned 12 bytes of data into the memory location we have designated, which starts at location 6000H.

Again using T-BUG, load the following memory information starting at 6000H.

44 41 4E 20 49 53 20 53 4D 41 52 54 C3 80 43

This simple message reads: DAN IS SMART and appears in the middle of your screen when you execute a J5000. All the values with the exception of the last three (C3 80 43) are ASCII values that represent the letters making up the message. The numeral 20 is the ASCII code for a space.

The C3 80 43 is the command that sends the program back to the start of T-BUG after running the program. In this manner you are ready to re-program, if you wish, without having to break out of a loop which you might need to hold the message on the screen.

Conclusion

Naturally, you are not limited to alphanumeric here. The graphics character set corresponds to ASCII codes 81 through BF (hex, naturally), so if you replace the 12 bytes in the 6000 section of memory with any of the ASCII graphics symbol codes, you will see them displayed on your screen.

When you get ambitious, you will want to move many more than 12 bytes, but if the move is into the video memory window don't "over-byte" outside the window limits or you will find your computer doing strange things. You will have transgressed into dedicated memory areas.

Machine language is worthwhile, if, for no other reason, than to learn to admire all the people who worked so hard to develop it. If you are interested in speedy graphics, then it is a must. Just remember to be logical and not paint yourself into a corner. ■

IF YOUR CUSTOMER MAILING LIST HAS YOU NAILED...

behind a desk for hours at a time because of constant updates and changes, dial (617) 373-1599 and we'll explain our Customer

Control Mail List System that has 670 customers per diskette; will store name and address information, reference code, plus variable selection codes for each customer; will display customer information of a video screen, print reports and mailing labels; will sort 670 names in less than 30 seconds; select, sort, and print 670 mailing labels in just over 30 minutes; has Partial Key Lookup and instantaneous display; has select/sort options by record sequence, last name, city, state, zip code or reference code; **and has a low price of only \$99.00!**

S&M SYSTEMS, INC.

P.O. Box 1225 • 2 Washington Street
Haverhill, Massachusetts 01830



TRS-80™ SOFTWARE

PACKER: Automatically edits all or part of your Basic program to ease editing, run faster, or save memory. Has 5 sections: UNPACK—unpacks multiple statement lines into single statements maintaining program logic; inserts spaces and rennumbers lines for easier editing. SHORT—shortens your program by editing out all REM statements, unnecessary words and spaces. PACK—executes UNPACK and SHORT, then packs lines into multiple statement lines; maintains program logic. RENUM—rennumbers program lines including all GOTO's, etc. You specify increment. MOVE—moves any line or block of lines to any new location in the program and rennumbers lines. Written in machine language; supplied on tape in 3 versions for 16K, 32K, & 48K. For Level II or Disk Basic. **\$29.95**

DISASSEMBLER: Read, write, and copy system tapes. Display and modify memory contents. Disassemble ROM, DOS, and system tapes into 2-80 mnemonics. Search for strings in memory. Much more!! Includes 32 pages of documentation and information. **\$19.95**

For 16K Level II **\$19.95**
SYSTEM TAPE DUPLICATOR: Copy your system format tapes. Includes verify routine. **\$14.95**

For any Level II **\$14.95**
CHESDISK: Transfers your copy of Microchess to disk for quick and easy access. **\$8.95**

For any Level II Disk system **\$8.95**
CASSETTE LABEL MAKER: A mini-word processor to print cassette labels on a line printer. Includes manual and 50 peel-and-stick labels on tractor feed paper. **\$15.95**

For 16K Level II and printer **\$15.95**
INSTRUCTION MANUALS for any Cottage Software original programs available for 20% of program list price. Refundable when program purchased.

TRS-80™ repairs and modifications. Call or write for info. MANY MORE items available. Call or write for catalog. DEALER inquiries invited.

Kansas residents add 3% sales tax. Foreign orders in US Currency only.

Call our 24-hour phone: 316-683-4811 or write

"TRS-80 is a registered trademark of TANDY CORP."

COTTAGE SOFTWARE

614 N. Harding ✓ 233
Wichita, KS 67208

DR. HOWE'S SOFTWARE

For the TRS-80 (*)

MACHINE LANGUAGE SOFTWARE

MONITOR #3:.....\$39.95
Disassembler; memory displays; memory move, search verify, and modify; read and write object tapes; hexadecimal arithmetic; object code relocater; unload programs for disk; symbolic output tapes; 41-page instruction manual.

MONITOR #4:.....\$49.95
Same as Monitor #3 but adds: save and read disk files; direct input and output of disk sectors; send, receive, or talk to another computer via RS-232-C interface; symbolic disassembly on disk.

SMART TERMINAL:.....\$49.95
Enables your TRS-80 to be used as a remote terminal to a time-sharing system. Supports lowercase and full range of control keys. Automatic transmission between memory and host computer. Much more.

FASTSORT:.....\$9.95
Machine-language sorting program for use by Basic programs. Many times faster than other methods!

GAME OF "LIFE":.....\$5.95
John Conway's game of "Life" shows patterns evolving and changing swiftly before your eyes. A dazzling demonstration program!

BASIC SOFTWARE

MAILING LIST:.....\$69.95
Maintains mailing list files of over 1000 names per diskette. Add, delete, change, find name, machine language sort, print file.

SMALL BUSINESS ACCOUNTING:.....\$49.95
Based on Dome Bookkeeping Journal #612, keeps track of income, expenditures, and payroll for a small business of up to 16 employees. Daily, monthly, year-to-date summaries.

HOME BUDGET:.....\$49.95
Checkbook maintenance combined with records of income and monthly bills. Monthly and year-to-date summaries showing tax deductions.

DATABASE MANAGEMENT:.....\$29.95
Define files of any description and maintain on cassette or disk. Add, change, delete, find, sort, justify, print, line print, total fields, write.

HOWE SOFTWARE

✓ 103

14 Lexington Road
New City, New York 10956

(*) TRS-80 is a registered trademark of Tandy corp.

"HISPED"

TAPE OPERATION

2K Baud PLUS
for the TRS-80™

- Save, verify and load programs up to 4 times faster than normal
- Save, verify and load array data up to 30 times faster than PRINT#
- User variable hardcopy formatting (3 output routines work with most printers)
- "HISPED" is a machine language program (not a hardware add-on)
- 2 copies plus a free basic test program supplied on high quality cassette—for level 2, 16K, 32K or 48K.

Write for full specifications or send \$24.95 (ck or mo) + \$1.00 P/H (Calif. residents add 6% sales tax)

24 Hour Ordering Line (415) 366-5340

PALOMAR SOFTWARE

VISA



170 S. Palomar Dr.
Redwood City, Ca. 94062

✓ 228

"TRS-80 is a registered trademark of TANDY CORP."

Rites of Passage

[illegible]

We are extremely pleased with the Model II. There are only a few negative things that

the electric pencil IITM

©1980 Michael Shrayner

for the TRS-80 Model II* Computer



The Electric Pencil is a Character Oriented Word Processing System. This means that text is entered as a continuous string of characters and is manipulated as such. This allows the user enormous freedom and ease in the movement and handling of text. Since lines are not delineated, any number of characters, words, lines or paragraphs may be inserted or deleted anywhere in the text. The entirety of the text shifts and opens up or closes as needed in full view of the user. Carriage returns as well as word hyphenation are not required since each line of text is formatted automatically.

As text is typed and the end of a screen line is reached, a partially completed word is shifted to the beginning of the following line. Whenever text is inserted or deleted, existing text is pushed down or pulled up in a wrap around fashion. Everything appears on the video display screen as it occurs thereby eliminating any guesswork. Text may be reviewed at will by variable speed or page-at-a-time scrolling both in the forward and reverse directions. By using the search or the search and replace function, any string of characters may be located and/or replaced with any other string of characters as desired. Specific sets of characters within encoded strings may also be located.

When text is printed, The Electric Pencil automatically inserts carriage returns where they are needed. Numerous combinations of Line Length, Page Length, Character Spacing, Line Spacing and Page Spacing allow for any form to be handled. Right justification gives right-hand margins that are even. Pages may be numbered as well as titled.

the electric pencil

—a Proven Word Processing System

The TRSDOS versions of The Electric Pencil II are our best ever! You can now type as fast as you like without losing any characters. New TRSDOS features include word left, word right, word delete, bottom of page numbering as well as extended cursor controls for greater user flexibility. BASIC files may also be written and simply edited without additional software.


Our CP/M versions are the same as we have been distributing for several years and allow the CP/M user to edit CP/M files with the addition of our CONVERT utility for an additional \$35.00. CONVERT is not required if only quick and easy word processing is required. A keyboard buffer permits fast typing without character loss.

	CP/M	TRSDOS
Serial Diablo, NEC, Qume	\$ 300.00	\$ 350.00
All other printers	\$ 275.00	\$ 325.00

The Electric Pencil I is still available for TRS-80 Model I users. Although not as sophisticated as Electric Pencil II, it is still an extremely easy to use and powerful word processing system. The software has been designed to be used with both Level I (16K system) and Level II models of the TRS-80. Two versions, one for use with cassette, and one for use with disk, are available on cassette. The TRS-80 disk version is easily transferred to disk and is fully interactive with the READ, WRITE, DIR, and KILL routines of TRSDOS.

TRC	Cassette	\$ 100.00
TRD	Disk	\$ 150.00

✓ 255

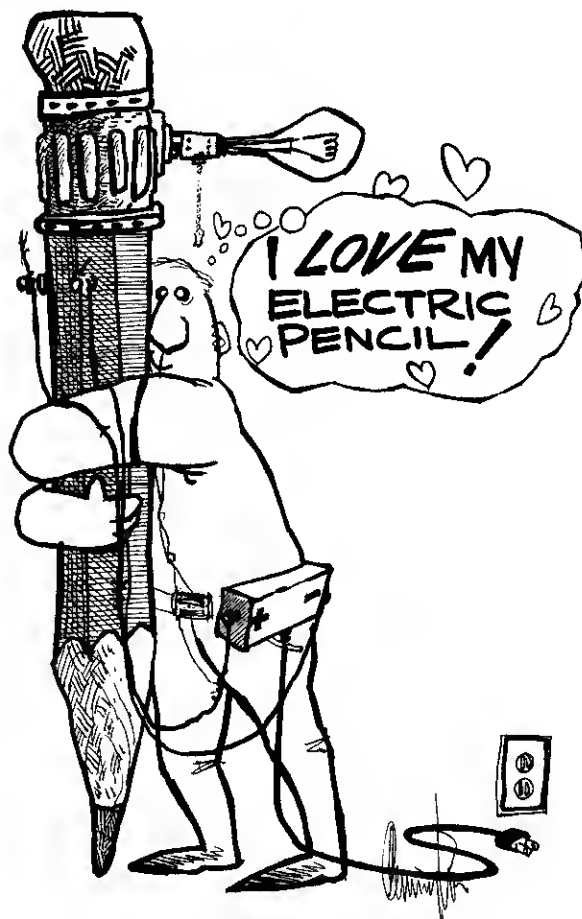

Features

TRSDOS or CP/M Compatible * Supports Four Disk Drives * Dynamic Print Formatting * Diablo, NEC & Qume Print Packages * Multi-Column Printing * Print Value Chaining * Page-at-a-time Scrolling * Bidirectional Multispeed Scrolling * Subsystem with Print Value Scoreboard * Automatic Word & Record Number Tally * Global Search & Replace * Full Margin Control * End of Page Control * Non Printing Text Commenting * Line & Paragraph Indentation * Centering * Underlining * Boldface



*TRS-80 is a registered trade mark of Radio Shack, a division of Tandy Corp.



MICHAEL SHRAYNER SOFTWARE, INC.
1198 Los Robles Dr.
Palm Springs, CA. 92262
(714) 323-1400

deserve comment.

The initialization seems a bit long. On top of that, every time you reboot you have to re-type a lot of information (BASIC, number of files, time, date, etc.); and only time will accept ENTER as a default. This is really aggravating to the person who is writing or debugging a program by line and must Ping-Pong between DOS and BASIC or reboot frequently.

A big fat reset button is located precariously close to the keyboard—just asking for trouble. And since there appears to be no way to restore your BASIC program (BASIC * is not supported), there is constant fear of

losing the current version of a program. You must SAVE frequently—even when you've made the smallest of modifications.

There are some good, detailed graphic characters, but we wish Tandy could have incorporated more.

There is no cassette hookup, only disk.

After paying several thousand dollars, we think the operator is entitled to a few words when the machine runs into an error. But not Tandy: It's back to the manual to find error codes again, just like Level II before DOS.

We miss the clear key. If

you've ever written a game using string packing techniques (like Android Nim), you know what a mess it is to list on screen because control characters within the packed string cause scrolling, carriage returns and the like. The clear button was handy for this application allowing you to list several lines at a time without overprinting previously listed lines, giving you a screen full of unintelligible characters.

Conclusion

This is a well-designed, slightly heavy unit. The keyboard disconnects from the main section via a small cable. The system is more portable than Model I

since everything is housed in one cabinet, except for the keyboard.

The keyboard is comfortable to the touch and it responds very quickly.

Radio Shack must have been in a hurry to get their machine on the market because shortly after its appearance there was already a new version of DOS (1.2). Along with the disk came a thick stack of pages to be added to the loose-leaf owner's manual. About 90% of these pages were for the utility section.

The Model II is a well-priced machine, capable of all that Radio Shack claims. We highly recommend it. ■

BUSINESS/ACCOUNTING SOFTWARE

Flexible client write-up/general ledger system designed by a CPA and developed by a computer specialist for CPA's, accountants and general businessmen provides large-scale computer features at micro-computer software costs:

- * designed for use by present employees
- * allows for up to 500 accounts
- * departmental financial statements including budgets
- * retains standard journal entries
- * automatic balancing of transactions
- * just entry & posting of transactions
- * easy to follow audit trail
- * conventional accounting symbols used

For 9-program package on diskette with user manual send \$495 to:

TASK COMPUTER APPLICATIONS
Dayton, Ohio PO Box 24001
45424
(513) 233-5515 ✓147

TRS-80* DISK SYSTEM SUBROUTINES

provided in machine language for use directly from BASIC
KEYBOARD ROUTINE: Beeps on key input, repeats key when held down, selective lock out of ENTER, BREAK, CLEAR, SPACE, ↑, ↓, ←, →, also and, when multiple entries are not required. Also lock out of non-numeric keys for numeric entries. Does not affect NEWDOS operation of JKL. Does not bounce. Clear unshift gives clear entry function. Clear shift clears screen.

LARGE INTEGER FUNCTIONS: Store and recall to disk not only 3 digits to one byte and 5 digits to two bytes, but also 8, 10, 13, 15, and 17 digits to 3, 4, 5, 6 and 7 bytes respectively. Saves a lot of disk file room.

COMPRESSED ALPHA: Store up to 4 alpha characters in 3 bytes.
LINE PRINTER TEST ROUTINE: To save your TRS-80 hanging up with a "not ready" code from your line printer, this routine gives an error message - without destroying the screen contents.
ALL THESE ROUTINES fit into less than 10 sectors on the disk \$25 for any one routine, \$20 for the second and above \$2.50 postage etc required. Cheque, Money Order.

Ontario residents add 7% SALES TAX

Specify 16K, 32K, 48K, NEWDOS, or TRSDOS when ordering.

Harris Data Systems

2390 Eglinton Avenue East, Suite 208,
Scarborough, Ontario M1K 2P5
(416) 759-6235 ✓13

*TRS-80 is a registered trademark of Tandy Corp


Subscription Problem?

80 Microcomputing does not keep subscription records on the premises, therefore calling us only adds time and doesn't solve the problem.

Please send a description of the problem and your most recent address label to:

80 Microcomputing
Subscription Dept.
PO Box 981
Farmingdale, NY 11737

Thank you and enjoy your subscription.

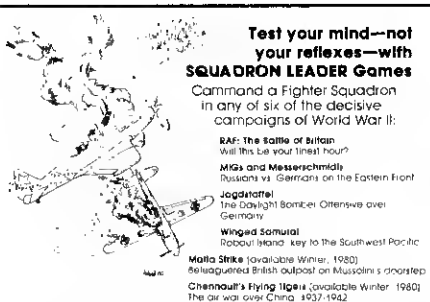

Test your mind—not your reflexes—with SQUADRON LEADER Games

Command a Fighter Squadron
in any of six of the decisive
campaigns of World War II:

- RAF: The Battle of Britain
Will this be your finest hour?
- MGA and Messerschmidt
Russian vs. German on the Eastern Front
- Jagdflieger
The Daylight Bomber Offensive over
Germany
- Winged Samurai
Rapprochement key to the Southwest Pacific
- Mafia Strike (available Winter, 1982)
Relinquished British outpost on Mussolini's doorstep
- Chennault's Flying Tigers (available Winter, 1982)
The air war over China, 1937-1942

Squadron Leader games are not just shoot 'em up arcade games, but detailed historical simulations. Each of these games gives you a choice of dozens of combinations of friendly aircraft (controlled by you) and enemy aircraft (controlled by the computer). Each is carefully researched and simulated for factors of speed, maneuverability, firepower, sturdiness, and rate of climb. Success or failure depends on your ability to learn and exploit the advantages and weaknesses of every aircraft.

Each game includes an audiotape cassette for 16K TRS80 Level II, Apple II (16K or larger), and the new 16K PET; loading instructions; a tactics reference card, and player's manual, in an attractive bookshelf box. Price is \$19.95 ✓412
Discovery Games • 936 W. Hwy 36 • St. Paul, MN 55113

HOMES for the TRS- 80

Featuring

- High Quality, Commercial,
and Economy Models.
- Computer: Commodore 128
\$129.95
- Printer: Starlet \$329.95
- Complete TRS-80 Business
System, built-in.

Custom furniture for the
TRS-80 office or home decor.

—FOR 24 HOUR INFORMATION—

PHONE 408-946-1265

AVS AUDIO VIDEO 2485 AUTUMNVALE AVE
SYSTEMS SAN JOSE, CA. 95132

Dealer inquiries invited.

MODEL II SOFTWARE HOST

HOST allows you complete control of your Model II system from a remote location. **HOST** will allow you to perform any Model II function as though you were actually sitting at the Keyboard, yet still allows the Model II to operate normally. With **HOST** you can send and receive programs, data files, access disk and printer. Just connect your Model II via telephone or direct line, to any standard terminal. You can even use a second Model II or a Model I as terminal! **HOST** gives you the power of a second computer system for only \$139.00.

SPRINT

SPRINT adds a screen print command to your Model II. The contents of the screen will be sent to your printer at the press of a key, or by software control. **SPRINT** is loaded in via DOS, and remains in the system, letting you print out in DOS, or BASIC. **SPRINT** requires no modification to your programs. Only \$19.95.

Order now from:

COMPU-SERVICES
P.O. Box 324
Somerset, MA 02725
✓363

TERMS Cash or Money Order. Personal checks require 3 weeks processing time. Add \$2.00 for postage and shipping Mass. residents add 5% Sales Tax

THE ALTERNATE SOURCE

The magazine of advanced applications and software for the TRS-80

138

If you keep this up, you'll not only have a winner, but you will also provide a valuable service to many, many TRS-80 computerists.

HOUSTON, TX

I think your approach is terrific; a magazine devoted to someone other than the beginner has been sorely needed on the market for a long time.

PENDLETON, IN

Along with the OCTUG Newsletter, yours is the best I've seen for important info on the TRS-80.

ATLANTA, GA

I'd like to say that I'm very glad I took the gamble and subscribed to The Alternate Source News; it looks like I made the right choice. Keep up the good work!

MAKAWAO, HI

Of the several TRS-80 publications I take, I like The Alternate Source News the best so far!

STUDIO CITY, CA

I was so pleased at being approached as if I knew something about computers' and programming, that I not only read every word, but am also enclosing a check for nine dollars.

CANOGA PARK, CA

I just received my copy of Issue #2 of TAS. I'm really impressed. You've done a great job!

WAUKEGAN, IL

Okay, I'm hooked. Enclosed is my \$9.00 check.

FRANCONIA, VA

IF YOU'RE SERIOUS ABOUT PROGRAMMING, YOU SHOULD SERIOUSLY CONSIDER THE ALTERNATE SOURCE NEWS.

☐ Sounds good! Enclosed is \$9.00 for six issues. Please start my subscription with Issue number _____.

☐ Yeah, it sounds good, but I'd like to see a copy before I subscribe. Enclosed is \$2.00 for the current issue.

NAME _____

ADDRESS _____

CITY, STATE, ZIP _____

Mail to: The Alternate Source, 1806 Ada Street, Lansing, MI 48910

FILL IN THE BLANKS!!



Get rid of those cumbersome INPUT statements and fill in the blanks, tables or forms drawn on the screen of your TRS-80 Model I. Allows you to enter data more quickly with fewer errors.

Easily adaptable to any Level II BASIC program, the package includes a machine language program for cursor control and a lightning fast procedure for reading data from the TV screen.

The four 'arrow' keys gives fantastic editing power — Makes entering data fun. You'll wonder how you ever did without it! Machine language code is relocatable too. Use it with any size memory and/or other machine language program without modification.

Package 1 — Complete written documentation, instructions, examples and program listings. \$19.95

Package 2 — Pkg. 1 plus programs on Level II cassette. Saves about 90 minutes of typing. \$24.95

Package 3 — Same as package 2 but with diskette. \$26.95

VISA and MASTERCHARGE accepted. Phone orders welcome.

ACR Consultants 282

1000 North Bitner Road
New Palestine, IN 46163 317-861-6319

its...SOFTWARE COMPU-DIET

COMPU-DIET is an exciting, new, easy to use weight loss system. Psychologists and nutritionists have combined with computer technology to create COMPU-DIET: a program that allows you to spend minutes a day at your TRS-80* and lose lbs. per week.

Each day you and your family use COMPU-DIET, your bodies will come closer to healthful equilibrium — using foods that you like. With this new scientific technique, your computer will help you create a unique metabolic balance that guarantees optimal weight loss. Finally, the ultimate weight loss diet; one you can stay with and lose all you want — 10, 30, 50 lbs. or more.

COMPU-DIET is written in BASIC for the TRS-80 16K Level II. The full price of \$19.95 includes behavior mod program, nutrition database, weight forecast program, and Weight Loss booklet.

Other TRS-80 Its...Products

MINIVENT - Minimal Inventory Control
1400 items, 16K Level II
SE - Search Entry Retrieval Program
Machine Language, 12 to 44K ASCII char
BASICO - Machine Language I/O for BASIC
Data and Programs to Tape or Disk

Please send

☐ COMPU-DIET 1.2 @ \$19.95 ☐ SE 2.0 (tape) @ \$24.95
☐ MINIVENT 2.0 @ \$49.95 ☐ SE 3.0 (disk) @ \$49.95
☐ Additional Information ☐ BASICO 1.5 @ \$19.95

Fla. Res. add 4% Sales Tax - Total \$ _____

☐ Check/Money Order ☐ VISA ☐ MASTERCHARGE

Card No. _____ Exp. Date _____

Name _____ Bank No. (MC) _____

Address _____

Its... Information Technology Systems

POB 2867 Sarasote FL 3357B

(813) 366-0064 301

*TRS-80 is a trademark of Radio Shack, a Tandy corporation

SMALL SOFTWARE SYSTEM

PRODUCTS FOR THE TRS-80

SMALL SOFTWARE SYSTEM

NEW!

PENMOD - \$19.95. Adapts Disk-Pencil to Radio Shack lower case modification. Also adds single page printing and several other new features.

SCRIPMOD - \$14.95. Add TRS232 print driver, or add handshake/linefeed control to RS-232-C driver in Radio Shack's SCRIPSI (disk version only).

WHISTLER: HOME CONTROLLER INTERFACE - \$34.95. New hardware product that controls lights, appliances, computer peripherals, darkness timers and other 115 volt devices anywhere in your house! Software controlled by cassette cable. Use with Sears or BSR Home Control System with ultrasonic option. Assembled, tested, self-contained, and includes Basic software.

UTILITIES

RSM-2: MACHINE LANGUAGE MONITOR FOR 16K TRS-80'S - \$26.95

RSM-2D: THREE VERSIONS OF RSM-2 FOR DISK SYSTEMS - 29.95

RSM-2 RELOCATOR: PUT RSM-2/2D ANYWHERE IN MEMORY - 9.95

Machine Language monitors with Z-80 disassembler! HEX and ASCII memory dumps; EDIT, MOVE, EXCHANGE, VERIFY, FILL, ZERO, TEST, or SEARCH memory, read/write SYSTEM tapes, enter BREAKPOINTS, PRINT with TRS232 or Centronics, read/write disk sectors directly! RSM-2 tape loads at top of 16K LEVEL I or II; RSM-2D disk includes 3 versions for 16K, 32K and 48K.

DCV-1: CONVERT SYSTEM PROGRAMS TO DISK FILES - \$9.95. Execute Adventure, Air Raid, RSL-1, ESP-1, T-BUG, etc. from disk, even if they interfere with TRSDOS! New version works with TRSDOS 2.3.

BASIC-1P: LEVEL-1 BASIC WITH PRINTING! - \$19.95. Run any LEVEL-I BASIC program on your 16K Level-2. PLUS LPRINT and LLIST with our TRS232 or Centronics. Furnished on tape; can be used from disk.

MACHINE LANGUAGE GAMES

AIR RAID, BARRICADE or RSL-1: - \$10.00 each, all 3 for \$25.00

AIR RAID: A super shooting gallery; our most popular game. Ground based missile launcher shoots high speed aircraft! Hours of fun!

BARRICADE: "BREAKOUT" for the TRS-80! Break through 5 walls with high-speed ball and keyboard controlled paddle! 96 different options!

RSL-1: Enter patterns with repeating keyboard! Save patterns on tape (4 furnished). Play John Conway's LIFE. FAST - about 1 second per generation!

SMALL SYSTEM SOFTWARE P.O. BOX 366 NEWBURY PARK, CA 91320

PROFESSIONAL SOFTWARE

NEW! ELECTRIC PENCIL-IIB FOR MODEL-II. Super Pencil version runs under TRSDOS or CP/M. Automatic centering, dynamic print formatting, single-page printing, etc. Buffered keyboard eliminates missed characters at line ends! Diablo, NEC, Qume versions include bold face print, variable pitch, & more! TRSDOS PENCIL: Standard printer - \$325; Diablo, NEC, Qume (specify) - \$350 CP/M PENCIL: Standard printer - \$275; Diablo, NEC, Qume (specify) - \$300

ELECTRIC PENCIL FOR MODEL-I: TAPE-\$99.95, DISK-\$150.00. Popular video editor for creating and saving text files. Prints formatted copy with right justification, page titling & numbering, etc. Upper case only, or lower case with modification. Requires at least 16K.

RSMII: ENHANCED RSM MONITOR FOR THE MODEL-II - \$39.95. Relocatable version of RSM-2D plus screen editor for modifying either memory or disk sectors in both Hex and ASCII, split screen scrolling, and formatted serial or parallel printing. Sold on self-booting disk; directions to save as TRSDOS file.

CP/M OPERATING SYSTEM: MODEL-I - \$145.00; MODEL-II - \$170.00. The 8080/280 "Software Bus" for TRS-80's. Model-I includes TRS232 and RS-232-C software. Model-II supports single and double density disks, and reads TRSDOS files. Many unique utilities included in both versions!

PRINTER SUPPORT

TRS232 PRINTER INTERFACE - \$59.95 Assembled & tested printer interface for RS232 or 20-mil current loop printers. Expansion interface not required. Print from level-II BASIC, CP/M, BASIC-1P, ELECTRIC PENCIL, etc. Standard cassette software included. Add \$2.00 for shipping.

TRS232 "FORMATTER" SOFTWARE PACKAGE - \$14.95. Adds page and line length control, printer pause, "smart" line termination, etc. to TRS232.

RSM232: Adds RS-232-C capability to RSM-2/2D monitors - \$9.95

PEN232: RS-232-C for cassette version Electric Pencil - 9.95

EDT232: TRS232 and RS-232-C for tape version of EDITASM - 9.95

OTHER PRODUCTS FOR THE TRS-80

ESP-1: \$29.95. Assembler, Editor, Monitor (8080 mnemonics)

LS1-1: 8.00. Listing of Level-1 BASIC with some comments

CP/M tm Digital Research, Inc. TRS-80 tm Tandy Corp.
See your dealer or order direct. Calif. Residents add 6% tax

30

SMALL SYSTEM SOFTWARE P.O. BOX 366 NEWBURY PARK, CA 91320

How to connect up a SWTPC printer to your system.

PR-40 Printer Interface

John W. Hise
67727 SR 13
Millersburg IN 46543

When something with the impact of the TRS-80 comes along—so different in physical make-up and software

requirements from the typical hobbyist's S-100 system—it is difficult to explore state of the art hardware and software without purchasing a new system.

Because of all the interest generated by the TRS-80 I had decided to buy a Level II unit

with 4K of RAM which I have since raised to 16K, and the expansion interface. With some work, I could interface the many peripherals I already owned—a 22-slot IMSAI, a North Star disk system, two video terminals, a teletype and a PR-40 printer.

What's Missing?

One of the first things I missed as I began to explore the TRS-80 was hardcopy output. However, an inexpensive printer of non-Radio Shack manufacture provided a solution. This article describes the trials and tribulations of interfacing the SWTPC PR-40 printer to the TRS-80. I hope my experience is valuable to others who, like myself, cannot afford a one to 2,000 dollar printer.

Either hardware or software can resolve incompatibility between an expansion interface output port and a printer input port. To keep everything simple, I would have liked to connect a cable from the printer to the TRS-80 and seen everything take off and run properly just by entering LPRINT or LLIST statements. But it doesn't work that way.

The South West Technical Products Corp., or SWTPC (219 W. Rhapsody, San Antonio, TX 78216), PR-40 is a five by seven dot matrix impact printer that prints the 64 character upper-case ASCII set. It prints up to 40 characters per line (as opposed to the Radio Shack printer's 132)

at a rate of 75 lines per minute, on readily available 3-7/8" rolls of adding machine paper.

A line is printed when either the internal 40 character line buffer is full or upon receipt of a carriage return. The PR-40 accepts data as fast as one character per microsecond. All inputs and outputs are TTL compatible and interface via a 12 pin nylon connector.

The signals expected by the printer are D0-D6, representing ASCII data and an input data strobe signal. The printer will then send a status signal to the TRS-80 when it's time to send data. Hardware inside the printer decodes a carriage return, ODH, and prints when it is received with data. A line feed is automatic whenever a carriage return is forced or decoded.

PR-40 timing is shown in Fig. 1. All signals represent positive logic; +5 VDC is equivalent to a one.

At point A on the descending edge of the signal the printer looks at the data, D0-D6, to see if a carriage return, ODH, is present.

At point B on the rising edge of the strobe pulse data, D0-D6, are parallel loaded into a 40-character line buffer. At C a control character, ODH, has been detected. The status signal goes low until the carriage return is physically completed. At D the status signal remains low indicating that the printer is busy.



Photo 1. Underside of the connector interface showing wirewrap connections.



Photo 2. Finished interface cable in its enclosure.

MARK GORDON COMPUTERS

A DIVISION OF MARK GORDON ASSOCIATES, INC.
15 Kenwood Street, Cambridge, Massachusetts 02139, (617) 491-7505 ✓270

SORT-80

**Produced exclusively for
Mark Gordon Computers by SBSG**

TRS-80* disk files may be sorted and merged using SORT-80, the general purpose, machine language, sort program. Written in assembly language for the Z-80 microprocessor, it can:

- Sort files one disk in length
- Sort Direct Access, Sequential Access and Basic Sequential Access files
- Reblock and print records
- Recontrol files from disk
- Be executed from DOS
- Be executed from BASIC
- Be inserted in the job stream
- Allow parameter specification
 - input/output file specification
 - input/output record size
 - lower/upper record limit
 - print contents of output file
 - input/output file key specifiers

The minimum requirement is a 32K TRS-80* Level II computer with one disk drive or a single drive Model II computer. It will operate on 35, 40 and 77 track drives, and has been tested on TRSDOS 2.1, 2.2, 2.3, NEWDOS 2.1, 3.0, and VTOS 3.0.1. It is compatible with most machine language printer drivers. Sort time is fast; for example, a 32K file will sort in approximately 40 seconds. **\$59.**

PCS

Program Catalog System from SBSG

This menu driven system provides the TRS-80* user with a computerized method to keep track of all programs and data files. The idea is to build and maintain on a file a disk detailing each program including program name, size, creation date, and a brief narrative as to function. Programs are provided to:

- create, update, or display
- print in disk number order
- print in alphabetical order
- print file listing
- create a file automatically

With a 32K system you can catalog 150 programs; with a 48K system you can catalog 300 programs; or you can catalog 650 programs without sort. **\$29.**

*TRS-80 is a registered trademark of Radio Shack, a division of Tandy Corp.

InfoBox

The information manager

InfoBox is the easiest-to-use information manager available for the TRS-80*. It's ideal for keeping track of notes to yourself, phone numbers, birthdays, inventories, bibliographies, computer programs, music tapes, and much more. This fast assembly language program lets you enter free-format data, variable length items and lets you look up items by specifying a string of characters or words that you want to find. You can also edit and delete items. Items entered into InfoBox can be written to and read from cassette and disk files. All or selected items can be printed on a parallel or serial printer. InfoBox occupies 3K. Specify cassette or disk version. Special introductory price **\$24.95** until June 15; **\$29.95** after.

DEBUG+

The ultimate monitor/disassembler

Compare the features and price of **DEBUG+** with other monitor/disassembler programs. It offers nine true, single-byte breakpoints, single step program execution, hex and decimal arithmetic including multiply and divide and conversions, ASCII dump that distinguishes all 256 codes, disassembly to screen and printer in full Zilog mnemonics, and register set command. It also has the usual port I/O, hex and decimal memory dump, change, move, copy and exchange memory features offered by others. Ideal for the user who wants to experiment with assembly language or to write subroutines to call from BASIC; essential for the serious programmer. Special introductory price **\$24.95** to June 15; **\$29.95** after.

FMS

File Management System by SBSG

This menu driven program allows you to define and create files for your own use. You can:

- sort these files in:
 - ascending order
 - descending order
 - on up to 3 separate fields
- scan the files
- summarize any numeric or dollar data fields
- print the field records
- create, add to or delete field records

\$49.00

Model II versions of SBSG software available. Dealer inquiries invited.

The pinout of the 12-pin connector, J-4, shown in Fig. 2 is the link to the TRS-80.

Parallel In/Out Port

The TRS-80 expansion interface has an eight-bit parallel output port. This memory-mapped output port that is addressed like a software memory element, is located at 37E8H, 14312D. To output to this port, an eight-bit byte of data is written to the address.

Also located at this address is a memory-mapped four-bit input port. Data is input to this port by reading memory location 37E8H. The four bits of data read in D4-D7, are used to indicate the following:

D7—printer busy
D6—printer out of paper
D5—unit selected?
D4—fault condition

Data elements D0-D3 are not wired up in hardware and can only be input as ones. Of the above signals, most applications will require only D7 to indicate if the printer is ready to receive data. Inputs D4-D6 must be terminated, if not used, to be compatible with the Radio Shack line printer software routine.

Each time a byte of data is sent to memory address 37E8H, the MWRITE pulse generates the data strobe pulse for the printer. The data strobe pulse is a one microsecond pulse to ground.

The parallel output port can be written to or read from at least three different ways. First,

you can write and enter a machine language program that manipulates memory location 37E8H.

A second way uses the BASIC statements—POKE to output data and PEEK to input data. For example, POKE 14312,255 enters a binary 1111 1111B into memory location 37E8H (in reality the line printer output port latch). Any data, 0-255D, can thus be POKED.

Similarly, to input this port, A = PEEK(14312) returns the printer status data, the four upper bits, D4-D7, as the value of A. Remember that the lower four bits, D0-D3, are not supported in hardware and are always input as ones.

The third way to utilize this port is via the LLIST and LPRINT statements. Enter LLIST and a carriage return. The status bits

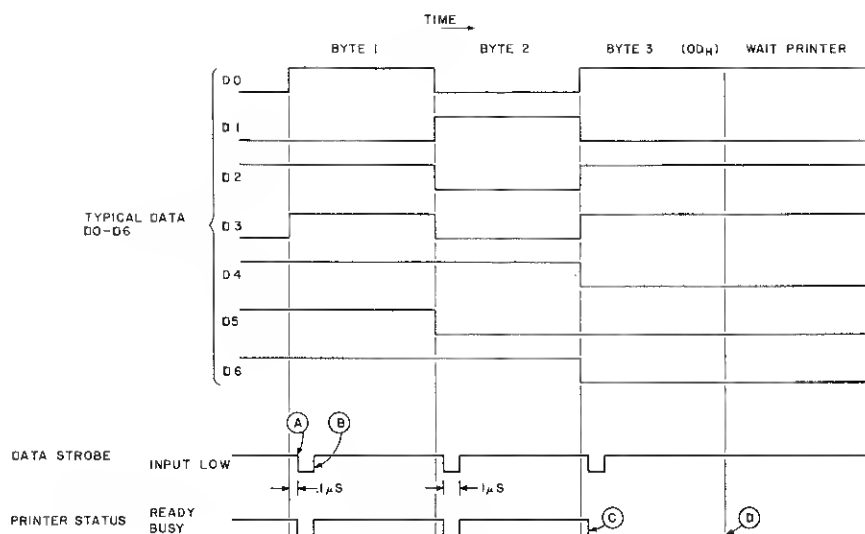


Fig. 1. PR-40 signal input timing requirements.

are input at 37E8H and bit D7 is checked to see if the printer is busy. If not, the status bit D7 will be low - indicating the printer is ready for data. See Fig. 3.

If no printer has been hooked up, D7 will be high, indicating the printer is busy, and the TRS-80 will lock up. There is no termination provided in the expansion interface.

Fig. 4 shows the connections, required by the printer of the expansion interface.


Constructing a Cable

With the signal timing and

voltage relationships in hand, we can construct cable with the 34 pin expansion interface connector on one end and the 12 pin PR-40 printer connector on the other (Photo 1).

In order to connect the cables easily and keep the printer compatible with my IMSAI, I used the 16 pin dip header and plug. The perforated board also allowed me to wire any required hardware circuit. (See Parts List.)

To install the 34 pin Alpha connector, I carefully attached the 34-ribbon wire to the connector. I then put the connector into

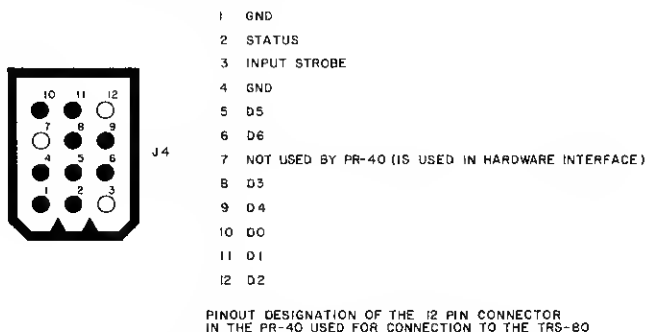

PINOUT DESIGNATION OF THE 12 PIN CONNECTOR IN THE PR-40 USED FOR CONNECTION TO THE TRS-80

Fig. 2. Pinout of the PR-40 12 pin designation.

Decimal address	Mnemonic	Hex code	Decimal value
32750	LDA	3A	58
32751	E8	E8	232
32752	37	37	55
32753	AND n	E6	230
32754	80	80	128
32755	JR Z	28	40
32756	F9	F9	249
32757	LDA,C	79	121
32758	LDA	32	50
32759	E8	E8	232
32760	37	37	55
32761	CP	FE	254
32762	0D	0D	13
32763	RET NZ	C0	192
32764	LDA	32	50
32765	E8	E8	232
32766	37	37	55
32767	RET	C9	201

Table 1. Machine language code listing of software.

Quan.	Description	Source
1	Perforated circuit board cat. #276-1379	Radio Shack
1	Mounting box 2 1/2 x 5 1/2 x 1/2	Radio Shack
1	16 pin WW IC socket	Jameco Electronics
1	16 pin WW dip plug w/cover	Jameco Electronics
34	Vector T44 miniwrap terminals	Jameco Electronics
6"	34 conductor cable .1" center	Jameco Electronics
1	Alpha 34 pin connector part #FCC-170	Pioneer Electronics

Parts List.

Please note: Our CRT SCREENS have been purchased by thousands of individuals, the Department of the Navy, several government agencies, and dozens of the country's top corporations and universities.

- Give your CRT the luminous green characters found on the very expensive computer systems.
- Add a professional look to your system and your programs.
- Dramatically improved contrast for easier reading and improved graphics.

We manufacture an optically correct, 1/8" plexiglas screen that mounts easily over the CRT on your video monitor. This is a quality accessory that enables your TRS-80 monitor to produce the luminous green characters identical to those found on expensive terminals. For business applications this means enhanced appearance and reduced eye strain, for the hobbyist, graphics are brighter and bolder. The screen may be easily removed—no modification to monitor.



✓ 142

National Tricor, Inc. / 3335 Greenleaf Blvd., Kalamazoo, MI 49008 / 616-375-7519

Screen for Model I . . . \$19.95

Screen for Model II . . . \$24.95

VISA - Mastercharge

We ship within

24 hours.

30-day money

back guarantee



SEND \$9.95 CHECK OR MONEY ORDER
TO:
SEMISOFT
121 MADISON AVENUE
NEW YORK, N.Y. 10016

THE BLINKING CURSOR

MACHINE LANGUAGE ROUTINE FOR TRS-80 16K LEVEL II

LOADS IN SECONDS FROM CASSETTE
INTO LESS THAN 1/2K BYTES OF PROTECTED
MEMORY AND TIES INTO ROM KEY SCANS

Customize Your Cursor:

SELECT ANY CHARACTER OR GRAPHICS BLOCK
AND WATCH IT BLINK!
CHANGE AS OFTEN AS YOU LIKE.

FEATURES:

- FAST REPEATING ← KEY AND SPACE BAR
- INSTANT SWAP WITH RESIDENT CURSOR
- UNAFFECTED BY NEW OR RESET
- WORKS IN COMMAND- EDIT- EXECUTE MODES
- KEY DEBOUNCE

• T.M. TANDY CORP.

A System Cassette from Semisoft ✓ 290

Computers & Gambling Magazine

PRESENTS: PROBABILITY HANDICAPPING DEVICE I

A 16K BASIC PROGRAM FOR: HORSE RACE HANDICAPPING!

This amazing program was written by a professional software consultant to TRW Space Systems and is being introduced by the publishers of Computers and Gambling Magazine. "PHD-1" is a large complex basic program requiring a full 16K. It is carefully human factored for easy use. PHD-1 is a comprehensive horse racing system for spotting overlays in thoroughbred sprint races (less than 1 mile). You simply sit down with your computer and the Racing Form the night before the race and answer 5 or 6 questions about each horse's past performance. Your computer then accurately predicts the win probability and odds-line for each horse allowing you to spot overlaid horses while at the track. The users manual contains a complete explanation of overlay betting.

Statistics for thousands of horses were used to develop this handicapping system. The appendix of the manual contains a detailed lab run of a 100 consecutive race system workout showing an amazing 45% positive return (45¢ for each \$1.00 wagered). A graph is also included showing PHD-1's close fit to the ideal predicted probability vs. actual win percentage curve.

This program features: ☐ Win probability and odds for each horse. ☐ Verification display of each horse's parameters prior to entry for easy error correction. ☐ Bubble-sort routine for final display. ☐ Facility for line printer output. ☐ Cassette ARCHIVE routine to store PHD-1's output for later analysis. ☐ Complete users manual.

The user's manual may be ordered separately for your pursuit for \$7.95 and will be credited if you purchase PHD-1.

PHD-1 User's Manual and 16K Cassette for:
Apple II Applesoft, Challenger (Specify Type),
TRS-80 Level II, Pet

\$29.95

Make checks payable to: Ca. res. add 6%

✓ 193 JOE COMPUTER

22713 Ventura Blvd., Suite F, Woodland Hills, CA 91364

*BE A WINNER. Get on the Computers and Gambling Products Magazine mailing list for \$3.00 and receive available back issues.

†TRS-80 is a registered trademark of Tandy Corporation

TRS 80

ROM

Wasn't built in a day!

And you need a good guide to explore it. SUPERMAP is an invaluable aid in discovering the hidden secrets of Level II ROM. SUPERMAP is a long detailed and commented memory map of ROM routines giving register setups for calling them. Reserved RAM is revealed along with DOS RAM usage. There are notes on the significant addresses in the Radio Shack Editor /Assembler, TBUG, and the Electric Pencil. Tape and memory format are given too. Learn which version of Level II ROM you have and what the differences are. All this and more for only

\$16.XCV

Fuller Software

630 E. Springdale
Grand Prairie, TX 75051
(214) 642-0441

✓ 102

Whether you are experienced or just beginning in assembly language programming you will recognize the need for at least three types of programming aids: an editor/assembler, a monitor and a disassembler.

DISK*MOD will read in your Radio Shack editor/assembler, modify it, and write the improved version to disk. This new E/A will not only allow you to display the directory on the screen but gives you the disk space used by each file and the remaining free granules. **DISK*MOD** can display the number of bytes used by your text buffer and how many remain free. You can kill a file from a mounted disk. All cassette operations remain functional. **DISK*MOD** improves manual scrolling by allowing a full fifteen lines of text to be displayed instead of only seven as in the original E/A. The 'DEPM' output is altered to 8 bytes per line instead of only one. Output to the printer is paged at 56 lines per page with optional paper change prompting. The 'B' command branches to any address you choose instead of 0000H. The symbol table is sorted alphabetically and output five across. You can protect high memory for monitors, drivers, et cetera and recover from reboots with your text buffer intact. You can move blocks of text which will allow you to keep and use a library of subroutines on disk. The global change feature becomes highly desirable when you have a disassembler which generates symbolic labels.

The next tool a programmer needs is a monitor to examine, modify, and debug programs. **TUTIL** has many useful features. You can display memory simultaneously in ASCII and HEX. Output can also be directed to the printer. Blocks of memory may be compared byte for byte or a search might be done for a particular sequence of bytes. The 7-80 registers can be displayed and altered. You can fill blocks of memory with a given byte or change a single byte. Alphanumeric data can be entered directly into memory from the keyboard. Blocks of memory can be moved, breakpoints set or reset, and addition and subtraction done in hexadecimal. You can load SYSTEM tapes into memory, execute or verify them, and punch out new SYSTEM tapes. The best part is that an E/A modify program for tape users is also included in the **TUTIL** package. Although not providing all the features of the **DISK*MOD**, it does allow you to protect memory and recover from resets. Since BASIC's pointers are not destroyed you may go back and forth to the E/A without having to reload it or your source text. **TUTIL** has all the above commands plus the ability to scroll through a disk drive sector by sector, load and save sectors from a buffer and enable/disable interrupts.




The third tool is a disassembler. **DISASSEMBLER 1.2** not only disassembles to video or printer but also outputs to tape in a format compatible with E/A. Now you can take apart someone else's code and modify it for your needs. The real beauty of **DISASSEMBLER 1.2** is the symbolic labels and equates that this two pass program produces. **DISK*MOD** users can easily change all the Z1A19 labels to BASIC, for example. Output to printer is 50 lines per page with optional paper change prompting. A source file may be written to disk with **DISASSEMBLER 2.0**.

DISK*MOD (32K+ DISK)	\$20
DISASSEMBLER 1.2 (16K+)	\$15
DISASSEMBLER 2.0 (32K+ DISK)	\$20
TUTIL (16K, 32K & 48K)	\$15
DUTIL (16K, 32K & 48K DISK)	\$20

VISA

Master Charge

*TRS-80 is a trademark of Tandy Corp

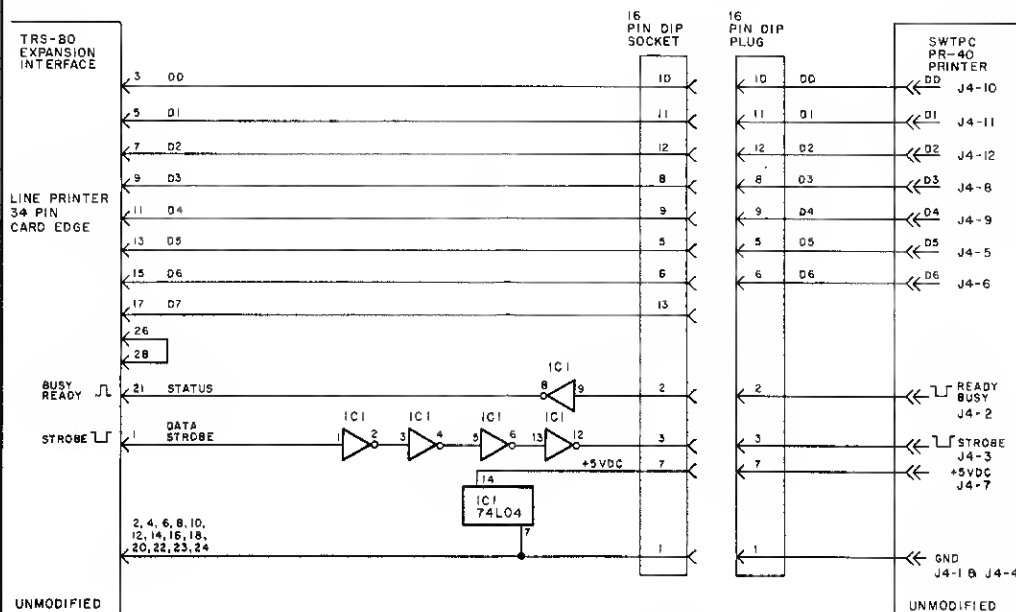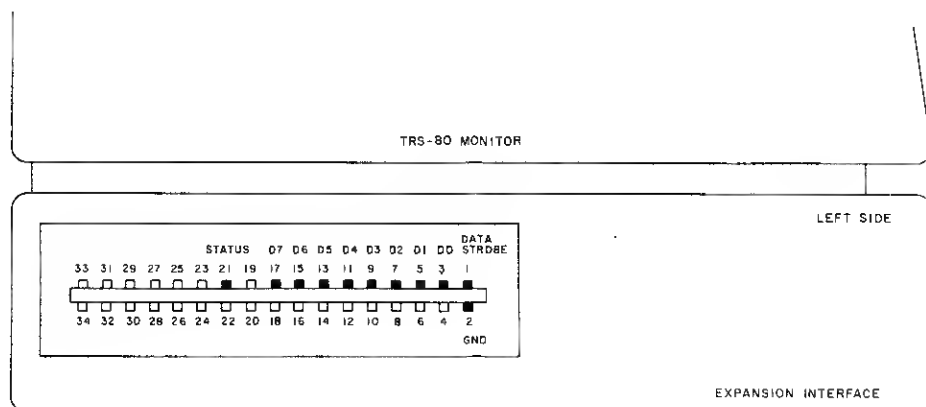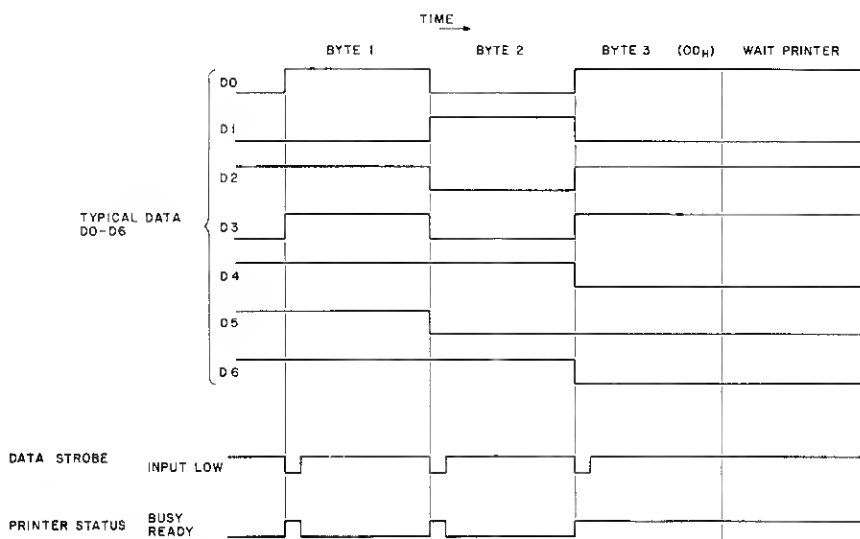

a bench vise and completed the crimp.

With a hardware interface the PR-40 printer will electrically resemble a Radio Shack line printer.

Fig. 5 and the signal timing diagrams for the PR-40 and the TRS-80 show that the status (busy) signal of the PR-40 is the opposite of what the TRS-80 expects.

Inverter IC1, wired into the status signal, corrects that situation and provides the TRS-80 software with the expected signal.

This would seem to be all that is needed. However, when only this is done and the LLIST statement is utilized, all carriage returns in the program listing are ignored. Careful study of the Radio Shack printer manual and the PR-40 circuit description finally revealed the problem.


The PR-40 recognizes control codes (like the carriage return) on the falling edge of the strobe pulse (Fig. 1), while the TRS-80 data to be output, D0-D7, is not valid on the falling edge (Fig. 3).

However, in Fig. 6 (from the Radio Shack printer manual), the specifications indicate the falling edge of the strobe pulse should occur a minimum of one microsecond after valid data is present on data lines D0-D7. If the TRS-80 had output data to the printer per its own specifications instead of those in Fig. 3, there would have been no problem. (Alphanumeric data isn't affected because the printer recognizes it one microsecond after it is valid on data lines D0-D7 on the rising edge of the strobe pulse.) But since ODH, a carriage return, is a control character, it will never show up as valid data at the right time during the TRS-80 line printer output cycle.

The strobe pulse had to be delayed just long enough for valid data to exist on lines D0-D7 before the strobe pulse went to ground. I did this by using four inverters in series as shown in Fig. 5. This was no problem as the IC was needed to invert the printer status signal anyway.

I used a 74L04 to provide maximum signal delay per gate—about one-half as fast as a

THE COMP-CASE

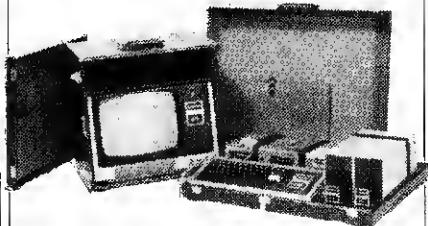

ATTACHE STYLE CASES FOR CARRYING AND PROTECTING THE TRS-80 COMPUTER. HIGH QUALITY LUGGAGE CONSTRUCTION. ONE CASE FOR COMPUTER, EXPANSION UNIT, TAPE RECORDER OR DISK DRIVES. SECOND CASE FOR MONITOR WITH EXTRA SPACE FOR MODEM OR MINIPRINTER. NEVER A NEED TO REMOVE EQUIPMENT FROM CASE. SIMPLY REMOVE COVER, CONNECT POWER AND OPERATE. COVER CAN BE REPLACED AND LOCKED FOR SECURITY WITHOUT DISCONNECTING CABLES. OPTIONAL RF-MODULATOR CONVERTS ANY TV SET INTO A MONITOR MAKING IT UNNECESSARY TO CARRY MONITOR.

RS201 TRS-80 Computer case.....	\$109
RS202 TRS-80 Monitor Case.....	84
RS203 RF-Modulator.....	25
P402 Line Printer II Case.....	89
CC90 Matching Attache Case.....	75

CASES ALSO AVAILABLE FOR APPLE, ATARI, CENTRONICS AND PAPER TIGER

COMPUTER CASE COMPANY ✓ 199

5650 INDIAN MOUND CT., COLUMBUS, OHIO 43213



(614) 868-9464

ENGINEERING SOFTWARE

Now from SUPERIOR

for Structural Analysis Engineers

STRUCTURAL MATRIX ANALYSIS FOR BEAMS. Calculates moments, shears, joint rotations, deflections, and forces for beams of any shape, size, and material. Structural analysis of beams, frames, and trusses. Includes a variety of input and output options. Also includes a variety of input and output options. Also includes a variety of input and output options.

LEISURE PROGRAMS

BOWLING SECRETARY Let your computer tally fees, total pins, games won/lost, hi-10, hi-30, men and women hi-10, hi-30 scratch and handicap, lane assignments with individual data, and next week's lanes. 32K, Level II, one disc. 14.95
Life 7.4 A mathematical simulation of cell colony evolution at a rate of 95 generations per minute by John Conway. Patterns can be stored on disc or tape for recall at any time. Program can also be slowed to 1/3 normal speed or paused indefinitely for closer inspection. 4K, Level II. Tape, 5.95. Disc, 6.95
TUMBLING CARDS Mix mind-challenging math, memory, and word skill problems with the fun, competition, and luck of an exciting casino-style game of cards. Pyramid your skills into imaginary big-money winnings in the winner's circle. 16K, Level II. Tape, 8.95. Disc, 10.95



Postage paid. Missouri residents add 4 1/2% sales tax.

Write SUPERIOR for information about marketing your SOFTWARE.

* SOFTWARE BY ROBERT M. CHAMBERS *

VERY REASONABLE PRICES !!!!!!!!!

- RENUMBER 1 1 — COMPLETELY RENUMBERS LEVEL II BASIC PROGRAMS
- APPENDIX 1 1 — APPENDS LEVEL II BASIC PROGRAMS TO ROUTINES FROM YOUR LIBRARY
- COMPRESS 1 1 — REMOVE SPACES AND REMARKS FROM YOUR LEVEL II PROGRAMS
- FAST SORT — SORT ARRAYS FAST LOADED FROM BASIC. EASY, EASY, EASY TO USE
- MEMDSP — DISPLAY CONTENTS OF MEMORY
- COPYU BASIC PROGRAMS — COPY SYSTEM TAPES
- GAMES — OTHELLO, O-ZONE, CODE-BREAKER, SPACE FIGHTERS, BASEBALL, CRAZZE EIGHTS, STARSHIP LOST AND OTHERS.
- TAPE LIBRARY — KEEP TRACK OF YOUR TAPES.
- DOCUMENT 1 2 — TEXT EDITOR.

WRITE TO: ROBERT M. CHAMBERS
 74 STINSON AVE.
 NEPEAN ONTARIO
 CANADA K2H 6N4

✓ 381



TEACH YOUR CHILDREN

\$5.95 Each—Two For \$11.00

ALPHA—Alphabet recognition for pre-schoolers

SIGMA—Addition problems for Grades 1-3

SIGMA-EX—Addition problems for the younger or slower learner

SPE-L—Spelling practice for Grades 2-4

A computer is for more than business or games.

Level II—Minimum 16K



Mercer Systems Inc.
 87 Scooter Lane ✓ 104
 Hicksville, N.Y. 11801

Energy Conservation Module for IRS-80

Get A Tax Credit up to 30% of the Cost of Your Entire System!

Temperature measurement at up to four indoor or outdoor locations. Controls up to four remote devices. Expandable to 255.

BASIC and Machine Language software documentation supplied. Runs in either with Level II, Level I and TBUG machine language only.

Support software frees system to run other programs concurrently, updating only when changes occur.

Ready to connect and use. Includes interface hardware, software documentation, and complete instructions. Assembled and tested. Under \$200.00

Think Tank Labs ✓ 376
 p.o. box 552
 Melbourne, Florida 32901

*IRS-80 is definitely not a trademark of the Internal Revenue Service.

pattern generator

The program, "SSTV", is a slow scan TV pattern generator designed to run in a TRS-80 Level II with 16K of RAM. It is a machine language program that produces 9 gray-scale and checkerboard patterns in addition to test tones of 1200, 1500, and 2300 Hz. Each function is called by a single keyboard entry. Its output is directed to the tape "AUX" plug, with the resulting audio to be used in a manner similar to that of the tape player in your slow-scan station. Just load and run the program, connect the tape "AUX" plug to your transmitter or tape recorder and select the desired slow-scan output.

Cassette & Documentation..... \$35.00

Cassette, Documentation & Source Listing, \$40.00

N.Y. Residents add sales tax

solutions 80
 Route 55 ✓ 277

La Grangeville, New York 12540

UCSD* System for TRS-80 Model II†

The most portable operating system now supports FORTRAN. Pascal and/or FORTRAN modules are compiled in universal P-code, so they can run on most microprocessors, often without recompiling. Programs execute up to 10 times faster than comparable BASIC programs, and use much less memory. Ready to run on TRS-80 Model II (64K).

FEATURES

- Interactive operating system—dynamic overlays, disk file handling, run-time support and block I/O routines.
- Fast, one pass compilers.
- Two Editors—one screen oriented for programming and text editing, one character oriented for hard copy terminals.
- File handler to manipulate disk files.
- Macro-assembler that produces code for linking with Pascal or Fortran programs.
- Linker for link-editing of object and assembly code modules.
- Library of program modules and utilities.

PLUS, from PCD Systems

- Disk formatting program to initialize diskettes in single or double density formats.
- Configuration program for serial I/O.
- Disk-set program to permit separate assignment of density and format characteristics for each disk drive.

DOCUMENTATION

- UCSD System Manual (400 pages).
- Beginner's Guide To UCSD Pascal.
- Pascal User Manual & Report.
- Fortran User's Manual with Fortran systems.

PRICES

- UCSD System with Pascal Compiler \$350
- with Pascal and Fortran Compilers \$500
- Fortran Compiler alone (requires Version II.0) \$200
- P-Code Interpreter alone (either LSI-11 or Z-80) \$ 85
- Optional Utility Programs
- CP/M† to Pascal file conversion \$ 50
- TRSDOS* to Pascal file conversion \$ 50
- Z-80 Disassembler/Dump program \$ 50

ALSO AVAILABLE

- UCSD System for MINC* or PDT*.
- Z-80 Adaptable System (you write BIOS).
- UCSD System for CP/M environments.

PCD Systems is a licensed distributor of the UCSD System for Pascal and Fortran. Dealer inquiries are invited.

PCD Systems, Inc.

PO Box 143 Penn Yan, NY 14527 315-536-3734

*Trademark of the Regents of the University of California †Trademark of Tandy Corporation *Trademark of Digital Research *Trademark of Digital Equipment Corporation

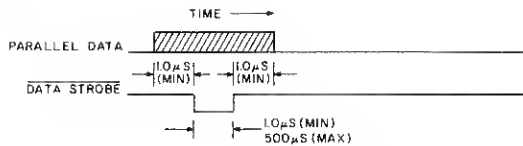


Fig. 6. Required timing of the parallel data and strobe pulse.

regular 7404 inverter. At approximately nanoseconds delay per gate, the strobe signal is delayed .1 to .2 microseconds, enough for the PR-40 to act on the control characters.

The IC1 needed +5VDC, so I decided to get it from the PR-40 via unused pin #7 in the J4 connector, as shown in Fig. 7.

The finished cable is shown encased in Photo 2.

Software Interface

One of the intriguing aspects of microprocessors is that there are many ways to do any one thing. An equally successful way to interface the TRS-80/PR-40 is to wire the two units together as shown in Fig. 8. Note that IC1 is totally eliminated by using software.

The machine language routines that actually drive the lineprinter are found by PEEKing memory locations 16422D and 16423D for the hex address, —058DH. These driver routines contain the desired output byte in the C register.

The busy signal from the printer must be checked by inputting the status bits at memory-mapped location 37E8H to see if bit D7 is high. If it is, the printer is busy and the TRS-80 goes into a loop. If bit D7 is low, the data is written to 37E8H along with a strobe signal to the printer. A carriage return signals the completion of the printed line.

By changing the machine language driver address at 16422D and 16423D to some other RAM address near the top of memory, a new driver routine can allow for the inverted busy signal and eliminate the strobe pulse timing problem. The rapid strobe pulse, encountered in the hardware interface, can be solved by sending two carriage returns to the PR40. Though the printer always misses the first

return because of the timing problem, the code is latched at the output port. The second carriage return now finds stable data when the strobe pulse goes to ground.

The assembly language code for this line print driver is shown in Table 1. Written in Z-80 code, it can be located anywhere in RAM. Since the end of RAM in my 16K system is at decimal 32767, the 18 byte assembly language program, should be located in 32750D to 32767D. A BASIC program that changes the line print driver address to RAM locations 32750D to 32767D is shown in Listing 1.

Changing line 10 enables other TRS-80 RAM configurations to use the same program.

```

5 REM THE PROGRAM STORES A LINEPRINTER
6 REM OUTPUT ROUTINE IN RAM MEMORY
7 REM JOHN HISE 8/30/79
10 M=16:REM =SIZE OF MEMORY IN "K"
20 N=M*4+63
30 S=1024*M+16383
40 PRINT "IN RESPONSE TO MEMORY SIZE?"
50 PRINT "ENTER: ";S-19;" FOR A ";M;"K S
   YSTEM"
60 IF S>32767 THEN S=S-65536
70 POKE 16421,2:POKE 16422,236:POKE 1642
  3,N
80 FOR X=S-17 TO S
90 READ Y
100 POKE X,Y
110 NEXT
120 END
130 DATA 58,232,55,230,128,40,249,121,50
   ,232,55,254
140 DATA 13,192,50,232,55,201

```

Program Listing 1. BASIC program for software interface.

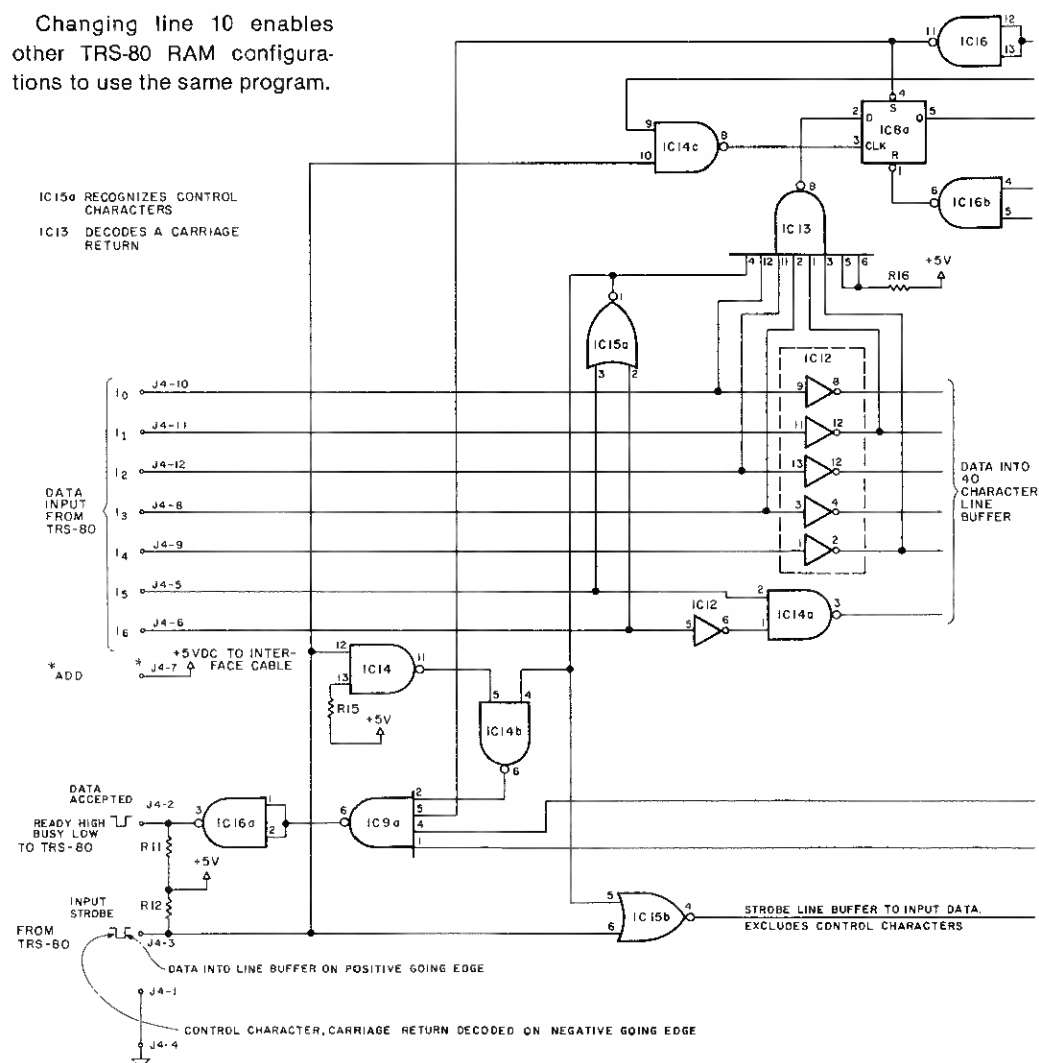


Fig. 7. PR-40 schematic showing signal inputs and outputs.

4K system use 10M = 4
 16K system use 10M = 16
 32K system use 10M = 32
 48K system use 10M = 48

Enter the following, appropriate to your memory size, after power up:

4K system enter 20460
 16K system enter 32748
 32K system enter 49132
 48K system enter 65516

The system is now ready for the LPRINT and LPRINT commands. When outputting control codes to the printer via CHR\$() or POKE, all are ignored except 10D and 13D. To manually force a carriage return enter either LPRINT or POKE 14312,13. CHR\$(10) or CHR\$(13) imbedded in the LPRINT statement forces a carriage return/line feed within the statement in addition to the one at the end of the statement. For example if A=2 and B=3:

LPRINT A;CHR\$(13);B;CHR\$(13);
 "TOTAL A+B=" ;A+B

The following would be output on the line printer when ENTER is depressed:

0
 0

Total A+B=5

References

Bordeau, Denis, *How to use the PR-40 Printer*, Kilobaud Microcomputing, January 1977.
 Cowan, Robert, *A Look at TRS-80 Peripherals*, Kilobaud

Microcomputing, April 1979.
 Domuret, Allan J, *TRS-80 Selectric Word Processor*, Kilobaud Microcomputing, June 1979.
 Morr, David G., *Teleprinter Output for the TRS-80*, Kilobaud Microcomputing, August 1979.

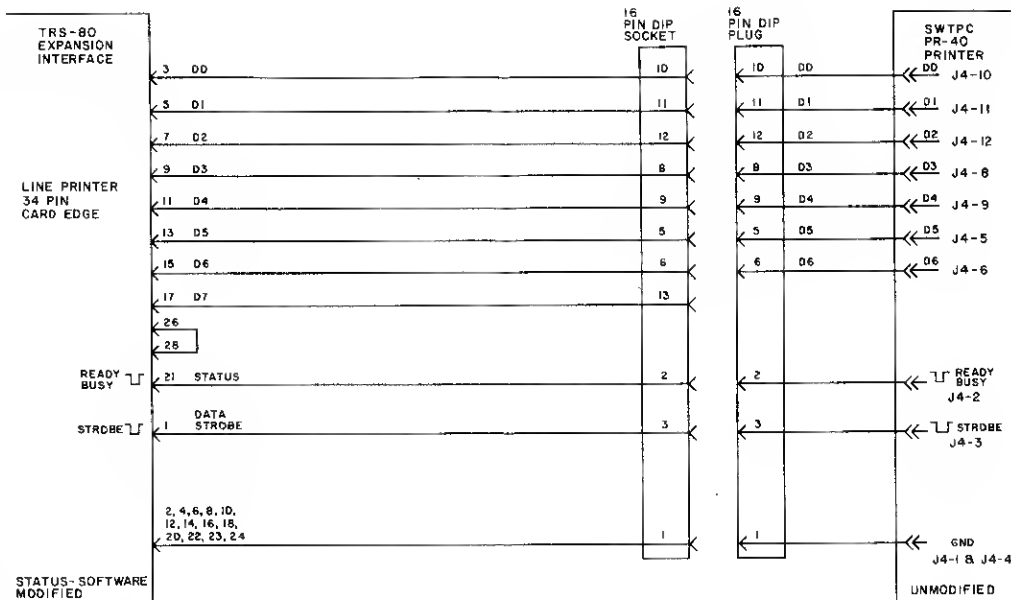


Fig. 8. Interface schematic-software method.

HERE'S HOW! 1. Input data to secretary 2. Into computer 3. Printout back to me. PRESTO! Subdivision calcs in 1/2 the time of a programmable calculator.

OUR MICROCOMPUTER SOFTWARE DOES:

- TRAVERSE GEOMETRY
- COORDINATE GEOMETRY
- PROFILE GRADES
- RADIAL STAKEOUT
- CIRCULAR CURVE GEOMETRY
- CIRCULAR CURVE STAKEOUT

DEVELOPED AND SUPPORTED BY ANDREW MACHEN REGISTERED CIVIL ENGINEER.

Complete Program Package With Instruction Manual **\$260**

MICRO SOFTWARE SYSTEMS
CIVIL ENGINEERING COMP ✓ 95

Call or write for FREE INFORMATION PACKET (714) 755-4033
 143c So. CEDROS, SOLANA BEACH CA. 92075

NOBODY CAN MATCH OUR DOLLAR/QUALITY RATIO!

MS-204 PRINTER

INTRODUCTORY PRICE:

\$795
 CABLE: \$34.50

Compatible with TRS-80, Apple, Pet or any other Centronics-type system

Features

- 132/80 Columns, 63 LPM, Bi-Directional, Nominal Thruput
- 100% Heavy Duty Cycle - High Reliability, 100 Million Character Print Head Life
- Sprocket Feed; Variable Forms Width, 2.5" - 9.5"
- Double Width Characters: 40,66 Characters per line
- 9 x 7 Dot Matrix Character Font
- 6-Channel Electronic Vertical Format Unit
- Documentation Included

Ask about our 8-inch Drives & Software

MATCHLESS SYSTEMS

18444 S. Broadway
 Gardena, CA 90248
 (213) 327-1010

© 1980 Matchless Systems & MarketPlan

An electronic video worksheet.

The Graphics Coder

```

7 CLEAR
10 DIMC(200),D(200),S(200)
20 Y=15360:A=0:F=0
30 CLS
40 POKEY+A,45:B=A:B=A:PRINT@960,A;B;
50 AS=INKEY$
60 IFAS=""THENGOTO50ELSE200

100 F=F+1:C(F)=G:D(F)=Y+A:S(F)=A
110 CLS
120 FORBA=1TOF:POKE D(BA),C(BA)
130 NEXTBA
140 POKEY+A+1,45:A=A+1:GOSUB1000:PRINT@960,CHR$(30);:PRINT@960,A;
    B;:GOTO50
150 CLS:PRINT"THESE POKE LOCATIONS AND GRAPHIC CODES WERE USED:"
160 PRINTTAB(5)"POKE LOCATION";TAB(25)"GRAPHIC CODE";TAB(45)"PRINT
    LOCATION"
170 FORT=1TOF
180 PRINTTAB(10)D(T);TAB(30)C(T);TAB(50)S(T)
185 E=E+1:IFE=14THENINPUT"PRESS ENTER TO CONTINUE";B$:E=0
190 NEXTT:GOTO600

200 IFASC(AS)=9THENA=A+1:GOSUB1000:IFA>1023THENGOTO500ELSEPOKEY+A
    -1,32:POKEY+A,45:PRINT@960,CHR$(30);:PRINT@960,A;B;:GOTO50
210 IFASC(AS)=10THENA=A+64:GOSUB1000:IFA>1023THENGOTO500ELSEPOKEY
    +A-64,32:POKEY+A,45:PRINT@960,CHR$(30);:PRINT@960,A;B;:GOTO50
220 IFASC(AS)=91THENA=A-64:GOSUB1000:IFA<0THENGOTO500ELSEPOKEY+A+
    64,32:POKEY+A,45:PRINT@960,CHR$(30);:PRINT@960,A;B;:GOTO50
225 IFASC(AS)=68THENGOTO1700
230 IFASC(AS)=8THENA=A-1:GOSUB1000:IFA<0THENGOTO500ELSEPOKEY+A+1,
    32:POKEY+A,45:PRINT@960,CHR$(30);:PRINT@960,A;B;:GOTO50
235 IFASC(AS)=82THENGOTO1800
240 IFASC(AS)=32THENIFA>880THENPRINT@256,"";:INPUT"CODE";G:GOTO1
    500
250 IFASC(AS)=32THENPRINT@896,"";:INPUT"CODE";G:GOTO1500
260 IFASC(AS)=81THENGOTO150
270 GOTO50

500 CLS:PRINTCHR$(23):PRINT@512,"THAT POSITION IS NOT":PRINT"ON T
    HE SCREEN"
510 FORX=1TO1000:NEXTX:A=0:GOTO110

600 INPUT"DO YOU WISH TO DO MORE GRAPHICS";QS
610 ILEFT$(QS,1)="Y"THENGOTO650
620 STOP
650 INPUT"DO YOU WISH TO CLEAR THE RESIDENT GRAPHICS";QS
655 ILEFT$(QS,1)="Y"THENGOTO7
660 GOTO110

1000 B=A
1010 IFA>63THENH=INT(A/64):B=A-(64*H)
1020 RETURN

1500 FORT=1TOF
1510 IFD(T)=Y+ATHENGOTO1540
1520 NEXTT
1530 GOTO1000

1540 C(T)=G:CLS:GOTO120
1700 FORT=1TOF
1710 IFD(T)=Y+ATHENC(T)=32:GOTO110
1720 NEXTT
1730 GOTO110
1800 A=D(F)-Y
1810 IFA<0THENA=0
1820 CLS:GOTO120

```

Program Listing.

U. F. Racine
2520 S.E. Alexander Drive
Topeka, KS 66605

When programming on the TRS-80, I utilize graphics as often as possible.

However, when displaying an outline map of the U.S. or a Lunar Lander with string or POKE graphics, I am faced with the task of assembling strings or computing the proper POKE locations. Whenever I am working on a display, I find myself shuffling several pieces of paper, a video display worksheet, a scratch pad and a sheet with POKE locations.

Finally, I let my TRS-80 do the work for me. After all, that is what computers are designed to do!

I call the following program Graphics Coder. It's a video display worksheet. While it still requires a hand listing, unless you have a printer, it speeds up the development of graphic displays.

Cursor and Pseudo Cursor

The program uses the → and ← cursor keys and the upward linefeed ↑ and downward linefeed ↓ to position the pseudo cursor. When the program runs,

the pseudo cursor is initially located at the home position, 0,0. At the bottom of the screen, print location 960, the current print location and tab number of the pseudo cursor are displayed.

INKEY\$ directs the cursor and edit functions. When the appropriate arrow key is pressed, the cursor moves one print position left or right, up or down.

When the cursor is in the location where you wish to place a graphic character, depress the space bar. The program then prompts the user to enter the appropriate graphic code. For instance, if you enter 191, the entire graphic block at that print location is turned on.

While I wrote the program to accept code-based TRS-80 graphics, you can enter and display any ASCII code. Both text and graphics can be assembled.

The ASCII codes are found in section C/2 of the *TRS-80 Level II User's Manual*. If you are not familiar with TRS-80 graphics codes, refer to the book *Introduction to TRS-80 Graphics* by Don Inman (dilithium Press, 1979).

Conversion

You will need to convert from hexadecimal to decimal. Begin-

ning with the first character, number from 129 to 191. An alternative source of information can be found in William L. Colsher's article "Getting the Most out of Your TRS-80" in the July, 1979 issue of *Microcomputing*. The characters are printed, but in a much smaller version.

Once the code is entered, the program clears the screen and displays all the code stored to that point. The cursor is also moved one position to the right.

The program has two editing features. Firstly, if you enter the wrong code or want to change the code in a location, return the cursor to that location, press the space bar and enter the new code. The program changes the code for that location.

Secondly, if you wish to delete a character and not replace it with another code, return the cursor to that position and press the D key. The program substitutes a space for that code (CHR\$(32)).

After editing the display, reset

it by hitting the R key. This function clears the video display, prints all the characters stored and places the cursor one position to the right of the last print location containing a character.

At any point during the program run, the print locations, graphic or ACSII codes and tab locations can be displayed in blocks of 14 by pressing the Q key. It is then a simple matter either to write down the information or print it out.

After listing the display data currently stored, the program asks the user if he wishes to continue. If the input is yes, the user can retain the stored code or begin a new display.

The program can be modified to include the line number, if it is necessary:

```
20 Y= 15360: A=0: H=1
1010 IF A>63 THEN H=INT(A/64):
B=A-(64*H): H=H+1
```

Add H to the print statements in lines 40, 140, 200, 210, 220, and 230. The lines should read: PRINT@960,A;B;H;GOTO. ■

80TM microcomputing

BINDERS order yours today



Keep your library of 80 Microcomputing safe from loss or damage in these handsomely appointed binders with rich dark green covers and gold lettering. Each binder holds 12 issues making an EXCELLENT REFERENCE HANDBOOK. Several binders form a quality library you can be proud of.

\$7.50 each... 3 for \$21.75... 6 for \$42.00...

Postage paid in USA. Foreign orders please include \$2.50 for postage.

Send check or money order only to:
80 MICROCOMPUTING BINDERS
P.O. Box 5120, Phila., PA 19141

Allow 6-8 weeks for delivery.

Please no C.O.D. orders, no phone orders.

A.E.M. Computer Services Now Offers:

Osborne® Extended

Osborne Basic Accounting System integrated with invoicing, insurance, inventory, etc.

Installation & Training Manual

Pamela Donovan with her years of training experience guides you through this important phase \$20.00

Special Introductory Package for TRS 80 Model II ©

- CBASIC® Osborne® General Ledger
- CBASIC® Osborne® Accounts Payable Receivable
- CBASIC® A.E.M.'s Integrated Invoicing
- CBASIC® Osborne® Payroll
- Training Manual
- Demo Disc
- Accounting Manuals

all for \$850.00

uses lifeboat CP/M®

Osborne® Programs \$195.00/ea.
A.E.M.'s Integrated Invoicing \$250.00
CBASIC® - CP M® Together \$250.00
Accounting Manuals \$20.00/ea.



A.E.M. ✓ 368
2930 E. Northern Ave.
Phoenix, AZ 85028
Phone (602) 992-8382

AT LAST

WILL-O-SCREEN

The \$1.98 color display screen for your TRS-80® (model I or II)

If you spend any time at all in front of your video display, you need this wonderful attachment.

- reduces eye strain & fatigue
- decreases glare
- non-electronic
- removable
- adds "zip" to your graphics
- will not mar surface or void guarantee
- adds a "professional" look to your computer
- flips up
- mounts in seconds
- reduces screen contrast
- monitor controls unaffected
- no tools required
- money back guarantee

Your eyes are worth it!

- State color: red, gold, green, blue, amber
- \$1.98 each or all 5 colors for \$8.88

- Send check or M.O. to:



©Trademark of Radio Shack Div. of Tandy Corp.

QUALITY TRS-80 SOFTWARE

KEYWORD Indexing System

A series of programs that will create a data file on disc, build an index of all occurrences of "Keywords" in the text of the data file and allow inquiries or searches into the file using the indexed keywords. The system features:

- flexible record lengths with location pointers
- deletion of non keywords from index by system
- "and" "or" "not" logic for inquiries
- interface for user written inquiries

KEYWORD INDEX—2 disc 32K DOS system \$39.95

SORTS for HOME and BUSINESS

No computer user should be without a versatile, easy to use sort program. The Northeast Microware In memory sort programs are written in Level II BASIC and have the following features:

- Sort ALPHA or NUMERIC data
- Sort on up to 5 fields simultaneously
- In ascending or descending sequence
- Supports kb, video or tape I/O
- Supports seq. disk and printer I/O (SORT-IID)
- Supports user I/O routines
- User edits (SORT-IID only)

SORT-II—16K Level II in memory sort \$19.95
SORT-IID—32K DOS in memory sort \$29.95

FOR the SERIOUS GAMBLER

BLACKJACK SIMULATOR. Allows you to simulate the playing of thousands of hands of BJ and analyze the results on tape in Level II BASIC. \$19.95

Manuals for all programs available for \$3.00 ea. (price deductible on purchase of program)

"TRS-80 is a registered trademark of TANDY CORP."

Northeast MICROWARE

BOX 2133, ✓ 74
BOSTON, MA. 02106

DISASSEMBLED HANDBOOK FOR TRS-80

VOLUME 1—\$10. POSTPAID

Using ROM Calls in assembly language programming
Self-programmed learning course—10 Chapters
All BASIC ROM Calls—ROM ancillary functions
CINT, CSNG & CDBL arith/trig/log/etc. demo pgms

VOLUME 2—\$15. POSTPAID

Advanced assembly language course—13 Chapters
Storing video in MEM for later use & recall
Split-screen video with scroll/store/recall
Decoding single & double precision numbers

COMMENTS

COMPUTER INFORMATION EXCHANGE—ship 100 Vol. 2

George Blank—Vol. 1 good intro. to ROM CALLS
SOFTSIDE—will reprint 3000 copies of Vol. 1
Allan Moluf—I especially recommend this book
S-80 BULLETIN—A must for every 80 bookshelf
Charles Butler—most informative and accurate
INTERFACE—save you 1 year's assy. lang. study
Jon Kosloski—we sold over 500 first 30 days
THE ALTERNATE SOURCE—std. text for using ROM
Miller Microcomputing—ship us a carton ASAP
CHICATRUG—ship us another carton via Air Mail
Bill McLaughlin—ship another 300 air freight

RICH CRAFT ENGINEERING LTD. ✓276

Drawer 1065, Wahmeda Industrial Park
Chautauqua, New York 14722
phone (716) 753-2654 for COD orders

Ask Your Dealer For

ABACUS[®]
software ✓311

MAILLIST.....	29.95
TAPE COPY.....	19.80
TEXT EDITOR.....	69.95
INVENTORY.....	29.95
FILE SORTER.....	24.95
PROGRAM EDITOR.....	19.80
LOWER CASE KIT.....	24.95


Prices may vary with
dealers. For Catalog
write or call below:

P.O. Box 77
E. Greenbush, N.Y. 12061
checks, mastercharge, visa OK
(518) 477-8222




Dysan
CORPORATION

Solve your disc problems, buy 100% surface
tested Dysan diskettes. All orders shipped
from stock, within 24 hours. Call toll FREE
(800) 235-4137 for prices and information.
Visa and Master Card accepted. All orders
sent postage paid.



**PACIFIC
EXCHANGES**
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

✓370

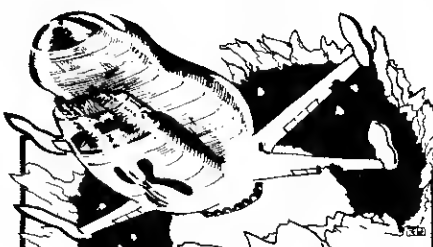

PARSECTOR V

BREAK THROUGH TO NEW DIMENSIONS
IN INTERGALACTIC WARFARE! \$19.95

- **UNIQUE DISPLAY** splitscreen gives each player a private display.
 - **INTELLIGENT OPPONENT** pits your skill against another human!!
 - **ACTION SOUNDS & GRAPHICS** explosions, weapons, etc.
 - **FLEET BATTLE CRAFT** they seek out & engage evil enemy patrols.
 - **CHALLENGING** conquering the galaxy requires bold strategy!
- TRS 80 L2 16K REQUIRED. For cassette and instructions send check or money order.
PO Box 560595
SYNERGISTIC SOLAR INC MIAMI FL 33156

✓225

SORTFILE, A PROFESSIONAL SORT . . .

- * BASIC program with assembler routines
- * Internal sort time of 4 seconds for 500 multi-keyed items
- * Any combination of data types and ascend-descend directions for keys
- * Six output options:
 - a) New data file
 - b) New data file with selected and/or rearranged data fields
 - c) Tag file (keys + record pointers)
 - d) Pointer file (record pointers only)
 - e) Data records displayed on screen
 - f) Data records printed on printer

* Runs with 1 disk and 16K memory

* Sorts files too large for memory

* Free "SEEFILE" utility included

. . . at a hobbyist price!

Diskette: \$23.95
Cassette: \$19.95
Documentation: \$3.00 (refundable)

✓399

SOFTWARE EFFICIENCY

7800 Stanford Ave. St. Louis, MO 63130

SOFTWARE for the TRS-80
Programs by TRS-80™ 16K Level II. Call. Residents add 6%.

SIGNING
Learn to talk with the hearing-impaired. Type in any phrase up to 1400 characters long. It then reads back one letter at a time, showing the hand positions for each letter. You have control over the speed, and whether or not the phrase shows on the screen. If up the letter being signed is highlighted. \$19.95


TIC-TAC-TOE-2.2
This game not only holds your interest, it won't give it back. Occasionally it makes a wrong move and you need to be ready. Set your own time limit for thinking, if you're too slow you will lose a turn. Game seldom plays same way twice. This combination makes it a challenging game. \$6.98

BANJO PLAYER 1.0
Learn to chord the banjo by placing your choice of 119 chords in any order, for any length of time. Up to as many as 250, play any song you want. A graphic banjo neck is displayed on your CRT showing how to play each chord, always in the correct order helping with the timing. \$14.95


FORM 007
This form is on clear plastic. It is a CRT worksheet that comes with in 1% of handling the 12" screen graphics. Find any location on the screen by: The set (x,y) Nos. The point (x,y) Nos. In hex or dec the POKE (x,y) and PEEK (x,y) Nos. Also on the side is a chart to define any combination of the six part block used in POKE-ing graphics. \$3.95

ENJOY COMPUTER PROGRAMS
P.O. BOX 1535
GOLETA, CA 93007
*TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

MicroMint presents COMM-80! The TRS-80 I/O solution.

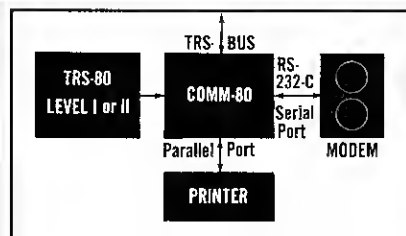

The COMM-80 is the only interface you need to turn your TRS-80 Level I or II into a timesharing terminal with provisions for a printer. The COMM-80 combines the most used features of the RS expansion interface in a low cost unit containing a built-in RS-232-C interface (50-19,200 baud software selectable), a full 8 bit parallel port (34 pin edge card Centronics compatible) and a TRS-BUS connector for future expansion. Up to 16 units can be chained together and addressed separately. Interface your TRS-80 to all standard RS-232-C devices including modems, CRT Terminals, printers and other computers. Smart terminal software (will run in 4K) is included at no extra cost.



COMM-80™

Assembled and tested . . . \$179.95

Includes case, power supply, ribbon cable, parallel printer port, serial port and TRS-BUS connector plus smart terminal software (please specify Level I or II).

NY residents add 7% sales tax.

As featured in:
"I/O Expansion for the TRS-80"
BYTE, June 1980


To order call (516) 374-6793
or write: The MicroMint Inc.

917 Midway
Woodmere, NY 11598

Dealer inquiries invited.

TRS-80 is trademark of Tandy Corp.

✓310

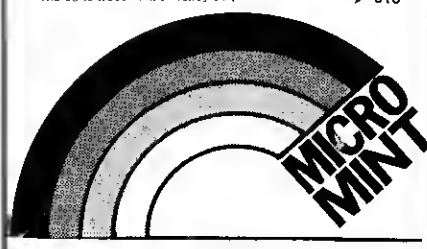

THE INTERFACE CONNECTION

Keep your files safe with this simple utility.

Disk File Protection

Dan Keen
and
Dave Dischert
RD 1, Box 432
State Highway 83
Cape May Court House, NJ
08210

One of the problems with TRSDOS version 2.1 is the frequent overwrite on disks. Radio Shack has since released a new version, 2.2, and this problem appears to be solved.

But for those very critical times when you want to leave nothing to chance, structure your programs around this control routine and put your mind at ease.

Using the Program

The routine uses a sequential file to tell the computer where to put the random file information. The sequential file keeps track of where the last random file data is where new material will be put on disk. There is never any overwrite.

First, let's define record and subrecord. A record is 256 bytes, one full buffer. A subrecord is a section of a record. Several subrecords make up a record. R percent is the variable used for the record number, and SR percent for the subrecord.

The number of subrecords per record is established in the fielding (line 40). Lines 60 and 120 must have proper values which match up with the number of subrecords.

In the control program, we have chosen five subrecords to fill up one record. Fielding is setup as usual, as described in the TRSDOS owners manual on page 7-72. Use PH\$ as PHONEY\$ to position the subrecord within the buffer. The manual calls it STARTHERE\$.

The array in line 60, A\$(4), holds the last subrecord data in the previous record. The number four would be changed if you use other than five subrecords. By the same token, IF SR%=5 in line 120 would also need modification.

The first thing the computer tries to do is input data from a nonexistent file (line 20). The ONERROR routine sends execution to 1000 where the file is created. RUN terminates the er-

ror and it will not occur again. RESUME is not needed. Line 30 keeps the machine on the lookout for usual blunders.

An error would occur in line 60, if the program were allowed to get there. (Line 60 tries to get record number 0, which is not a legal record number.) But line 50 sees that this won't happen.

The last of the data entered are retrieved in either 60 or 70, depending on the values of the record and subrecords. The subrecord numbers and record number, if need be, are incremented in line 120. Information is then put in the proper random file. The new R percent and SR percent values are stored in line 150.

In Conclusion

It's easy to make errors when incorporating this routine into your programs. If trouble occurs, check the values in lines 40, 60 and 120.

The DISKDUMP/BAS utility provided on the TRSDOS disk is a powerful aid in debugging this type of program. With DISKDUMP you can see exactly what went on the disk, and determine if the problem lies in the writing or reading section of your program. ■

```

0 CLEAR200
5 REM * TEST PROGRAM FOR USING SEQUENTIAL AND RANDOM FILES
10 ONERRORGOTO1000
20 OPEN "I", 2, "INDEX": INPUT#2, R%, SR%: CLOSE
30 ONERRORGOTO0
40 OPEN "R", 1, "FILENAME": FORK=0T04: FIELD1, X*50 AS PH$(X), 50
   AS A$(X): NEXT
50 IF (SR%=0) AND (R%=1) GOTO100
60 IF SKN=10 THEN GET1, R%-1: B$=A$(4): GOTO80
70 GET1, R%: B$=A$(SR%-1)
80 PRINT "B$="; B$
90 PRINT "LAST RECORD WAS #"; R%-1: PRINT "LAST SUB REC WAS #";
   SR%
100 INPUT "ENTER NEW WORD"; B$
110 LSET A$(SR%)=B$
120 SR%=SR%+1: IF SR%=5 THEN SR%=0: PUT1, R%: R%=R%+1: GOTO150
140 PUT1, R%
150 OPEN "O", 2, "INDEX": PRINT#2, R%, SR%: CLOSE: END
1000 R%=1: SR%=0: OPEN "O", 2, "INDEX": PRINT#2, R%, SR%: CLOSE: RUN
  
```

Program Listing.



INTEGRATED **KEYPLUS** UTILITY PACKAGE

Keyplus is a collection of utilities that can be enabled directly from the keyboard of a Level II TRS-80. Seven different keyboard entry modes include BASIC shorthand (2 modes), direct graphic character input (3 modes), typewriter style input and standard TRS-80 entry.

Keyplus supports auto-repeat, lowercase video (optional hardware modification required), restoration of lost programs, keyboard debounce, single key stroke user definable strings and more!

Designed for ease of use, Keyplus routines may be enabled or disabled in two key strokes.

The Level II version of Keyplus is available for \$14.95 and a more powerful disk version (32 or 48K) sells for \$19.95. Pennsylvania residents add 6% sales tax.

TRS-80 is a registered trademark of TANDY CORP.



SJW, INC.

P.O. BOX 438 ✓ 244

HUNTINGDON VALLEY,

PA 19006

215-947-2057



TRS-80 LEVEL II \$685.

COMPLETE SYSTEM
Limited quantity in stock


The world's most popular microcomputer, with 16K of memory and Level II BASIC for only \$685.00 complete with full 90-day Radio Shack warranty.

We accept check, money order or phone orders with Visa or Master Charge. (Shipping costs added to charge orders).

Disk drives, printers, peripherals, software & games... you name it, we've got it (both Radio Shack & other brands). Write or call for our complete price list.



**ELECTRONICS
MART, LTD.**

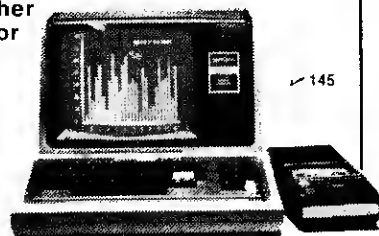

✓ 145

AUTHORIZED
DEALERSHIP

Radio Shack®

32 EAST MAIN • MILAN, MICHIGAN 48160 • (313) 439-1508

The DATA-TRANS 1000

A completely refurbished
IBM Selectric Terminal with
built-in **ASCII** Interface.

***FOR YOUR TRS-80 WITH OR WITHOUT
EXPANSION INTERFACE.**

Features:

- 300 Baud
- 14.9 characters per second printout
- Reliable heavy duty Selectric mechanism
- RS-232C Interface
- Documentation included
- 60 day warranty - parts and labor
- High quality Selectric printing
- Off-line use as typewriter
- Optional tractor feed available
- 15 inch carriage width

Also works with Exatron's Stringy Floppy, for fast loading of programs.

HOW TO ORDER DATA-TRANS 1000

1. We accept Visa, Master Charge. Make cashiers checks or personal check payable to:

DATA-TRANS

2. All orders are shipped

F.O.B. San Jose, CA

3. Deliveries are immediate



Desk and table top models also available.

For orders and information

DATA-TRANS

2154 O'Toole St. ✓ 274

Unit E

San Jose, CA 95131

Phone: (408) 263-9246

See how your 80 sorts data, graphically.

Graphic Sort

C. A. de Zoysa
P.O. Box 170
Keyport, NJ 07735

carried out its process of sorting. It occurred to me to write a simple program which would graphically demonstrate the sorting process on the video display terminal.

The sort technique I have used is one that most beginners go through. Although it is not the most efficient method of sorting, it adapted itself very well to graphic display.

The BASIC Sort

The program was written for a TRS-80 Level II. The data statement is restricted to eight items, which eliminates the need for DIMensioning and permits the data to be displayed in single lines.

Only one subscripted variable is used. Other variables have been kept to a minimum.

The program should run on most microcomputers with little or no program modification provided the video display terminal

can handle 64 characters per line.

The graphics display program listed (see Program Listing 1)

Using a lot of paper, arranging and rearranging arrays and subscripted variables, I was helping a friend learn about computer sort methods. Through this maze of subscripted variables we managed to get an idea of how the computer

A —Array element
I —Dummy variable for keyboard input
L —Flag to check if switch takes place
J —Subscript—inner loop
N —1. Subscript during read
—2. Subscript—outer loop
T —Variable for temporary storage during switches
Q —1. Tab counter when printing headings
—2. Line counter during output
X —1. Array element indicator when printing headings
—2. Array subscript during output

Table 1. List of Variables.

```
10 FOR N = 1 TO 8
20 READ A(N)
30 NEXT N
40 DATA 254,-12,101,567,45,0.123,33,309
50 CLS : PRINT "ORIGINAL ORDER: "; : GOSUB 260
60 PRINT : PRINT : GOSUB 360
70 PRINT : Q = 0
80 FOR N = 1 TO 8
90 FOR J = 1 TO 7
100 IF A(J) < A(J+1) THEN 150
110 T = A(J)
120 A(J) = A(J+1)
130 A(J+1) = T
140 L = 1
150 GOSUB 250
160 PRINT
170 NEXT J
180 NEXT N
190 PRINT "END SORT"
200 PRINT : PRINT "SORTED ORDER: "; : GOSUB 260
210 PRINT : PRINT
220 INPUT "HIT ENTER TO REPEAT"; I
230 RESTORE : GOTO 10
240 END
250 PRINT TAB(1) N; TAB(5) J;
260 FOR X = 1 TO 8
270 PRINT TAB(13) A(X);;
280 NEXT X
290 IF L = 1 PRINT TAB(55) J; TAB(60) J+1; : L = 0
300 Q = Q + 1
310 IF Q > 8 THEN 330
320 RETURN
330 PRINT : INPUT "HIT ENTER TO CONTINUE"; I
340 CLS : GOSUB 360
350 Q = 0 : RETURN
360 REM PRINT HEADINGS
370 PRINT TAB(3)"LOOP"; TAB(29)"ARRAY"; TAB(55)"ELEMENT
S"
380 PRINT "SUBSCRIPTS"; TAB(28)"ELEMENTS"; TAB(55)"SWIT
CHED"
390 PRINT TAB(2)"N"; TAB(6)"J";
400 Q = 0
410 FOR X = 1 TO 8
420 PRINT TAB(Q+13) X;
430 Q = Q + 5
440 NEXT X
450 PRINT
460 RETURN
```

Program Listing 1.

NEW

DISC DRIVES FOR TRS-80* "FLIPPY"—250K bytes/disc FAST—5ms Track to Track Access



REAL VALUE

AEROCOMP offers the best value in microcomputer disc drives on the market today! Reliability, features and cost tough to beat. We deliver...and we stand behind our products, as evidenced by the only FREE TRIAL OFFER in the industry. Examine your systems needs and order today!

MYSTERY REMOVED

There appears to be some confusion in the terminology used to describe disc drives and their features. Here's what we mean:

- *FLIPPY** Allows the use of both sides of a diskette with a single-headed drive by simply turning the diskette over (Model 40-1), specified in tracks per inch (TPI).
- *TRACK DENSITY** Refers to the number of tracks per radial inch on the diskette. Typically 48 TPI=40 usable tracks and 96 TPI=80 useable tracks.
- *DOUBLE DENSITY** refers to recording density in bits per inch (bpi). Typically single density means data can be recorded up to 2,938 bpi; double density means data can be recorded up to 5,876 bpi.

*DOUBLE-SIDED

refers to number of read/write heads. Single-sided is one head, read/write one side only; double-sided is dual heads allowing read/write operations on both sides of the diskette. A double sided drive appears as two separate drives to the controller.

*CAPACITY

the total amount of storage space available on a diskette. Typically 125K bytes on a 40 track 5.25in. diskette. Formatted capacity is the total usable storage space on a diskette. Typically 102K bytes on a 40 track 5.25in. diskette.

*ACCESS TIME

the time required for the head to move from one track to the next. Typically 5 to 40 milliseconds (ms).

FREE TRIAL OFFER

Order your AEROCOMP Disc Drive and use it with your system for up to 14 days. If you are not satisfied for ANY REASON (except misuse or improper handling), return it, packed in the original shipping container, for a FULL REFUND. We have complete confidence in our products and we know you will be satisfied! ORDER TODAY!

WARRANTY

We offer you a 90 day unconditional warranty on parts and labor against any defect in materials and workmanship. In the event service, for any reason, becomes necessary, our service department is fast, friendly and cooperative.

100% TESTED

AEROCOMP Disc Drives are completely assembled at the factory and ready to plug in when you receive them. Each drive is 100% bench tested prior to shipment. We even enclose a copy of the test checklist, signed by the test technician, with every drive. AEROCOMP MEANS RELIABILITY!

ORDER NOW

- MODEL 40-1 DISC DRIVE \$339.95ea.**
Single-sided, "Flippy", 48TPI.
(40 track; single density unformatted 125K bytes/side; double density unformatted 250K bytes/side).
- MODEL 80-2 DISC DRIVE \$439.95ea.**
Double-sided, 48TPI.
(80 track/40 per side; single density unformatted 250K bytes; double density unformatted 500K bytes).

MODEL 80-1 DISC DRIVE \$439.95ea.

Single-sided, "Flippy", 96TPI.
(80 track; single density unformatted 250K bytes/side; double density unformatted 500K bytes/side).

MODEL 160-2 DISC DRIVE \$595.95ea.

Double-sided, 96TPI.
(160 track/80 per side; single density unformatted 500K bytes; double density unformatted 1 megabyte).

All models are capable of single or double density and are complete with power supply and silver enclosure. Send for information on AEROCOMP 2- and 3-drive systems available in 40 and 80 track.

SELECT EITHER A 2-DRIVE OR 4-DRIVE CABLE FOR USE WITH YOUR DRIVE(S):

2-DRIVE CABLE (for use with 1- or 2-drive systems) **\$24.95ea.**

4-DRIVE CABLE (for use with 1-, 2-, 3- or 4-drive systems) **\$34.95ea.**

Add \$1.25 shipping and handling

MINI DISKETTES (5.25 in), Box of 10 **\$29.95**
add \$1.25 shipping and handling

DISC OPERATING SYSTEMS

NEWDOS+(40 TRACK) \$109.00
NEWDOS/80 (80 TRACK) \$149.00

SPECIAL COMBINATION OFFER

Model 40-1 Disc Drive \$339.95
2-Drive Cable 24.95
Disc Operating System (NEWDOS+) 109.00

Reg. **\$473.90**
Special **\$399.95**

SPECIAL OFFER AS ABOVE EXCEPT WITH NEWDOS/80

Reg. **\$513.90**
Special **\$429.95**

Free Freight with Specials

To order by mail, specify Model Number(s) of Drive, cable, etc. (above), enclose check, money order, VISA or MASTERCARD card number and expiration date, or request COD shipment. Texas residents add 5% sales tax. add \$4.00 per drive for shipping and handling. Please allow 2 weeks for personal checks to clear our bank. No personal checks will be accepted on COD shipments-cash, money orders or certified checks only. You will receive a card showing the exact COD amount before your shipment arrives. Be sure to include your name and shipping address. **WE SHIP PROMPTLY!** In the event there is a slight delay, you will be notified of the shipping date and we will NOT deposit your money order or charge your bankcard until the day we ship!

FOR FAST SERVICE ON VISA/MASTERCARD or COD ORDERS CALL TOLL FREE NOW!
(800) 824-7888, ASK FOR OPERATOR 24.
In California dial (800) 852-7777, Operator 24. In Alaska and Hawaii dial (800) 824-7919, Operator 24.
TOLL FREE LINES WILL ACCEPT ORDER ONLY!

For Applications and Technical information, call (214) 337-4346 or drop us a card.

COMPARE AND BUY AEROCOMP!

	"FLIPPY"	ACCESS TIME (track to track)	HEAD LOAD SOLENOID	DISC EJECTOR	CAPACITY (unformatted single density)	EASY- ENTRY DOOR	FREE TRIAL
AEROCOMP	YES	3ms.	YES	YES	250K bytes (both sides)	YES	YES
RADIO SHACK*	NO	40ms.	YES	NO	109K bytes	NO	NO
PERCOM	YES	25ms.	YES	NO	250K bytes (both sides)	YES	NO
MPI	NO	5ms.	YES	YES	125K bytes	YES	NO
SHUGART	NO	40ms.	YES	NO	109K bytes	NO	NO
SIEMENS	NO	25ms.	YES	NO	125K bytes	YES	NO
TANDON	NO	5ms.	NO	NO	125K bytes	NO	NO
PERTEC	YES	25ms	YES	NO	250K bytes (both sides)	NO	NO
BASF	NO	12ms.	YES	NO	125K bytes	NO	NO

Factual material from current manufacturer's data sheets is believed reliable but cannot be guaranteed, comparing Aerocomp Model 40-1 to similar models

The TRS-80* expansion interface limits the track to track access time to 12ms.

*Trademark of Tandy Radio Shack.

AEROCOMP, INC. ✓ 387
Redbird Airport, Bldg. 8
P.O. Box 24829
Dallas, TX 75224

MARK GORDON COMPUTERS

DIVISION OF MARK GORDON ASSOCIATES, INC. ✓270
15 KENWOOD ST., CAMBRIDGE, MASSACHUSETTS 02139
(617) 242-2749 (617) 491-7505

COMPUTERS

Level-II 4K System.....	\$29.00
Level-II 16K System.....	\$59.00
Model-II 64K System.....	\$349.00

DISK DRIVES

40 Track 5 1/4 inch drive.....	\$19.00
77 Track 5 1/4 inch drive.....	\$49.00
4 Disk Drive Cable.....	\$39.00

PRINTERS

Centronics 730.....	\$99.00
Centronics 779-2.....	\$99.00
Comprint 912p.....	\$59.00
Integral Data 440G.....	\$99.00
NEC 5510 w-tractor.....	\$269.00
TI 810 Basic.....	\$189.00

MISC HARDWARE

Expansion int. TRS-80(Ok).....	\$249.00
Novation Cat modem.....	\$159.00
16K Memory Kit.....	\$49.00
Leedex Monitor.....	\$109.00
Printer Cable for above.....	\$49.00
ISO-2 Isolator.....	\$54.00
AC LINE FILTER.....	\$24.00

STORAGE MEDIA

Verbatim-box 10-5 1/4.....	\$25.00
Memorex-box 10-5 1/4.....	\$22.00
Plastic Storage Box.....	\$5.00

OPERATING SYSTEMS

NEWDOS by APPARAT INC.....	\$49.00
NEWDOS+ by APPARAT INC.....	\$99.00
MMS FORTH DISKETTE-PRIMER.....	\$64.95

DISKETTE TRS-80* BUSINESS SOFTWARE BY SBSG

Free enhancements and upgrades to registered owners for the cost of media and mailing. 30 day free telephone support. User reference on request.

Fully Interactive Accounting Package, General Ledger, Accounts Payable, Accounts Receivable and Payroll, Report Generating.

Complete Package (requires 3 or 4 drives)	\$475.00
Individual Modules (requires 2 or 3 drives)	\$125.00
Inventory II: (requires 2 or 3 drives)	\$ 99.00

Mailing List Name & Address II
(requires 2 drives) **\$129.00**

Intelligent Terminal System ST-80 III: **\$150.00**

The Electric Pencil from Michael Shrayor **\$150.00**

File Management System: **\$ 49.00**

FINE PRINT

TRS-80 is a Tandy Corporation trademark. Use of above operating systems may require the use of Radio Shack TRS-DOS. Radio Shack equipment subject to the will and whim of Radio Shack.

ORDERING INFORMATION

We accept Visa and Mastercharge. We will ship C.O.D. certified check or money orders only. All orders must include 4 percent for shipping and handling. Massachusetts residents add 5 percent sales tax.

The Company cannot be liable for pictorial or typographical inaccuracies.

is HARD COPY STORAGE a problem?




The year's half over and your copies of 80 Microcomputing are still lying around in messy piles or worse! Straighten out the situation with 80 Microcomputing Library Shelf Boxes... sturdy, corrugated, white, dirt-resistant boxes will keep your issues of 80 Microcomputing orderly and available for constant reference. Self-sticking labels are available for the boxes, too, not only for 80 but also for Kilobaud/ Microcomputing, 73 Magazine, CQ, QST, Ham Radio, Personal Computing, Interface Age, Byte and Radio Electronics. Ask for whichever labels you want with your box order. Each box holds a full year of the above magazines. Your magazine library is your prime reference. Keep it handy and keep it neat with these strong library shelf boxes. One box (BX1000) is \$2.00, 2-7 boxes (BX1001) are \$1.50 each, and 8 or more boxes (BX1002) are \$1.25 each. Be sure to specify which labels we should send. Shipping and handling charges are \$1.00 per order. Call in your credit card orders on our toll free line 800-258-5473, or use the order card in the back of the magazine and mail to:

80 microcomputing T.M. Peterborough,
NH 03458

Please allow 4-6 weeks for delivery. No COD orders accepted

CAN 20% BE WRONG?

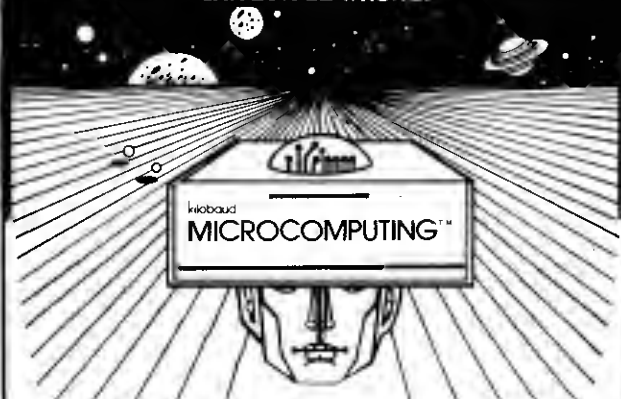

A recent survey showed that 20% of the 73 subscribers also read Kilobaud MICROCOMPUTING magazine... and enjoy it. This is the best way to learn and keep up with the rapidly developing world of microcomputers. There's nothing to be afraid of, you just have to read an interesting magazine and you'll learn. Try a subscription to Kilobaud MICROCOMPUTING and see for yourself.

- ☐ New subscription ☐ Renewal ☐ 12 issues for \$25.00
☐ Payment enclosed \$ ☐ 24 issues for \$38.00
☐ VISA ☐ MC ☐ AE ☐ Bill me ☐ 36 issues for \$53.00

Card # _____ Interbank # _____

Signature _____ Exp. date _____

Name _____

Address _____

City _____ State _____ Zip _____

—for even faster ordering service call toll free (800) 258-5473

Canadian: \$27, one year only, U.S. funds. Other foreign:
\$35, one year only, U.S. funds. Please allow 6-8 weeks for
delivery. **308B6**

MICROCOMPUTING • POB 997 • Farmingdale NY 11737

sorts a group of eight numbers in ascending order. Both decimal and negative numbers have been included in the data for a more vivid demonstration.

To sort in descending order, change the < sign in line 100 to >.

The program uses two nested FOR-NEXT loops. As the loops are executing, their subscripts, N for the outer loop and J for the inner loop, are displayed at the left of the screen. After each iteration, the array is displayed in the center of the screen.

If two elements are switched, their subscripts are displayed at the right, so you will know when a comparison has caused a change in the position of array elements. Hitting ENTER keeps the program executing.

Two Subroutines

The sorting process is carried out by lines 80 to 180. Two subroutines are used. One prints the headings and the other dis-

plays the array and subscripts after each iteration. Table 1 lists all the variables and their functions.

You may substitute your own data in line 40, but the number of items should be restricted to eight. Each item should be no longer than four places including signs and decimal points. PRINT statements should be entered exactly as listed for properly spaced output. Note that some PRINT statements have two semicolons at the end. These are necessary.

After you have studied the operation of the program, its efficiency may be improved by inserting the following program lines:

```
85 C = 0
135 C = 1
175 IF C = 0 THEN 190
```

These lines prevent further loop iterations after the desired sort. ■

SOFTWARE WANTED

If you are an
inventive programmer
and could use
an extra income,
please call:
(213) 894-9154

We are interested in
Games and Business software.

Royalty or Cash-out basis.

DATASOFT ✓ 407
16606 Schoenborn St.
Sepulveda, Ca. 91343

INTERFACE EXPANSION BOARD

For the TRS 80

MD
MICRO-DESIGN



The Interface Expansion Board gives your computer these features:

32 K Memory PC Board & user manual
Real-Time Clock INTRODUCTORY OFFER
Parallel Port
RS-232 Port
2K E-Prom Option
Phone Modem
Dual Cassette Line
On Board Supply
Silk Screen
Solder Mask
Expansion Port
Manual

59.95

Add 3.00 for shipping & handling. Texas residents add 5% sales tax.

FREE PAMPHLET AVAILABLE
Call or write



MICRO-DESIGN
P.O. Box 18054
Austin, Texas 78760
1-512-458-2937



Expire Date _____ Card # _____
Signature _____

TRS 80 is a Trademark of Tandy Corp.

TRS-80

HELP ?

"...how did I get along without it?" is the usual reaction to this advanced disk indexing program.

- AUTOMATICALLY create, sort, print, search a Master Index of all disk files.
- AUTOMATICALLY read file names, disk numbers (no hand entry).
- AUTOMATICALLY print disk labels (optional).
- AUTOMATICALLY update Index from revised disks.
- AUTOMATICALLY add optional file descriptions.
- AUTOMATICALLY label disks as 'DOS' or 'DATA', NEW
- AUTOMATICALLY purge disks of unwanted files. NEW

• **FINDISK-II** (on disk or tape 32K min — now works with RS 1-c mod) \$20.00

Other powerful programs from Documan available on tape or disk:

- **STRUCT-I** beam design and moment transfer w/ graphics (16K) \$15.00
- **SOLAR-I** essential calculations for passive solar design (32K) \$30.00
- **RIA-I** complex analysis of real estate investments (32K) \$30.00
- **DEPRECIATE-I** calculate, print 12 facts on depreciable items (32K) \$15.00

✓ 88 **VISA / MASTER CHARGE** Shipping \$1.00 each (Mich. add sales tax)

DOCUMAN SOFTWARE BOX 387-A KALAMAZOO, MI 49005 (616) 344-0805

'KGS-80'



KOGYOSHA

A TRS-80 WORD PROCESSING SYSTEM FOR LESS THAN \$600

(If you own IBM Selectric or equivalent.)

Turn your typewriter and TRS-80 into a new word processing system with a new device, the "KGS-80".

- Plug in compatible with TRS-80.
- No mechanical modification to the typewriter.
- Can be installed in 5 seconds.
- Software, a versatile Simple Letterwriter, included.

179 Riveredge Rd. Tenafly NJ 07670 (201) 569-8769 ✓ 149
DEALER INQUIRIES INVITED

I love my serial interface.

Pencil RS232 Driver

Dick Kinsey
5754 Thompson Rd.
DeWitt, NY 13214

The Electric Pencil by Michael Shrayder was intended to be used with either one of two printer interface options: the Radio Shack expansion interface with a parallel printer or the Small Systems Hardware TRS232 serial printer interface.

Unfortunately, it does not support a conventional RS-232-C interface.

If this presents a problem, you can solve it in one of three ways: Buy the disk version of the Electric Pencil (\$150), as it supports an RS-232-C interface and is also usable on a cassette-only system, buy a Small Systems Hardware TRS232 board (\$50) to use in place of your RS-232-C interface; or, modify the cassette Pencil (\$0). I chose the last approach.

Software Modification

The Electric Pencil loads into

low memory and clears it from address 21224 to the top of your memory. Any I/O driver program previously loaded in high memory is thereby erased.

To protect the driver software required by an RS-232-C, I changed the Pencil program so that it fetches the memory size from reserved RAM and clears memory only to this point. It is written as a subroutine which is called from the two places in the program that do a clearing operation. The coding for this portion of the software change can be seen in Table 1.

All that remains is to connect the driver program you previously loaded into high memory. Table 2 gives the coding for this patch.

The patch is general, so you can specify any memory size you desire and locate your driver

program anywhere in the now protected high memory area.

For anyone who recently increased memory to 32K, to POKE or PEEK an address above 32767, use desired address - 65536 and not the formula given in the *Radio Shack Level II Reference Manual*.

BASIC Changes

If you don't have a monitor program that locates in high memory, you will have to make the Electric Pencil software changes described above using the POKE command. I have written two BASIC programs to accomplish this painlessly.

Running the first CLOAD relocates the pointers for BASIC source statements just above the area of memory that Electric Pencil occupies. PENCIL is then loaded under SYSTEM, and the

Address	Mnemonic	Comment
17270	CALL 21149	;the location of the new subroutine
17273	NOP	;a byte no longer used
20095	CALL 21149	
20098	NOP	
21149	PUSH BC	;save all necessary
21150	PUSH DE	;registers
21151	PUSH HL	;HL contains file space start address
21152	PUSH HL	;and (HL) = 0
21153	POP DE	;store HL in the DE register
21154	LD HL,(16561)	;fetch specified memory size and
21157	SBC HL,DE	;subtract to determine number of
21159	PUSH HL	;bytes available for file space
21160	POP BC	;store in BC register
21161	POP HL	;restore file space start address
21162	INC DE	;DE = HL + 1
21163	LDIR	;clear out file space
21165	POP DE	;restore the DE and
21166	POP BC	;BC registers
21167	RET	;return to caller

Table 1.

Address	Mnemonic	Comment
21136	PUSH BC	;save registers that
21137	PUSH HL	;will be used
21138	LD C,A	;transfer character to be printed
21139	LD HL,(16422)	;fetch the driver address from reserved RAM
21142	CALL 21148	;places program counter on stack to
		provide return address
21145	POP HL	;restore the HL and
21146	POP BC	;BC registers
21147	RET	;return to caller
21148	JP(HL)	;jumps to driver program

Table 2.

Games from **BIG FIVE** will
turn your computer into a

TRS-80 HOME ARCADE

SUPER NOVA®

\$14.95, 16K
Level I or II



"Huge ASTEROIDS have invaded the galaxy! Your mission is to destroy them and the alien saucers before they destroy you!"



METEOR MISSION®

\$9.95, 4K
Level I or II

"The second Big Bang has occurred and the galaxy is full of stray meteors. Can you survive to dock your ship with the space station?"

"*Super Nova* is the best TRS-80 game on the market!"

"It's more fun playing **SUPER NOVA** at home than wasting quarters at an arcade!"

"My high score is 62,000, but I'm working on topping 100!"

BIG FIVE SOFTWARE CO.

P.O. Box 9078-185 ✓ 357
Van Nuys, CA 91409

© 1980 by Bill Hogue
TRS-80 is a trademark of Tandy Corp.
Calif. Res. add 6% tax, UPS/C.O.D. add \$3.00

PRINTERS & CRT'S From Orange Micro ✓ 296



base 2 inc.

IMPACT PRINTER



\$649.00

"The base 2 outperforms every printer in its price range. Do a comparison and see for yourself..."

★ GRAPHICS ★ TRACTORS / FRICTION FEED

• 2K Input Buffer • RS-232 Serial, Centronics® Parallel, IEEE-488, 20 ma • TRS-80 Cable option • 60 LPM - 100 CPS • Fast form feed • User programmable character set • 64, 72, 80, 96, 120, 132 Columns / line • Expanded characters • 9.5" wide paper • Automatic skip-over-perforation • Horizontal & Vertical tabs • Programmable vertical line spacing • Intel 8085 Microprocessor — over 40 software commands • Self test • 15 Baud rates to 9600 Baud • Optional foreign character sets

Interfaces to TRS-80, Apple, Atari, PET, Northstar, and most other computers.



TELEVIDEO CRT'S PRICES SLASHED!

912C \$ CALL
920C \$ CALL

PRINTERS

AXIOM		OKIDATA	
IMP-1	629	Microline 80	659
IMP-2	715	w/tractors	779
Other models	\$ Call		
CENTRONICS		PAPER TIGER	
779 w/tractors	1059	IOS 440	869
730	\$ Call	w/graphics	959
737	\$ Call		
COMPRINT		QUME	
912 Parallel	499	Letter Quality 5/45	2499
912 Serial	535	w/tractors	2684

TOLL FREE (800) 854-8275

CALIF. ONLY (714) 630-3322

Call for FREE CATALOG

Phone orders WELCOME. Same day shipment for VISA, MASTER CHARGE, and AMERICAN EXPRESS. Personal checks require 2 weeks to clear. Add 3% for shipping and handling. California residents add 6%. Manufacturer's warranty included. Prices subject to revision.

Orange
Micro

P.O. Box 2076
Yorba Linda, CA 92688

**BEST SELLING INFORMATION
MANAGEMENT SYSTEM IN
MICROS TODAY!!**

SELECTOR III-C2

- Powerful
- Creates and Maintains Multi-key data bases.
- Prints **FORMATED, SORTED REPORTS** with numerical summaries.
- Source code supplied
- Prints **MAILING LABELS** — and more!
- Comes with **APPLICATIONS PROGRAMS** including:
 - Sales Activity
 - Inventory
 - Payables
 - Receivables
 - NAD
 - Expense Register
 - Checks Register
 - Client/Patient Record
 - Appointments
 - Library

File management and report writing modules contain linkage to user subroutines to add virtually any special purpose application.

STATE OF THE ART in information management systems!

NEW — "Ready-to-run" version for the TRS-80® Model I, only from Business Microproducts. Also available for Model II.

Requires CP/M operating system or derivative and CBASIC2.

Offered on 5 1/4" or 8" all versions... **\$295.***
CBASIC2 with Selector Purchase... **\$75.***

TRS80S → CP/M

FILE TRAN

"BRIDGES THE GAP"

- Machine language **COM** FILE directly compatible with your CP/M system
- Automated Terminal Configurator
- Memory displayed in both **HEX** and **ASCII**
- Any disk Sector-Selected and displayed in both **HEX** and **ASCII**
- Transfers both data and program files by file name byte by byte
- And more
- Newly created files scanned for potential errors between level II **BASIC** & **MBASIC** 5.0 or later
- CP/M files scanned for any selected string
- Searches any program for all occurrences of any string
- Generates a variable cross reference invaluable feature for any system level conversion and debugging
- Displays both **CP/M** & **TRS80S** directories

FILETRAN Disk and Manual **\$99**
Manual alone (manual price credited to system) **\$20**

ORDER NOW

BUSINESS MICROPRODUCTS ✓382

A DIVISION OF THE READY CORPORATION
LIVERMORE FINANCIAL CENTER
1838 Catalina Court • Livermore, CA 94550
(415) 449-4412

VISA _____ M/C _____

**NEVADA
COBOL**

- ✓ A **POWERFUL** subset of ANSI-74
- ✓ A **PRICE** that is **UNBEATABLE**—\$99.
- ✓ **EXTENDED** arithmetic & I/O features.
- ✓ **FAST** compilation and execution
- ✓ **EASY** to use — Generates small executable object modules
- ✓ **UNIQUE** — Easily understood error messages
- ✓ **CP/M** compatible
- ✓ Also available **ON TRS-80**
- ✓ **REQUIRES** only **16K-RAM**
- ✓ Designed for **PORTABILITY**

STANDARD FEATURES

- Random access file structure
- Sequential files — Fixed and variable length
- Debugging capability
- Copy statement
- Data types & character string, 16 Bit Binary and packed decimal (Comp-3)
- 18-Digit accuracy
- Hexidecimal non-numeric literals
- Powerful editing
- Interactive accept/display

Offered on both 5 1/4" and 8" diskette, all versions... **\$99***

*CA residents add 6% sales tax. Inter-continental shipping \$3.00 Allow 2 weeks delivery

TRS-80 is a trademark of the Tandy Corp
CP/M is a trademark of Digital Research

**SAVE
TRS-80's**



TRS-80's

DISCOUNTS of 10%, 15% and More available.

WE PAY Domestic U.P.S. shipping and insurance on minimum orders.

NO TAXES are collected on out-of-state shipments.

TOLL FREE Order Number 800/531-7466.

OPEN 8:00 a.m. to 6:00 p.m., Central Time, Monday through Friday;
9:00 a.m. to 6:00 p.m., Saturday.

**Pan American Electronics
Incorporated**

A Radio Shack

AUTHORIZED SALES CENTER

1117 CONWAY MISSION, TEXAS 78572

TOLL FREE ORDER NUMBER 800/531-7466

TEXAS AND PRINCIPAL TELEPHONE NUMBER 512/581-2765



break key is used to CLOAD the second program, the one that POKes the software changes.

The modified Electric Pencil is then run, using SYSTEM and entering /17232 in response to

the prompt (*?). In the course of clearing out the file space, it erases the now useless BASIC program. The instructions for this are displayed by the BASIC programs. ■

```
10 CLS
20 PRINT @:385;"1. LOAD 'PENCIL' USING 'SYSTEM' - TAKES ABOUT 75
SECONDS"
30 PRINT @:513;"2. HIT BREAK KEY AND 'CLOAD' THE SOFTWARE PATCH"
40 PRINT @:900;"
50 POKE 16633,2:POKE 16634,84:POKE 16548,0:POKE 16549,84
60 POKE 21503,0:END
```

Program Listing 1.

```
10 FOR X = 21136 TO 21148
20 READ Y:POKE X,Y:NEXT
30 FOR X = 17270 TO 17273
40 READ Y:POKE X,Y:NEXT
50 FOR X = 20095 TO 20098
60 READ Y:POKE X,Y:NEXT
70 FOR X = 21149 TO 21167
80 READ Y:POKE X,Y:NEXT
90 CLS:PRINT @:449;"3. ENTER /17232 UNDER 'SYSTEM'"
100 PRINT @:900;"":END
110 DATA 197,229,79,42,38,64,205,156,82,225,193,201,233
120 DATA 205,157,82,0
130 DATA 205,157,82,0
140 DATA 197,213,229,229,209,42,177,64,237,82,229,193
150 DATA 225,19,237,176,209,193,201
```

Program Listing 2.

"TRS-80 is a registered trademark of TANDY CORP."

Call about our fantastic price on
4-drive complete system.

Level II 4K	\$557.10
Level II 16K	\$720.00
Expansion Interface	\$269.00
Expansion Interface 16K	\$403.20
Expansion Interface 32K	\$524.00
16K Memory Kit for TRS-80 or Apple	\$79.95



TRS-80 & NORTH STAR ADD-ON DRIVES

CUSTOM ENCLOSURE



CABLE INCLUDED

Single drive system in custom enclosure.	\$414.12
Single drive system in metal enclosure.	\$375.00
Double drive system in custom enclosure.	\$824.14

MPI.	\$279.00
MPI, B52, dual headed.	\$349.00
Shugart SA400.	\$286.00
Shugart SA800.	\$479.00
Tandon single sided.	\$279.00
Tandon double sided.	\$425.00
Siemen 8" drive.	\$430.00
Single tier walnut enclosure for Shugart.	\$27.00
Double tier walnut enclosure for Shugart.	\$45.00
Atari 400.	\$548.49
Atari 800.	\$994.49
Hazeltine 1400, 18 month warranty.	\$649.95
Centronics PI Printer (TRS-80 add on).	\$398.95
Centronics 779-2 tractor (TRS-80 add on).	\$1049.95
TI Printer.	\$1599.00
Base 2.	\$599.00
Horizon 1, 32K.	\$2290.00
Superbrain.	\$2695.00
SPECIAL! MINI FLOPPY DISKS, box of 10 (with plastic box) only \$28.00 (without plastic box) only \$26.50. Box of 10. 8" disks (in plastic box \$30.00). Centronic 779 ribbons \$3.50 each.	

torasystems INC

WE ACCEPT BANK AMERICAN, VISA, MASTER CHARGE

29-02 23rd Ave., Astoria, N.Y. 11105
TWX 7105822107 (212) 728-5252
(800) 221-1340 303

16K MEMORY

TMS 4116-30JDH

16K x 1 Dynamic RAMs
for: TRS-80™, Apple,
Exidy and others.

8 \$59.00

8 \$74.00

for Canadian customers

Add \$3 to help cover postage and handling. Sask. residence add 5% sales tax.

TRS-80™ installation information is available on request.

TAITRONICS ENTERPRISES

1263 Wallace St. 380

Regina Sask. Can.

S4N 3Z2 ph. (306) 527-2088



CalData Systems Presents

294

WordMagic II

Complete WORD PROCESSING
designed specifically for

The Radio Shack TRS-80 Model II Computer

WordMagic II* is a Word Processor designed specifically for the Radio Shack TRS-80 Model II Computer.*

FEATURES INCLUDE:

- Mailing List/Labels Generation
- Automatic Merging of Mailing Data with Text Files to create "PERSONALIZED" Form Letters
- Automatic wrap-around in text entry
- Margination, Paging, Complete Cursor Movement
- Complete Editing Commands—Insertion, Global Substitution, Overwrite, etc.
- Centering, Smooth Right, Left Justify
- Table of Contents Generation
- Automatic Page Numbering
- Variable Form Lengths
- Underlining
- Line Numbering

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

Requires 64K Model II, TRSDOS & BASIC (not provided with WordMagic)
Introductory Pricing: \$125.00 Manual \$20. (Cal. Res. add tax)

CalData Systems



P.O. Box 178446

San Diego, CA 92117 (714) 272-2661

NOW EVEN
LOWER!

**SPECIAL
PRICE**

**TRS-80* -I or -II
MEMORY EXPANSION
CHIP SET: \$59!!**

We've done it again... 8 low power, 250 ns 16K dynamic RAMs at a trend-setting price. Expands memory in TRS-80*, Apple, Heath H89, Exidy Sorcerer, newer PETS, etc. Don't be impressed with fancy packaging or four color ads; our chip set gives all the performance you want at a price you can afford. Offer good while supplies last. Add \$3 for TRS-80* compatible DIP shunts and complete installation instructions.

* TRS-80 is a trademark of the Tandy Corporation.

TERMS: Cal res add tax. Allow 5% shipping, excess refunded. VISA®/Mastercharge® call our 24 hr. order desk at (415) 562-0636. COD OK with street address for UPS. Prices subject to change without notice.

WE ALSO MANUFACTURE AN EXTENSIVE
LINE OF S-100 PRODUCTS; SEE COMPUPRO
S-100 BOARDS IN PERSON AT FINER
COMPUTER STORES WORLD-WIDE.

CompuPro™

from **GODBOUNT**
ELECTRONICS

Bldg. 725, Oakland Airport, CA 94614

75

Use the first program on your tape to keep track of the tape.

Cassette File

James Tallman
3468 S.E. Roanoke
Hillsboro, OR 97123

If you want to store more than one program for your TRS-80 on a particular tape, a method of keeping track of the beginning of each program is useful.

The CTR-41 tape recorder has a tape counter that can indicate where a program is saved on the cassette. To maintain a record of which program begins at what counter reading, simply jot down the tape count indication and program name.

However, if a written log is lost, you have no easy way of recovering the information. You can write a program to store the tape directory as the first file on

any cassette. Such a program stores the information in DATA statements.

The program begins by clearing the screen and printing a heading (lines 110 and 130). For Level II machines an extra statement is required, because of an error in Radio Shack's ROMs. (See my note attached to the Program Listing.)

Statement 140 reads the program's name as A\$ and three numbers, A, B and C. They are expected to be the tape counter's start of three copies of the program in A\$. You can modify this if you want only one or two copies.

Any negative value read for A ends the program (line 150). I usually put a -1 value at the end of the program to indicate this.

The program then prints out A\$ and the three starting counter locations of each of the three

copies of the program. Control goes back to line 140 for another read and checks for a negative A. The program ends when either the negative value for A is read or the list of data is exhausted.

It's important to set the counter to zero at the start of the tape for the counts to be reliable. Also, I use the next-to-the-last line to indicate the next available place on the tape to save a subsequent program. ■

```
100 REM CASSETTE FILE PROGRAM
110 CLS
120 POKE 16553:255
130 PRINT " PROGRAMS ", "COPY #1", "COPY #2", "COPY #3"
140 READ A$,A,B,C
150 IF A<0 END
160 PRINT A$,A,B,C:GOTO 140
500 DATA SLOWPOKE, 104, 109, 114
510 DATA BLACKJACK, 122, 180, 235
520 DATA CASSETTE TEST, 288, 297, 305
530 DATA NEXT AVAILABLE, 313, 0, 0
9999 DATA END, -1, 0, 0
```

This program works with both Level I and Level II BASIC.

*Required on Level II because of an error in Radio Shack ROMs. If this line is omitted, the program re-reads through an automatic RESTORE. (See Radio Shack's addendum to the Level II BASIC Reference Manual, item #1.)


Program Listing.

Call us, Write us, or Circle our reader service

If you like to receive mail related to the TRS-80® Model I or Model II, then send us your name and address. Companies and individuals all across the country have products and programs they want to tell you about. Products that will enable you to use and enjoy your computer more.

Each day a trip to your mailbox can bring you useful, interesting information on accessories, business programs, game programs, hardware, supplies, etc.

And by mailing directly to you the companies can go into greater detail on their products and services. So send your name and address today. Tell us if you own a Model I or Model II and if your interest is in personal/hobby or business use.



TRS-80® Reg. Trademark of Radio Shack

216

National Tricor, Inc./3335 Greenleaf Blvd./Kalamazoo, MI 49008/616-375-7519

Subscribe to

80

 microcomputing™

fill out the
reply card
on page 194

SO YOU WANT TO USE YOUR TRS-80 TO:

Relearn French. Help your children with their reading. Teach your entire family to program. But Interaction Is So Awkward In BASIC.

BPILOT IS THE LANGUAGE FOR YOU

BPILOT is a version of PILOT written especially for the TRS-80 with either Level II or Disk BASIC. PILOT was developed by teachers for Computer Aided Instruction. PILOT allows you to concentrate on the instructional goals, not the computer.

BPILOT HAS 3 VERY IMPORTANT FEATURES:

1. BPILOT is a complete PILOT. It includes the eXecute Indirect command, a complete Match instruction, end long labels.
2. You create BPILOT programs using the TRS-80 commands you are familiar with (AUTO, EDIT, LIST, TRON...). There are no new (and confusing) system commands.
3. BPILOT allows you to use both PILOT and BASIC instructions in your programs. Besides increasing the power of PILOT, this makes it easy to learn PILOT if you know BASIC, and easy to teach your children BASIC once they know PILOT.

BPILOT is a concise assembly language program making extensive use of the Level II ROMs. On a 4K system, the Level II version of BPILOT leaves 2K for programs. On a 16K system, the Disk version leaves 4K for programs. At \$24.95 for either version, including a reference manual and 3 demonstration programs, BPILOT is a true bargain. For more information or to order, contact:

✓ 388 Computer Aided and
Managed Instruction
P.O. Box 2030
Goleta, CA 93019

CAMI

THE WAIT IS OVER

Now for the first time, CPAIDS, is making available its Federal 1040 Tax package for the TRS-80 Model II.

Featuring 1% and 3% medical limitation incorporated, auto checks for FICA over withholding, auto earned income credit, auto dividend exclusions, types tax preparer's Fed. 10 and SSN; proformas all forms for subsequent years.

Schedules - A, B, C, D, E, F, G, R/RP, SE, TC, ES

Forms - 2106, 2119, 2210, 2441, 3468, 3903, 4625, 4972, 4726, 4797, 5695, 6521

Requires 64 K with dual disks using CP/M.

CALL TOLL FREE
800-321-2430

✓ 388

CPAIDS

1640 Franklin Ave., Kent, Ohio 44240

MANAGEMENT SYSTEMS SOFTWARE

ANNOUNCES

TWO NEW BUSINESS PROGRAMS FOR THE SMALL BUSINESSMAN BY

JEROME S. OSTERYOUNG, PH.D.

RENOWNED BUSINESS EDUCATOR AND AUTHOR OF 5 BUSINESS TEXTS

PROFORMA CASH-FLOW PROGRAM

FORECASTS CASH NEEDS AND LIQUIDITY

FOR UP TO 12 PERIODS

\$125.00

EXTENSIVE DOCUMENTATION WITH EACH PROGRAM

CASSETTE OR DISK

WRITE FOR BROCHURE

* LEASE-PURCHASE PROGRAM

EVALUATES LEASE VS PURCHASE DECISION

INCORPORATES LATEST TAX IMPLICATIONS

\$100.00

MANAGEMENT SYSTEMS SOFTWARE

5200 BRITTANY DRIVE, #1006 ST. PETERSBURG FL 33715

(813) 864-4347

✓ 87

— TRS-80 MODEL II USERS —



Introductory Offer: Buy both covers & save

Preserve—Protect—Display your equipment with **CRYSTAL CLEAR PLASTIC COVERS** Model I covers also available.

• Keyboard & CRT...MOD II...\$24.95 ea. Plus \$1.50

• Line Printer II...MOD II...\$14.95 ea. postage each.

MOD II Combination price \$34.95 Including postage

Crown Plastic Co.

3746 N. College 317-925-5566

Indianapolis, IN 46225

(Indiana residents add 4% sales tax)


FOOTBALL for the TRS-80*

Now you can play football at home on your Level I 4K TRS-80*. You and your opponent plan strategies against each other. The computer analyzes the offensive and defensive plays and calculates yardage lost or gained. Send \$19.95 for your football cassette and instructions.

FERIN ENTERPRISES ✓ 252

6310 Underwood Ave. S.W.
Cedar Rapids, Iowa 52404

* TRS-80 is a trademark of the Tandy Corp.

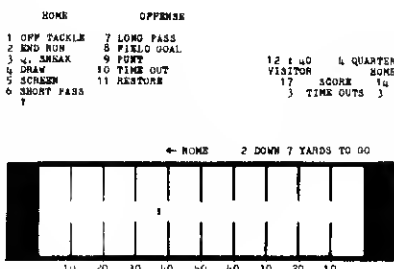

Instant Software™ New Releases



EXECUTIVE EXPENSE REPORT GENERATOR

How often have you returned from a long, successful business trip and dreaded facing that ugly beast, THE EXPENSE REPORT?

Before you left, you firmly resolved to note every expense in a little black book. It all worked fine for about two days. Now, you stare disgustedly at a pile of crumpled bills and scraps of paper,

which you've dug out of various jacket pockets.

This program will take away that pain. No, it won't tell you how to cheat on that expense report! It will simply tell you how to play the game using established rules.

The jumble of figures you attempted to add could drive you up the proverbial wall. No matter what you try to do, the grand total refuses to equal the original cash advance for the trip.

However, when you supply your tale of woe to this program, your answer will be a clear expense layout, plausible and quickly done. (The program has hard-copy capability; you'll need a printer.) You'll be able to present a reasonable and credible expense sheet.

Gone are the desperate guessing games; now you can start your next business trip with an easy mind because you've got the Executive Expense Report Generator.

For the TRS-80 Level II 16K. Order No. 0135R \$9.95

ENHANCED BASIC

Enhance the power of your TRS-80 Level II microcomputer with the Enhanced BASIC package. This package gives you many functions found in Disk BASIC plus other new features, without having to add a disk drive system.

You can have:

- Enhanced string handling capabilities.
 - An INSTR search function for finding strings within strings.
 - Edit strings by replacement of portions of strings with sub-strings.
 - Input a whole line of characters into a string variable with your own prompts.
- Build your own functions.
 - Use this routine as a shorthand for repeated, complex relationships.
 - Use your own function names.
- Use hexadecimal and octal constants directly.
 - Avoid the hassle of hex-to-decimal manipulations.
 - Use numeric and strings forms.
- A decimal-to-hexadecimal conversion function.
 - Use it directly in program or calculator mode.
 - Convert from variables or constants.
- Use up to ten user defined machine-language subroutines.
 - Define the entry points with a new statement.
 - POKE in machine-language subroutines with this easy to use feature.
 - Use this to create faster graphics routines.
- Simulate keyboard INPUT from the cassette recorder. This powerful feature will allow you to run a "keyboard" session from tape.
 - Record programs, commands, and input responses on tape.
 - The programs can RUN and operate exactly as if you were at the keyboard.
- A keyboard debounce routine

The package documentation includes detailed instructions, with listings of sample programs, that will have you practicing and using Enhanced BASIC in no time at all.

So stretch the limits of both your imagination and your TRS-80 with the Enhanced BASIC package.

Order No. 0077R (cassette version) \$24.95

ENERGY CONSUMPTION


The Energy Consumption program will record your utility bills for up to a five year period. All you have to do is supply data for the following six categories, which will be stored on a data tape:

- GAS\$\$—Dollars spent on natural gas.
- CCF—Hundreds of cubic feet of natural gas used.
- H20\$\$—Dollars spent on water.
- GAL—Gallons of water used.
- PWR\$\$—Dollars spent on electricity.
- KWH—Kilowatt hours of electricity used.

These six monthly averages and unit costs will be calculated upon your request. The statistics section allows immediate retrieval of all information. You can compare data for a single month, or for multi-month periods in any combination.

The program is ideal for the following applications:

- Comparing your costs versus the rising costs of energy.
- Examining the seasonal effects upon your energy consumption.

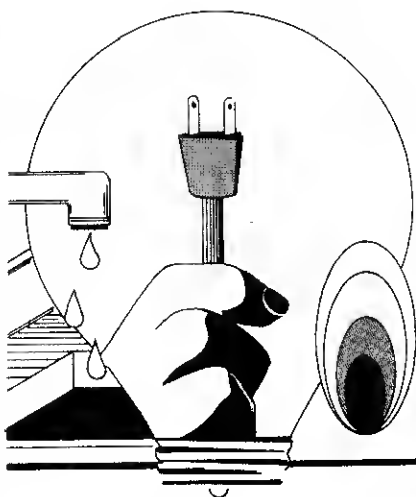

C. Analyzing the effectiveness of any conservation measures you may have undertaken.


For the TRS-80 Level II 16K. Order No. 0132R \$9.95

TO ORDER: Look for these programs at the dealer nearest you. If your store does not stock Instant Software send your order with payment to: Instant Software Inc., Order Dept., Peterborough, N.H. 03458 (add \$1.00 for handling) or call toll-free 1-800-258-5473 (VISA, Master Charge and American Express accepted).

Instant Software™

Prices subject to change without notice
PETERBOROUGH, N.H. 03458
603-924-7296

Instant Software™ New Releases

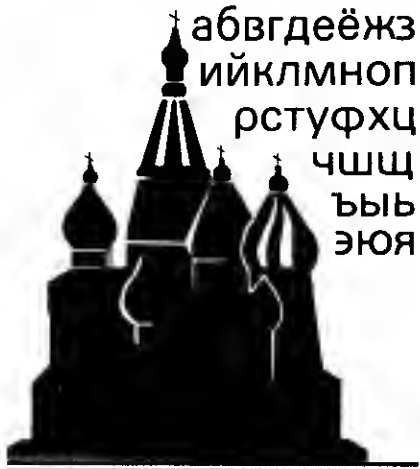

THE RUSSIAN DISK

Scholars and diplomats know that in order to understand a foreign culture, you must know its language. In today's international politics and commerce, one of the most valuable languages to know is Russian. The Russian Disk can put you well on the road to mastering this vital language.

This package will give you on-screen displays of the Cyrillic letters of the Russian alphabet, detailed instructions of their proper pronunciation, plus exercises to aid you in recognizing and speaking simple Russian words.

This package not only teaches you the words but also presents you with a quiz. You pick the words upon which you wish to work, then the computer will score you on your progress in learning the lesson.

You can even practice typing in Russian. The program will allow you to type letters, or words, using the complete Cyrillic alphabet, so that you can practice writing hotel names, tourist attractions and street addresses.

This program is excellent for students, businessmen, scientists, and anyone who is interested in learning the Russian language.

This package requires the following minimum system:

1. A TRS-80 Level II 16K.
2. An Expansion Interface with 16K RAM.
3. A single disk drive.
4. Any compatible Disk Operating System.

Order No. 0212RD \$24.95

TO ORDER: Look for these programs at the dealer nearest you. If your store does not stock Instant Software send your order with payment to: Instant Software Inc., Order Dept., Peterborough, N.H. 03458 (Add \$1.00 for handling) or call toll-free 1-800-258-5473 (VISA, Master Charge and American Express accepted).

THE WORDSLINGER

When you think of word processors for the TRS-80, you think of multi-disk systems with lots of expensive RAM and peripherals. The Wordslinger system changes all that.

The Wordslinger is an economical word processing program that was designed for the individual user or small business. It's ideal for personal or business correspondence. The program has automatic formatting for letterhead stationary and envelope addressing. You can write and edit business letters, reports, forms, even schoolwork. Text is stored on cassette

tapes for fast, inexpensive retrieval. Once you've used The Wordslinger, you won't want to go back to your typewriter.

One of The Wordslinger's major advantages is that you don't need disk drives or an Expansion Interface. The minimum system required is the TRS-80 Level II with 16K of RAM and an appropriate printer (you may need an Expansion Interface if your printer can't operate with just a printer interface cable, such as Radio Shack's part #26-1411 or 26-1416).

Complete text editing is yours for the asking, just ask for The Wordslinger. Order No. 0129R \$29.95.

DLDIS


DLDIS is a three-pass, label-assigning disassembler which assigns labels (where appropriate) to routines in a machine language program to give an output which is identical to a hand-assembled source code. Using DLDIS, you have options which enable you to send the disassembly to either a lineprinter (Radio Shack parallel port) or to tape (for subsequent reassembly by Apparat's extension of Radio Shack's EDTASM™). Because of the use of labels, it is a simple matter to change any object code program by disassembling, and then making changes to the resultant source without losing track of jump/load addresses. DLDIS even has a comments column to display any ASCII characters used in a LD or CP opcode.

Since DLDIS works only on in-memory programs, it has been made relocatable so that you may move it around in memory to avoid the program you wish to disassemble. As an added option you may also jump to memory locations and transfer control between DLDIS and other utility programs in your computer.

This package requires the following minimum system:

1. A TRS-80 Level II with 16K RAM.
2. An Expansion Interface.
3. A single disk drive.
4. Any compatible Disk Operating System.

Order No. 0231RD (disk-based version) \$19.95.

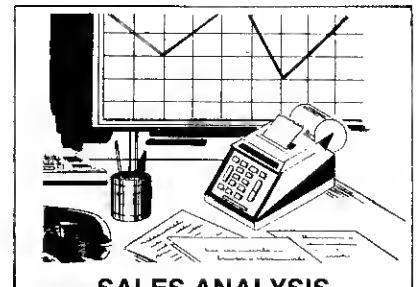

SALES ANALYSIS

If your business is sales, whether as a salesperson or salesmanager, you're faced with some unique problems. How do you keep track of your day-to-day work, in what areas can you improve your sales technique, and how can you determine who your best prospects are? The Sales Analysis package is the answer to all these problems and more.

This package is divided into several modules:

The Sales Analysis module is designed to provide guidelines for determining an individual's sales performance, to analyze this performance and show you where it can be improved.

The Data Storage module allows you to store data in an automated processing ledger.

A Management Analysis module can take all the sales records for your group and show you who your best salespersons are, who needs more training and in what areas, and give you a sales forecast based on the projected improvement of your group's sales techniques.

Finally, the Market Analysis module, combined with the marketing data you supply, can show you where determined sales efforts can produce the most success.

If your specialty is sales, then the Sales Analysis package is what you need. For the TRS-80 Level II 16K.

Order No. 0131R (cassette-based) \$24.95

Instant Software™

✓ 2 Prices subject to change without notice.
PETERBOROUGH, N.H. 03458
603-924-7296

How to incorporate machine code into your BASIC programs.

Machine Code USR

Larry McDonald
4130 Ferrara St.
Jacksonville, FL 32217

The major advantage that a machine language program has over a BASIC interpreter program is the speed of its execution. This proves very useful for long running programs or when producing high-speed graphics.

Program Listing 1 is a BASIC program that branches to a short machine language subroutine and uses this subroutine to paint the screen white. Control returns immediately to the BASIC program where we delay several seconds and then print a message.

Before you try Listing 1, try

the two test programs below and time them for comparison.

Test 1... 10FORX = 0TO127:FOR Y = 0TO47:
SET(X,Y):NEXT Y:NEXT X
Test 2... 10FORX = 15360TO16384:POKE X,
191:NEXT X (191 in POKE is ASCII
code for white graphics byte.)

Test 1 requires approximately 47 seconds from the time you hit the ENTER key until the word READY is displayed. Test 2 runs much faster and only requires about seven seconds to completely paint the screen.

Whiting Out the Screen

Now that you've made these comparisons, enter Listing 1. The first portion loads the machine language program (Exam-

ple 1) and waits for the ENTER key to be depressed before actually executing the subroutine.

For comparison purposes, begin timing when you press ENTER and count until the screen is completely white. When you run this program, you should

find that the screen is completely white before your finger has been lifted from the ENTER key (one second or less).

You can really appreciate the meaning of the term microsecond when you realize that this simple program performed over

```
10 DATA 229,62,191,50,0,60,33,0,60
20 DATA 17,1,60,1,255,3,237,176,225,201
30 PRINT "Z-00 MACHINE LANGUAGE SUBROUTINE":PRINT
40 PRINT "WHEN THE ENTER KEY IS PRESSED, THE PROGRAM WILL ENTER"
50 PRINT "A MACHINE LANGUAGE PROGRAM VIA THE POKE COMMAND":PRINT
60 INPUT "PRESS ENTER TO POKE THE PROGRAM INTO MEMORY":AS:CLS
65 FOR N=20346TO20364:READ:POKE N,H:NEXT N
70 PRINT "AT THIS POINT, A PROGRAM HAS BEEN LOADED"
80 PRINT "THAT WILL CAUSE THE SCREEN TO BE PAINTED WHITE."
90 PRINT "WE WILL USE THE USR(0) COMMAND TO BRANCH TO THIS"
100 PRINT "MACHINE LANGUAGE PROGRAM":PRINT
110 INPUT "PRESS THE ENTER KEY TO BRANCH TO THE SUBROUTINE":AS:CLS
120 POKE 16526,122:POKE 16527,79
130 X=USR(0)
140 REM - A DELAY LOOP TO KEEP THE SCREEN WHITE FOR SEVERAL SECONDS
150 FOR N=1TO1200:NEXT N:CLS
160 PRINT "AT THIS POINT, WE HAVE RETURNED BACK TO THE"
170 PRINT "BASIC PROGRAM AND HAVE CONTINUED EXECUTING."
180 PRINT "END OF PROGRAM . . ."
190 END
```

Program 1. BASIC Program to White Screen.

```
1 POKE 16553,255
5 CLS
10 DIM B$(16),C$(16)
20 DATA '0','1','2','3','4','5','6','7','8','9','A','B','C','D','E','F'
30 DATA 0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15
40 FOR N=1TO16:READB$(N):NEXT N
50 FOR N=1TO16:READC$(N):NEXT N
70 PRINT "HEXADECIMAL DUMP ROUTINE":PRINT
80 PRINT "WRITTEN IN LEVEL 11 BASIC WITH Z-80 MACHINE LANGUAGE SRTN"
90 PRINT "INPUT ENTER STARTING DUMP ADDRESS IN HEXADECIMAL":AS
99 REM NEXT LINE SPLITS AS INTO FOUR SEPARATE CHARACTERS
100 A1$=MID$(AS,1,1):A2$=MID$(AS,2,1):A3$=MID$(AS,3,1):A4$=MID$(AS,4,1)
101 REM NEXT FIVE LINES CONVERT HEX CHARACTERS TO DECIMAL
105 N=0
110 SR$=A1$:GOSUB1000:A1$=SR:N=N+1
120 SR$=A2$:GOSUB1000:A2$=SR:N=N+1
130 SR$=A3$:GOSUB1000:A3$=SR:N=N+1
140 SR$=A4$:GOSUB1000:A4$=SR
150 REM AT THIS POINT I HAVE CONVERTED ALL FOUR DIGITS AND AM READY
151 REM TO MULTIPLY TO GET THE VALUES TO POKE TO THE SUBROUTINE.
152 REM VARIABLE M$ REPRESENTS THE MOST SIGNIFICANT BYTE, VARIABLE
153 REM L$ REPRESENTS THE LEAST SIGNIFICANT BYTE.
160 M$=(A1*16)+A2:L$=(A3*16)+A4
169 REM POKE DUMP LOC TO SUBROUTINE (M$ TO 4F70, L$ TO 4F7C)
170 POKE 20349,M$:POKE 20348,L$
179 REM POKE START OF SUBROUTINE (4F7A) TO 16526+16527
180 POKE 16527,79:POKE 16526,122
185 CLS
189 REM NOW WE BRANCH TO MACHINE LANGUAGE ROUTINE
190 X=USR(0)
199 REM NOW WE HAVE RETURNED
200 PRINT "960,":INPUT "I=CONT.,2=NEW DUMP,3=END PROGRAM":Y
210 IF Y=1THEN190
220 IF Y=2THEN90
230 END
999 REM THIS IS THE CONVERSION MATCH SRTN TO DERIVE POKE VALUES
1000 N=N+1
1010 IF N>16THENPRINT "ERROR..RE-ENTER VALUE":GOTO90
1020 IF SR$=B$(N)THEN 1030 ELSE 1000
1030 SR=C$(N):RETURN
1040 END
```

Program 2. Hexadecimal Dump Program.


QWORDFORMATERRBGCYPQGGZIVJBPCES
SHNOBTXADOFREEIDEASEEDSRPVYXXON
VLTWGYROSGREDPVJKLMRHECTVXHNAFH
BJELFEQAZGZPPCRYPTOUPZAXZQJEJTS
ZOQINKFSNAGTHLGFIJSEYWTVPFJVZVC
BVLFGULMNSNEKOTTSCYMBGWBQOFMPO
UDVZKBFIOEPUYASEXMOLERZJXACHYRU
PKBMYUCWOCGLDMRXSEWMCZTIONGULYK
ZMHOUXPBLKACAPJJUKBFLIPCNEFQAFE
JWTAJCJGWHETMNAHQZQJLOWERCASETH
HRSSKVCDCGCBAPTGTHTXTPLLEILRETQ
EYINDLXXCBVCXDZHOPIRYVYPRVADNTOL

FREE IDEA SEEDS™

Have you ordered yours? If not, you better reconsider. More than 5000 happy subscribers think you don't know what you are missing. These are FREE programs for your TRS-80 and all you have to do to get them is send us a legal size SASE. That is all there is to it. Simple? You bet! Every month there's a new program and you really don't want to miss any of them! When you stop and think about it there are only three ways to build your software library. One way is to write the program yourself. Another way is to purchase programs. The best way is to have the programs given to you and that is just what we are doing! All FREE IDEA SEEDS are our own original programs and we want you to have them to use, rewrite, and expand. Send your legal size SASE to:

CECDAT, Inc. ✓62 PO Box 8963 Moscow, ID 83843

this publication is available in microform

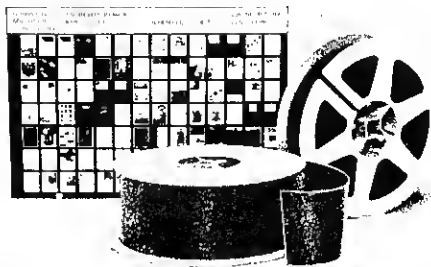

Please send me additional information.
University Microfilms International

300 North Zeeb Road
Dept. P.R.
Ann Arbor, MI 48106
U.S.A.
18 Bedford Row
Dept. P.R.
London, WC1R 4EJ
England

Name _____
Institution _____
Street _____
City _____
State _____ Zip _____

```

----- START OF CONTROL ROUTINE -----
4F7A E5      PUSH HL      ;SAVE HL BEFORE WE CHANGE IT
4F7B 21 88 88 LD HL,8888H ;LD START ADD TO HL
4F7E J1 40 3C LD DE,3C40H ;LD VIDEO ADD TO DE
4F81 0E 08    LD C,8      ;LD 8 TO C FOR LINE COUNT
4F83 06 10    LD B,16     ;LD 16 TO B FOR BYTE COUNT
4F85 CD AB 4F CALL LOC1   ;CALL SRTH TO PRINT BYTE LOC
4F88 7E       LD A,(HL)   ;LD BYTE TO ACCUMULATOR
4F89 CD C6 4F CALL CVERT2  ;CALL 2 DIG. CONV. ROUTINE
4F8C 23       INC HL      ;INCREMENT BYTE POINTER
4F8D 3E 20    LD A,20H    ;LD BLANK TO ACCUM.(SEPARATOR)
4F8F 12       LD (DE),A   ;LD ACCUM W/BLANK TO SCREEN
4F90 13       INC DE      ;INCREMENT VIDEO POINTER
4F91 05       DEC B       ;DECREMENT BYTE COUNTER
4F92 J2 88 4F JNZ,LOOP1   ;IF NOT 16 BYTES, JMP LOOP1
4F95 06 09    LD B,09     ;LD 9 TO B, TO SPACE TO NEXT
4F97 13       INC DE      ;INCREMENT VIDEO 9 TIMES
4F98 05       DEC B       ;DECREMENT COUNTER
4F99 C2 97 4F JNZ,LOOP2   ;B NOT 0, JMP LOOP2
4F9C 0D       DEC C       ;DECREMENT C (LINE COUNTER)
4F9D C2 83 4F JNZ,LOOP   ;IF NOT 6 LINES, JMP LOOP
4FA0 22 7C 4F LD (4F7C),HL ;SAVE POINTER LOC TO CONT.
4FA3 E1       POP HL      ;RESTORE HL BEFORE RETURN
4FA4 C9       RET        ;FINAL RETURN TO BASIC
4FA5 00 00 00 NOP         ;FILLER BYTES IF NEEDED
4FAB 00 00 00 NOP         ;FILLER BYTES IF NEEDED

----- END OF CONTROL ROUTINE -----

----- START OF LOCATION SRTH -----
4FAB 7C       LD A,H      ;LD H REG TO A REG
4FAC CD C6 4F CALL CVERT2  ;CALL CONV.RTN TO DECODE BYTE
4FAF 7D       LD A,L      ;LD L REG TO A REG
4FB0 CD C6 4F CALL CVERT2  ;CALL CONV.RTN TO DECODE BYTE
4FB3 3E 20    LD A,20H    ;THIS AND NEXT 6 LINES SIMPLY
4FB5 12       LD (DE),A   ;LOAD BLANK TO ACCUM. AND
4FB6 13       INC DE      ;THEN LOAD TO VIDEO - PURPOSE
4FB7 12       LD (DE),A   ;IS TO LEAVE THREE SPACES
4FB8 13       INC DE      ;
4FB9 12       LD (DE),A   ;
4FBA 13       INC DE      ;
4FBB C9       RET        ;RETURN FROM THIS SRTH

----- END OF LOCATION SRTH -----
4FBC 00 00 00 00 NOP      ;
4FC0 00 00 00 00 NOP      ;THESE 3 NOP'S JUST FILLERS
4FC4 00 00 00 00 NOP      ;

----- START OF 2 DIGIT CONVERSION ROUTINE -----
4FC6 09       CVERT2     EXX      ;EXCHANGE REG. TO USE C'
4FC7 4F       LD C,A      ;LD ACCUM. TO C TO SAVE
4FC8 D9       EXX        ;EXCHANGE BACK TO NORMAL REG.
4FC9 CB 3F    SRL A       ;THIS AND NEXT THREE LINES
4FCB CB 3F    SRL A       ;USED TO SHIFT MS BITS TO
4FCD CB 3F    SRL A       ;THE LS BITS AND ZERO OUT
4FCE CB 3F    SRL A       ;THE MS BITS(TO DECODE LEFT)
4FD1 CD E1 4F CALL TST1   ;CALL SRTH TO CONVERT TO ASCII
4FD4 12       LD (DE),A   ;LD CONVERTED BYTE TO VIDEO
4FD5 13       INC DE      ;INCREMENT VIDEO FOR NEXT
4FD6 D9       EXX        ;EXCHANGE REG. TO RESTOR BYTE
4FD7 79       LD A,C      ;LD BYTE BACK TO ACCUM.
4FD8 D9       EXX        ;EXCHANGE BACK TO NORMAL REG.
4FD9 E6 0F    AND,0FH     ;AND TO MASK OFF MS BITS
4FDB CD E1 4F CALL TST1   ;CALL SRTH TO CONVERT TO ASCII
4FDE 12       LD (DE),A   ;LD CONVERTED BYTE TO VIDEO
4FDF 13       INC DE      ;INCREMENT VIDEO FOR NEXT
4FE0 C9       RET        ;RETURN FROM THIS SRTH

----- END OF 2 DIGIT CONVERSION ROUTINE -----

----- START OF ASCII SRTH -----
4FE1 C6 30    TST1        ADD A,30H ;ADD TO CVERT TO ASCII
4FE3 FE 3A    CP 3AH      ;CPARE TO SEE IF ALPHA
4FE5 FA EA 4F JPM,TST2   ;IF NUMERIC, JP TO RET (TST2)
4FE8 C6 07    ADD A,07H   ;ELSE, ADD 7 FOR ALPHA
4FEA C9       RET        ;RETURN FROM THIS SRTH

----- END OF ASCII SRTH -----

```

Program Listing 3. Hexadecimal Dump Routine.

```

4F7A E5      PUSH HL      ;SAVE HL REG.
4F7B 3E BF    LD A,BFH    ;LD GRAPHICS BYTE TO A
4F7D 32 00 3C LD (3C00),A ;LD A TO 3C00
4F80 21 00 3C LD HL,3C00H ;LD VIDEO ADD TO HL.
4F83 11 01 3C LD DE,3C01H ;LD VIDEO+1 TO DE.
4F86 01 FF 3F LD BC,3FFH ;LD 1023 TO BC.
4F89 ED 80    LDIR       ;BLOCK TRANSFER INSTR.
4F8B E1       POP HL      ;RESTORE HL REG.
4F8C C9       RET        ;RETURN TO BASIC PROG.

```

Example 1. Machine Language Subroutine.

a thousand operations in the time it took us to press and release the ENTER key.

Program Listing 2 is a hexadecimal dump program. The BASIC program obtains the desired starting address. This address is then converted to hexadecimal and inserted into the sub-

routine via the POKE command. The starting location of the machine language routine is then POKed into memory locations 16526 and 16527.

At this point, I use a statement containing the USR(0) function (for instance, X=USR(0)) which causes control to

At this point, the BASIC pro-



BOX 49

TRS-80

gram gives you three options. If you enter a one, the next consecutive eight lines will be displayed. If you enter a two, you are allowed to specify a new dump location. A three ends the program.

Program Listing 3 is the machine language subroutine. Although the format is similar to an assembler's output, it was manually entered.

When actually entering the data (via T-BUG), you use only the first two columns. The first column identifies the memory location, while the second column contains the actual hexadecimal values.

The program can be saved on tape with T-BUG (suggested

name=HEXDMP), and the BASIC program can be saved immediately following it.

When you power up your Level II, answer the 'MEMORY?' statement with 20340. The subroutine loads via the system command, and then the main program loads and executes in the normal manner.

Comments have been added to Listing 3 to identify the various program functions.

Easier Loading

Since it is a short routine, it may be easier for you to load the machine language subroutine as part of the BASIC program, using the POKE statement. Adding the statements shown in Ex-

```
32 DATA 229,33,122,79,17,64,60,14,8,6,16,205,171,79,126,205,198,79
33 DATA 35,62,32,18,19,5,194,136,79,6,9,19,5,194,151,79,13,194
34 DATA 131,79,34,124,79,225,201,0,0,0,0,0,124,205,198,79,125,205
35 DATA 198,79,62,32,18,19,18,19,18,19,201,0,0,0,0,0,0,0,0,217
36 DATA 79,217,203,63,203,63,203,63,203,63,205,225,79,18,19,217,121
37 DATA 217,230,15,205,225,79,18,19,201,198,48,254,58,250,234,79
38 DATA 198,7,201
```

Example 2. Additions to POKE Machine Language Subroutine.

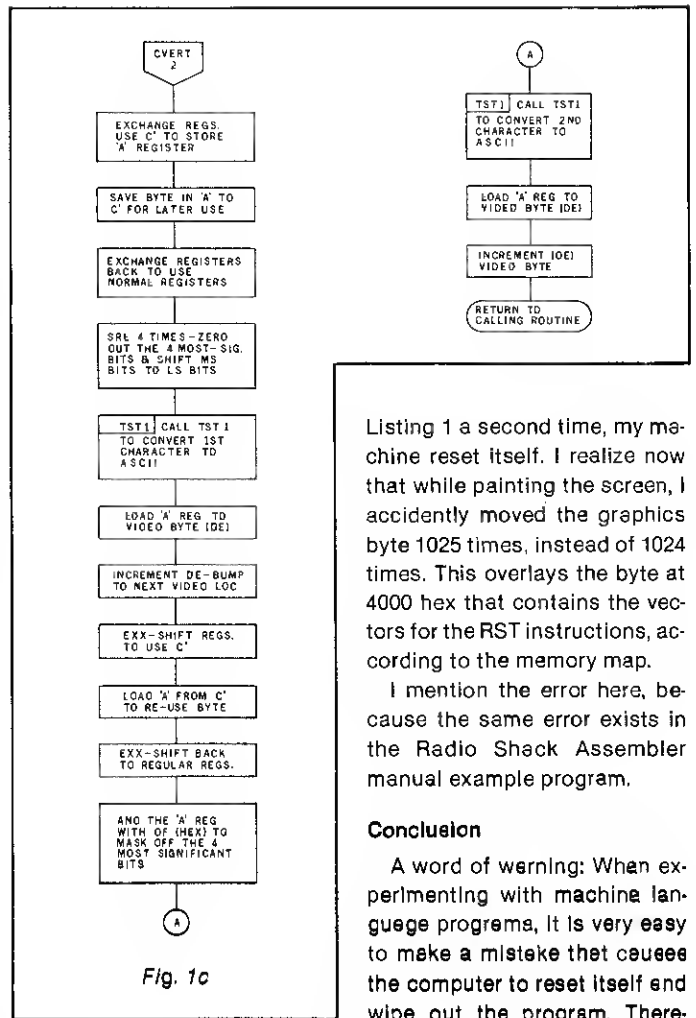


Fig. 1c

Listing 1 a second time, my machine reset itself. I realize now that while painting the screen, I accidentally moved the graphics byte 1025 times, instead of 1024 times. This overlays the byte at 4000 hex that contains the vectors for the RST instructions, according to the memory map.

I mention the error here, because the same error exists in the Radio Shack Assembler manual example program.

Conclusion

A word of warning: When experimenting with machine language programs, it is very easy to make a mistake that causes the computer to reset itself and wipe out the program. Therefore, it is a good practice to save the program before you attempt to run it. If you encounter any problem with these two sample programs, check carefully to see that you have the right numbers in the right places for the data statements, and that the POKE statements are as shown. ■

ample 2 to Program Listing 2, eliminates a separate load of the subroutine.

For those interested in delving into machine language programming, a flowchart of the subroutine logic is included as Fig. 1.

While experimenting with the USR(0) function, you might encounter one or two idiosyncrasies. The first is that you have to save the HL registers (PUSH HL) as the first part of the subroutine and then restore these registers (POP HL) before returning to the BASIC program. Failing to do this causes the program to dump the program location only, instead of dumping the location you specified. Apparently, the USR(0) function transfers the address from 16526 and 16527 to the HL registers.

The second idiosyncrasy is the result of a programming error of mine. You might make the same. Initially, if I ran Program

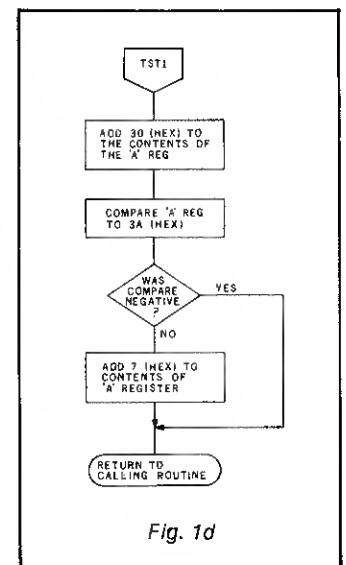


Fig. 1d

!! REDUCE PROGRAMMING EFFORT BY 50% !!

DATAENTR 200

ISAM 100

IN FOUR SIMPLE STEPS

- [1] Draw the Data Entry Form on the VIDEO SCREEN
- [2] Specify Checking for Each Field
 - Options:
 - Alpha Type Check
 - Length Check
 - Num. Type Check
 - No Field Checking
 - Y/N Check
- [3] Save Data Entry Control Form
- [4] DATAENTR Subroutines in Application. COMPLETELY Control Data Entry.

- ★ Get & Put Records to Disk File by "KEY"
- ★ Read File in Key Sequence Without Sorting
- ★ Delete Records Without Recopying File
- ★ Add to Disk Files in Any Sequence
- ★ Variable Key Length From 1 to 50 Characters

BUSINESS APPLICATION ADVANTAGES

- Standard Auto. Operator Error Prompts
- Simplified Operator Training
- Reduced Program Dev. Time
- Eliminate Garbage In/Out Problems

- Imp. Disk Utilization
- Easier Prog. Development
- Improved Oper Characteristics
- Reduce or Eliminate Sorting
- Improved Performance

DISTRIBUTED ON DISKETTE --- INCLUDES:

- Screen Prep. Utility
- DATAENTR Subroutines
- Example Program
- Complete Documentation
- ISAM Subroutines
- ISAM Utilities
- Documentation
- Mail list Sample Application

\$80.00

\$90.00

TRS-80[®] MODEL I & II SOFTWARE FROM:

Johnson Associates
P.O. Box 1402M
Redding, CA 96001

24 Hour Order Line
For Bank Card Sales
(916) 221-0740

- WRITE FOR FREE CATALOG -

TRS-80[®] Registered Trademark of the TANDY CORP.

THE HUMAN ADVENTURE!

The Human Adventure is the ultimate in educational game simulations. The entire human body is mapped into a complex maze that allows exploration of all major organ systems. As you travel through the body, your progress is mapped on the CAT-scan in the lower portion of the screen. Status reports, command input, energy levels, and full descriptions of all organs, veins, and arteries are displayed at all times and updated as you move.

Will you merely explore? Or will you race against time to save a patient from cancer? Can you maintain sufficient energy levels to allow laser defense against white cell attacks? Will your immune defense screens hold? Will your supply of interferon hold out? What difficulty level do you dare choose?

Med Systems guarantees satisfaction. Return any order within two weeks for a complete and cheerful refund.

TRS-80 Level II 16K \$9.95
Look soon for APPLE, PET, SORCERER, and NORTHSTAR.



Med Systems Software



P.O. Box 2674 Chapel Hill, NC 27514

TRS-80 CASSETTE SOFTWARE SOL-20

Home and Light Business Applications

These popular, professionally developed applications are low-priced. Guaranteed performance! Detailed booklet included.

- BUDGET & INVESTMENT \$17.95
- BUDGET & CHECKING \$14.95
- HOME INFO RETRIEVAL \$11.95
- MATH (ages 5 and up) \$ 7.95
- STOCK PORTFOLIO \$18.95
- AUTOMOBILE \$12.95
- MASTERMIND game \$10.95
- MONTE CARLO game \$ 7.95
- and others from \$ 4.95

Send order, or \$1.00 for descriptive catalogue (free with order) to: ✓ 116

NEWBY SOFTWARE DEVELOPMENT CO.
299 OAWLISH AVE. TORONTO, CANADA M4N 1J6

SMALL QUANTITY STOCK CONTINUOUS FORMS

- STATEMENTS
- INVOICES
- CHECKS
- BILL OF LADING
- SPEED-O-GRAM

IMPRINTING AVAILABLE

STOCK PRINTOUT PAPER

9-1/2 x 11 1 PART

14-7/8 x 11 1 PART

STOCK CONTINUOUS LABELS

Call or Write for Prices & Samples

DDF DISCOUNT DATA FORMS, INC.
407 EISENHOWER LANE SOUTH
LOMBARD, ILLINOIS 60148
(312) 629-6850

✓ 366

For Canadian * Owners

Lower Case Modification . . . \$85.00
Cassette Load Modification . . \$20.00
Radio Shack Numeric Keyboard
Installation \$50.00
(You supply numeric pad)

RS232C Serial I/O Port for Printer
etc. (Complete with connectors)
For Use With or Without Expansion
Box \$169.95

For a complete catalog and credit
vouchers worth \$25.00 on future
purchases send \$5.00 to:

*All Quotes in Canadian Funds

ORTHON COMPUTER
(ORTHON HOLDINGS LTD.)

✓ 108

12411 Stony Plain Rd.,
Edmonton, Alta, T5N 3N3

EDUCATIONAL SOFTWARE TRS-80*

80+ Programs in:

- | | |
|---------------|----------------|
| ELEMENTARY | MATH |
| SCIENCE | BIOLOGY |
| GEOGRAPHY | HISTORY |
| ECONOMICS | ACCOUNTING |
| FOREIGN LANG. | BUSINESS ED. |
| GAMES | MAILING LABELS |

Programs are grouped into packages of
4 to 7 programs priced at \$14.95 per
package including shipping and handling.
Available on disk or tape.

Write for catalog: ✓ 89

MICRO LEARNINGWARE, BOX 2134,
N. MANKATO MN 56001, 507-625-2205
TRS-80 is a registered trademark of TANDY CORP.

Send SASE for free information

FORTH is an advanced language/system for advanced programmers. MMSFORTH is a professional version tailored to the Radio Shack TRS-80 Model 1 and professionally supported by Miller Microcomputer Services.

Includes 5 Demo Programs w/Source Code

Expendable Instruction Set w/Source Code

Graphical, Strings, Arrays, Double Memory

Very Fast and Compact

Includes 5 Demo Programs w/Source Code

MMSFORTH System Diskette (16K, 1 drive) . . . \$84.95

MMSFORTH System Cassette (16K, Level II) . . . \$44.95

MMSFORTH PRIMER (required for above) . . . \$15.00

THE DATAHANDLER in MMSFORTH (32K, 1 drive) — an exceptionally fast, flexible and easy to use Data Base Management System . . . \$9.95

PIM'S Manual (required for DATAHANDLER) . . . \$29.95

FLOATING POINT MATH and FULL 280 ASSEMBLER Diskette (16K, 1 drive) . . . \$25.00

Other FORTH literature . . . \$19.95

USING FORTH — more detailed and advanced introduction . . . \$9.95

MMSFORTH PRIMER — very readable introduction . . . \$ 9.95

ORTH TUTORIAL MANUAL — good on FORTH internal structure . . . \$ 6.95

CALTECH FORTH MANUAL — good on FORTH internal structure . . . \$ 2.95

Shipping is \$2 plus \$1 per extra book (Mass. orders add 5% tax, foreign plus 15%)

mmsFORTH
MILLER MICROCOMPUTER SERVICES
61 Lake Shore Rd., Natick, MA 01760
617-653-6136

***** SECURITY CONTROL CENTER *****

You can control light when you're not at home, at random times. Turn video or recording equipment, appliance, bell, loud alarm device on and off at preset times, even months advance. * Comes with program, control module, and ac adaptor *
(\$29.50)

*** AUTOMATIC TELEPHONE DIALER ***

You can dial telephone automatically 500 or more. Even if you forgot telephone number. If you remember part of it, you can find the number through search command.
* Comes with program, control module and ac adaptor *
(\$29.50)

***** 80-DEEP *****

To be used to signal the end of long sort and signal you in case of loading error. It also lets you know with one beep, two beeps, etc. Exactly what part of the program you are in.
* Comes with instruction, control module and ac adaptor *
(\$29.50)

** S-C COMPUTER TECHNOLOGY **

P.O. Box 1246, Covino CA 91722
Phone (213) 332-2216 or 966-9868

—Visa and Mastercharge accepted—

779 UPPER CASE/lower case "Conversion Kit I"

Expand the capabilities of your 779 line printer to include word processing! Available to all Centronics 779/TRS 80 Printer I owners is the option of lower case and changing slash 0 Zero to standard O. No etch cuts or soldering needed. Installs in minutes with a screwdriver. No program modification or additional interface is required.
Price \$125.00

Motor Control "CONVERSION KIT II" FOR ALL CENTRONICS 779/TRS 80 PRINTER I LINE PRINTERS!

Our "Conversion Kit II" Motor Controller gives your 779 the ability to turn the motor on and off automatically. Removes the annoying noise of constant run, increasing the life span of your 779 / TRS 80 line printer motor! No soldering, software or hardware changes needed. Installs easily.
Price \$95.00

SAVE! Buy Service Technologies "Conversion Kit I" and "Conversion Kit II" together for the single price of \$199.00

To order, please send check or money order in the proper amount to:

Service Technologies, Inc.
32 Nightingale Rd.
Nashua, N.H. 03062 ✓ 297
(603) 883-5369

Visa and Master Charge accepted (please include signature, expiration date and phone number)
Service Technologies will pay all shipping and handling.

accounts receivable

This program was developed for our family business. The goal was an orderly transition from hand-kept books to computerized bookkeeping. Accounts receivable including sales tax was the most time consuming, thus the beginning. Time spent on accounts receivable has been cut in half. More detailed statements sent earlier have decreased the outstanding receivables.

This program is designed for business people, not computer or accounting experts. All inputs are structured for fast and efficient operation. If a math check is required, extensions and totals are checked faster than with a calculator. If a math check is not required, only the amount of sale, less any tax, is entered. The program stores sales tax information on all customers and will display the proper tax, if any is required. Non-taxable customers making a taxable purchase, customers from a tax district other than the place of business, picking up at the place of business are easily handled by the program. Amount of tax and taxable sales are compiled and stored for up to 100 sales tax districts.

Every entry can be edited at any time. If an incorrect or missing transaction is found after statements are printed, the corrections can be made and the statement reprinted. Sales tax and monthly data in disk files are adjusted by this process.

Rate of service charge and customers' receive service charge are selected by the user.

Overview and Sample Reports \$5.00
Documentation \$25.00
Program Disk & Documentation \$200.00

solutions 80
✓ 277 Route 55
La Grangeville, New York 12540

*For the computer neophyte,
find out what a TRS-80 can do.*

The TRS-80

Alexander MacLean
WA2SUT/NNN02VB
18 Indian Spring Trail
Denville NJ 07834

Only one small computer system is designed for home consumption, assuming little or no background in either computer programming or electronics—the Radio Shack TRS-80.

Once it is set up, which takes about 10-15 minutes the first time, you are ready to begin with the Level I manual which lives up to its reputation for being one of the best introductions to the computers and their language. Once you start playing with the computer you enter a mental state known as manic-keypressive. You won't want to stop until you get through the book as quickly as you can.

Flaws Along the Way

There are areas where I would fault the manual, especially since it's intended for a beginner.

While there are few obvious errors, I should have known there was going to be trouble when one of their examples re-

ferred to "Watts law."

Often you have to refer to the answer pages to solve a problem and find that their solution requires information you were not given.

Some problems, they don't even mention. There is an information storing line, called a data line, which they say can appear in any part of the program—beginning, middle, end or wherever. What they don't tell you is that data lines must be in the proper order among themselves or there will be trouble.

Imagine a list of quantities such as volts, ohms and amperes. The data for these categories can appear at any point in the program, but the information must be in the order of the headings, thus the volts data must be before the ohms data which is before the amperes data.

Their graphics section in particular lacks explanation. You are shown examples of graphics procedures, but you are left to figure out exactly what is happening. You can imitate the manual, but you do not get a really firm grasp of what you are doing and why.

It will probably take you about one to two weeks work (at several hours per day) to go over all of the material in the instruction part of the manual.

The Next Plateau

That is where the next plateau begins. What can I do with the computer? That is where the Radio Shack manual, like others lets you down rather badly. There is an information gap between learning the various mechanical computer functions and developing working programs based upon your own information and needs.

There are a few sample programs in the back of the manual. Some are more than novelties, but even if studied they really only give you bits and pieces of information. Your learning depends on your ability to analyze.

There is an additional Level I BASIC instruction course available from Radio Shack for about \$13, consisting of eight taped lessons to be played on your computer. Each lesson contains two to four parts.

One salesman told me that the lessons were meant for people who weren't going to learn the manual, another said they were supplemental information to the manual. I tried the course to see what it did. It took several hours to cover what in actuality was very little information.

For the material covered I think they could have done better with a small paperback costing a buck rather than a set

of tapes costing much more.

You will get better with experience and there is no substitute for working with the computer. You'll start thinking in computer terms and find that you can build longer programs from your own information.

This still leaves unanswered the question of what you can actually do with your computer.

There is potential in the Level I 4K, but it has limitations. Much depends on how well you can take the individual language elements and combine them to do work.

While you can store data or do record keeping with it, it takes computer memory that you don't really have.

What the machine does best is manipulate numbers repetitively. Let's take a simple example, ohms law: $E = IR$. This elementary formula can solve many problems.

If we assume 10 volts and 10 ohms we can solve for current (I) by the use of $I = E/R$. For one value we can do it easily with a pocket calculator or even pencil and paper. In what Radio Shack calls the calculator mode, you can use your computer as a pocket calculator. But a TRS-80 is more expensive.

But suppose you wanted to know the current as you varied both the voltage and the resis-

SUPERIOR SOFTWARE PACKAGES
FOR THE
DISK BASED **TRS-80***

SMARTTERM • \$79.95

UNQUESTIONABLY THE BEST
SMART TERMINAL PACKAGE
FOR THE TRS-80

- True Break Key
- Auto Repeat (Typomatic) keys
- Programmable 'soft' keys
- Forward/Reverse Scrolling
- Multipage Display
- Transmit from Disk File, Screen or Buffer
- Receive to Disk File, Buffer or printer
- Multi Protocol Capability

SPOOL-80 • \$39.95

A TRUE DISK-TO-PRINT DESPOOLER
FOR THE TRS-80

- Print Disk Files While Running Other Programs
- Prints Compressed Basic Files
- Includes RS-232 Driver for Serial Printers

CALL US FOR YOUR CUSTOM
SOFTWARE REQUIREMENTS

MICRON, INC.

10045 Waterford Drive
Ellicott City, MD 21043
(301) 461-2721

Model II
Versions
Available
Soon

*TRS-80 is a Trademark of Tandy Corp.

YOU'VE LOVED OUR WAR GAMES AND OUR FANTASY GAMES:
AND NOW YOU'LL GO CRAZY FOR OUR —

NEW COMPUTER GAMES!

HERE ARE SOME OF OUR NEWEST:

COMPUTER AMBUSH

A computer simulation of squad level combat during World War II. In this two-player or solitaire game each player commands up to ten soldiers and attempts to complete one of the many different missions that can be assigned. An exciting simulation that brings realism to your computer.

TRS-80 Model I, 32K Disk \$59.95
Apple II, 48K Disk \$59.95

RESCUE AT RIGEL

As Sudden Smith you can free the prisoners of the High Tollah in this science fiction simulation of role-playing in which the computer is the referee. This STARQUEST scenario ties role-playing with the universe of Invasion Orion in a fast-paced game using graphics and real-time action.

TRS-80 Level II, 16K Tape \$19.95
Apple II, 32K Tape \$19.95
TRS-80 Model I, 32K Disk \$24.95
Apple II, 48K Disk \$24.95

WORLD'S EDGE

The year is 1998 and Earth is doomed unless you can obtain two kilograms of a rare mineral found only on an asteroid. The search can be costly as the natives of the asteroid would dearly like to see you end your life, but only you can save the Earth. This machine language 'ADVENTURE' takes you to the edge of tomorrow for hours of computer fun.

TRS-80 Level II, 16K Tape \$14.95


ASK ABOUT OUR 180 DAY GUARANTEED SALES POLICY

DEALER & DISTRIBUTOR INFORMATION

✓355 AVAILABLE ON REQUEST
MAIL ORDERS WELCOME!

ZOCCHI
DISTRIBUTORS

01956 Pass Road
Gulfport, MS. 39531
(601) 896-8600

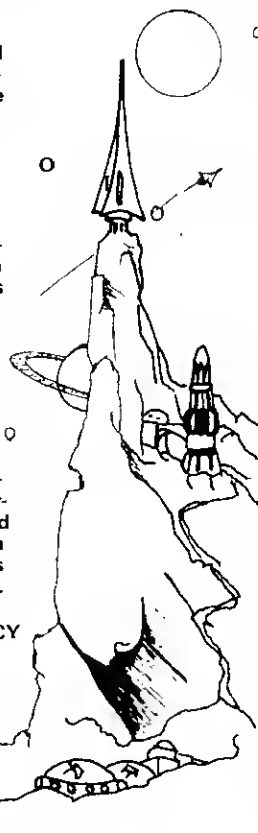

Let Your TRS-80® Teach You ASSEMBLY LANGUAGE

Tired of buying book after book on assembly language programming and still not knowing your POP from your PUSH?

REMSOFT proudly announces a more efficient way, using your own TRS-80®, to learn the fundamentals of assembly language programming --at YOUR pace and at YOUR convenience.

Our unique package, "INTRODUCTION TO TRS-80® ASSEMBLY PROGRAMMING", will provide you with the following:

- Ten 45-minute lessons on audio cassettes.
- A driver program to make your TRS-80® video monitor serve as a blackboard for the instructor.
- A display program for each lesson to provide illustration and reinforcement for what you are hearing.
- A textbook on TRS-80® Assembly Language Programming.
- Step-by-step dissection of complete and useful routines to test memory and to gain direct control over the keyboard, video monitor, and printer.
- How to access and use powerful routines in your Level II ROM.

This course was developed and recorded by Joseph E. Willis and is based on the successful series of courses he has taught at Meta Technologies Corporation, the Radio Shack Computer Center, and other locations in Northern Ohio. The minimum system required is a Level II, 16K RAM.

REMASSEM-1 only \$69.95



REMSOFT, Inc.
571 E. 185 st.
Euclid, Ohio 44119
(216) 531-1338




Include \$1.50 for shipping and handling.
Ohio residents add 5 1/2% sales tax.

TRS-80® is a trademark of the Tandy Corp.

✓70

CHALLENGING NEW—EXCITING



*A game of skill and daring that will not be forgotten in a few plays like other cassette games.

*Travel through one of over a million random dungeons, each with a maze of over 25 random rooms.

*Search for countless treasures while you fight against monsters, traps, and time.

*TRS-80 Level II, 16K BASIC cassette comes with easy printed instructions, complete with sound effects.

BK-1 \$7.95

(Pa. residents—add 6% sales tax)

Send your check or money order now to:

JMS Corp.

✓249

Box 18083

Pittsburgh, Pa. 15236

BRING YOUR TRS-80 KEYBOARD TO LIFE!

More than a year ago we used this headline to introduce AUTOK and QEDIT, the keyboard autorepeat and quick edit utilities for Level II BASIC. They've been very popular, but we couldn't resist working them over anyway, in response to customer suggestions. The result? KEYEDIT, a vastly improved AUTOK, QEDIT, and a few things more.

With KEYEDIT and your Level II or Disk BASIC system, you get:

- Debouncing. No need to use Radio Shack's KBFIX!
- Autorepeat on every key. Just hold a key down, and after a half-second delay, the character repeats about eight per second.
- Single-keystroke keyword entry. Hold down SHIFT, hit a letter key, and an entire BASIC keyword is spelled out at once. Plus, you can assign any keyword to any key!
- Keyboard macro facility. Any frequently-typed pattern can be defined and later invoked in a single keystroke. You just fill in the blanks. Takes the drudgery out of repetitive keying.
- Screen-oriented editing. KEYEDIT's cursor moves anywhere in a displayed program listing for instant insertions and deletions. Plus, whole statements can be copied to other parts of the program or combined to form longer ones, without retyping the text. Makes BASIC's EDIT function obsolete!
- Easy loading. KEYEDIT loads from cassette using CLOAD (even though it's written in machine language), and may be saved on disk. Features can be deleted selectively just by deleting lines. Once RUN, KEYEDIT protects itself in memory and links into BASIC, where it unobtrusively awaits your command.
- Thorough documentation. Each feature is explained in detail along with instructions for user modifications.

KEYEDIT will save you hours of effort in BASIC program development. So why waste another minute? Bring your keyboard to life today with KEYEDIT!

KEYEDIT Level II cassette and instructions:

\$19



**DISCOVERY BAY
SOFTWARE CO.**

P.O. Box 464 Port Townsend, WA 98368

Bankcards welcome.

Dealer inquiries invited.

Write us directly for more information.

tance, say 10 to 100 volts in ten volt steps with the resistance changing at each voltage level from 1 to 10 ohms in one ohm steps.

This takes 100 separate calculations. It would take some time to work out with the pocket calculator or using the computer in its calculator mode. But you could write a short program to solve it. The computer takes off on RUN and you have the answers in a few seconds.

Now suppose you wanted to know the power for each set of values. We have 100 values which means 100 more calculations for the power formula. This takes only a few extra lines added to the program. Now you have twice as much information.

Let's get real mean. Suppose you had a precision requirement and needed to know the values from 1 to 100 volts in 1 volt steps and 1 to 100 ohms in 1 ohm steps. The program would be just about the same length. Just a few numbers would change. But you would be talking about

10,000 calculations, plus another 10,000 for the power formula.

Try that on your pocket calculator or with pencil and paper. On a computer, it might take some time to run, but it would.

Three Salesmen

Now let's look at another operation. Let's assume we have three salesmen, as in Table 1. Smith, Jones and Rogers each earn so much in sales, spend so much to make it and have a total earnings and percentage figure.

We would like the computer to list names and figures and then do calculations based

upon the data. Here is where we run into computer problems.

The basic computer will not give you a list of names and figures like that. However, the computer can take the earnings and costs and figure the net earnings and the percentage earned.

Notice that these figures appear across the line. In that form the computer will do these calculations on each person.

Now look at the bottom figures. These are the overall totals for the earnings and expenses. This requires the computer to figure from top to bottom. But a Level I cannot read or

manipulate the data in that form.

There are programs that will perform some of the calculations but they require high level programming skills. All the data has to be typed into the program in the correct form and only limited answers are available.

This does not mean that the computer can't be used for some form of data processing, but you will have to break the job up into smaller sections.

Even prepared 4K programs are limited in scope. An inventory program I saw, allowed only 100 items with cost and inventory.

A Learning Tool

By now it should be clear that what you really do with the Radio Shack TRS-80 is learn with it. It is an effective introduction to the computer. You will have to work at finding your own path into the computing world beyond, but help is out there: clubs; stores; magazines; night schools. Good luck! ■

	GROSS	COST	NET	PERCENTAGE
Smith	10,000	2,500	7,500	75%
Jones	10,000	3,000	7,000	70%
Rogers	9,000	500	8,500	94.44%
	29,000	6,000	23,000	79.31%

Table 1. While the computer figures across the lines, Level I cannot add columns or handle the names in any convenient manner.

PLAY TRUE CASINO CRAPS.



INVENT A SYSTEM TO BEAT THE CASINOS WITHOUT LOSING A CENT!

COMES COMPLETE WITH:
Craps Table Layout
48-page Gamblers' Booklet
Showing Table Odds, How To Bet, etc.
and Software Cassette.

HERE IS SOFTWARE THAT SIMULATES EXACTLY THE 'VEGAS CASINO CRAPS GAME.

FOR TRS-80™, MODEL I, LEVEL II, 8K RAM

PRICE COMPLETE: CASSETTE, LAYOUT, 48-page PRINTED BOOKLET \$11.95

✓ 394

Postpaid

KARLART PUBLISHING CO., INC.
P.O. BOX 30024
CHICAGO, IL 60630

Earn an EXTRA Income with your TRS-80*

Everyone is feeling the bite of inflation but some TRS-80 owners have found a way to ease the pain. Some are making a few hundred extra dollars and a few are making thousands of dollars in their spare time. Our booklet "Money Making Ideas for the TRS-80" is a collection of these money making methods, along with program sources, program hints, getting started suggestions and pit-falls to avoid.

Send \$9.95 to:

J&R Electronics
P.O. Box 492 ✓ 398
Crystal City, MO 63019

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

HEATH H14 TRS 80

NO SOFTWARE REQUIRED

Serial interface mounts inside and is powered by expansion interface. Connects at parallel printer port. Easy installation. May be used externally but requires +5 V and +/- 9 to 12 V.

Uses printer driver in Level II ROM. No software driver needed in high RAM. No more software compatibility problems.

- RS-232-C Interface Free for Other Uses •
- Baud Rate Adjustable From 1200 to 4800 •
- Handshaking Prevents Lost Characters •
- Output Meets EIA RS-232-C •

May be used with other serial printers which send Line Feed after Carriage Return. Data format is 1 Start Bit, 8 Data Bits, 2 Stop Bits.

--- Ordering Information ---

Kit With All Parts	\$29.95
Printed Circuit Board With Instructions	12.95
Assembled & Tested With 90 Day Warranty	44.95

Please Include \$1.50 Shipping and Handling

(NOTE: RS-232 Connector Not Supplied)

SPEEDWAY ELECTRONICS
1354 Auburn
Speedway, Indiana 46224

PHONE (317) 925 0496
MASTER CHARGE VISA ✓ 275

America's One-Stop Computer Center

HOBBYWORLD[®] ELECTRONICS, INC.

Call Toll-Free: USA (800) 423-5387
In California: (800) 382-3651
Local & Outside USA: (213) 886-9200



MICROPOLIS[®] DISK DRIVES

Imagine a 5 1/4" floppy disk system with all the storage capacity of an 8" floppy system, and more!

Micropolis can give you more storage because they pack more data onto every disk. Ordinary 5 1/4" floppies provide just 35 tracks per drive and store 70 to 130 K bytes of data. Instead, Micropolis uses 77 tracks each with 16 sectors of 156 bytes to yield an incredible storage capacity of 315k bytes per drive.

And that's not all! Reliability doesn't just happen by accident. At Micropolis reliability is engineered into each step of manufacturing. For example, most 5 1/4" floppy disks cut costs by using a plastic cam or cam follower to position the read/write head. Micropolis chose to use the strength and durability of an all steel cam and cam follower. Sure, it costs more, but it gives you more accurate tracking over a significantly greater lifespan which adds up to a lower cost per byte with use. Software from Micropolis includes a comprehensive DOS, (disk operating system), and disk Extended Basic designed for 8080/8085 microcomputer systems. The DOS is complete with an assembler, editor, file management functions and disk utilities. Micropolis BASIC is a complete, powerful programming tool for developing, testing, executing and maintaining basic programs.

The model 1043 MOD II is a single floppy disk with 315k bytes storage and includes the S-100 disk controller board. If you need more storage, or simply want to save even more money, then order the model 1053 MOD II dual disk system with 630k bytes storage capacity and S-100 Controller board. Micropolis DOS and disk extended BASIC are standard with both units.

Cat No.	Description	Weight	Price
2563	Model 1043 mod II single drive	9 lbs	\$1145.00
2564	Model 1053 mod II dual drive	18 lbs	\$1895.00

MINI 8100 TAS-80 to S-100 BUS ADAPTOR

Mini size, mini price, maxi performance. A complete adaptor/motherboard for the TRS-80.

Cat No.	Description	Price
1905	Kit, all parts, 1 S-100 connector	\$115.00
1906	A & T with 4 S-100 connectors	\$155.45
1907	Kit with S-100 size bd, plugs into mainframe	\$90.00
1908	A & T as above	\$125.00

SSM SB 1 MUSIC SYNTHESIZER BOARD

- Plug compatible with the S-100 bus! **\$199 Kit**
- Software uses 4K of RAM
- Uses standard ASCII notation for music encoding
- Easy to write and correct music!

Wave form synthesizer, designed to interface with the S-100 bus. Can be programmed to play a monophonic solo in an instrumental voice that is controlled by the software. Software includes a timer for definition of tempo and time signatures. Music can be heard immediately after the notation has been typed in. Multiple cards can be used to produce chords and harmonies.

Cat No. 1408	Kit with software	\$199.00
Cat No. 1409	S81 assembled and tested	\$279.00
Cat No. 1410	S81 bare board	\$45.00

Leedex VIDEO 100 12" MONITOR

- Compatible with TRS-80 (no interface required)
- Compatible with many home computers!

Now from LEEDEX... One of the most popular low cost, yet high resolution (650 line) monitors currently available. These units compare favorably with monitors costing twice as much. Because of the fact that standard composite video input is utilized no RF modulator is needed. An extremely sharp and stable picture is achieved. The video bandwidth is 12 mhz + / - 3db with a 75 ohm input impedance.

Cat No. 1204	Video 100 Monitor	Wt. 18 lb.	\$139.00
Cat No. 1937	TRS-80/Leedex cable kit	Wt. 6 oz.	\$3.00

"HEAD TO HEAD" ELECTRONIC FOOTBALL

Two ways to play, against the computer or against a friend, and two levels of skill, semi-pro and pro. This versatile computerized game will provide hours of fun with authentic football action. Complete offense and defense control, pass block, run and kick/punt. LED statistical display and electronic sound effects. Batteries not included. Wt. 10 oz. **\$54.95**
Cat No. 2404

SSM VB2 VIDEO BOARD

I/O controlled video interface board. With a TV monitor, the VB2 becomes a video terminal! No other I/O card is required for keyboard input and video display. The cursor, lined, carriage return, backspace and clear screen are hardware controlled. The display is 64 X 16, all upper case and is selectable for white-on-black or black-on-white.

Produces a clear, bright display, and features adjustable picture size and character width. Circuitry is provided to drive a speaker for beep tone.

Cat No.	Description	Price
1438	VB2 kit	\$189.00
1439	VB2 A&T	\$234.00

TAS-80 CP/M

At last, CP/M is available for the TRS-80! Long a standard for software development and interchange for all the "other" 8080/8085 computers on the market, CP/M will now provide the same environment for the TRS-80. CP/M is a file-oriented disk operating system that provides a common set of utilities for program development and operation. There are six built in commands plus utilities called in from disk. CP/M will run on a TRS-80 with as little as 16k of memory and one disk drive. Comes complete with six manuals. CP/M is a registered trademark of Digital Research.

Cat No. 1679	TRS-80 Level II 16k-w/disk	\$149.95
--------------	----------------------------	-----------------

NEWDOS + TAS 80 DOS

Contains NEWDOS, DIRCHECK, DISASSEM, EDTASM, LEVEL I in LEVEL II, LMOFFSET, and SUPERZAP

NEWDOS provides fixes for many of TRS DOS 2.1's problems. Many enhancements to BASIC have been added, including built-in renumbering, some abbreviated commands, scrolling of listings up or down, screen printing (dumps contents of screen to printer), clears up keyboard bounce, direct call to DOS without leaving BASIC (display directory etc.), display all occurrences of variables used, etc.

With NEWDOS you also get DIRCHECK, which tests and lists disk directories, DISASSEM, which is a disassembler, EDTASM, which allows you to use your Radio Shack Editor-Assembler on disk with disk I/O Level II in Level I allowing you to use or create Level I programs and save or retrieve them from disk. Using LVIDSKSL, LMOFFSET helps save and load machine language tapes from disk even if in same memory as DOS. Finally, SUPERZAP, which allows you to display, print and modify memory or disks. Comes with over 30 pages of documentation and presumes ownership of TRSDOS 2.1 and the Radio Shack Editor-Assembler.

Cat No. 1549	TRS-80, Level II, 16K w/disk	\$99
--------------	------------------------------	-------------

ATARI[®] HOME VIDEO SYSTEM

The nation's best selling home entertainment center is here! Currently supports a library of 25 video game cartridges with over 1300 variations and options. This system comes with interchangeable joystick and paddle controllers, realistic sound effects, produces bright & crisp colors on your TV screen and special circuits to protect your home TV. Also includes ATARI's "Combat" game with 108 variations and options.

CAT NO.	DESCRIPTION	WT.	PRICE
2375	ATARI Home Video System	8 lb.	\$183.50
2206	Driving Controller-Pair	2 lb.	\$18.59
2207	Paddle Controller-Pair	2 lb.	\$18.59
2208	Joystick Controller-Pair	2 lb.	\$18.59

ATARI Game Cartridges

2376	Starship	\$19.50	2389	Football	\$19.50
2377	Black Jack	\$19.50	2390	Bowling	\$19.50
2378	Space War	\$12.95	2391	Skydiver	\$19.50
2379	Surround	\$12.95	2392	Fun With Numbers	\$19.50
2380	Slot Machine	\$19.50	2393	Brain Game	\$19.50
2381	Outlaw	\$19.50	2394	Superman	\$19.50
2382	Sloth Racer	\$19.50	2395	Casino	\$19.50
2383	Video Olympics	\$19.50	2396	Backgammon	\$37.95
2384	Breakout	\$19.50	2397	Video Chess	\$37.95
2385	Canyon Bomber	\$19.50	2600	Space Invaders	\$25.00
2386	Street Racer	\$19.50	2609	Adventure	\$25.00
2387	HomeRun	\$19.50	2611	Indy 500	\$37.95
2388	Basketball	\$19.50		Game Cartridge Weight: 8 oz.	

16K MEMORY ADD-ON KIT \$59.95

Everything you need to upgrade your TRS-80, Apple or Exidy! An additional 16K includes illustrated instructions, RAMS and preprogrammed jumpers. No special tools required. Wt. 4 oz.

CAT NO.	DESCRIPTION
1156	TRS-80 Keyboard Unit
1156-A	TRS-80 Exp. Interface (prior to 4/1/79)
1156-B	TRS-80 Exp. Interface (after 4/1/79)
1156-C	For Apple II
1156-D	For Exidy

CCS 7811B ARITHMETIC PROCESSOR

Assembled & tested, adds advanced arithmetic power to your Apple II. AMD AM 9511 based. 16 and 32 bit fixed point, 32 bit floating point operation. Float to fixed and fixed to float conversions. Trig and inverse functions, square roots, logs, exponential, Interrupt daisy chain, DMA daisy chain, and much more. Wt. 2 lbs **\$399.95**
Cat No. 1635

NOVATION "CAT" ACOUSTIC MODEM \$179.00

The first compact modem designed for the small computer user. Transmits data over standard telephone lines. Exchange data or program with other systems. Data transfer rate up to 30 char/sec. Complete and ready to use! Requires 110 VAC, 60 Hz.
Cat No. 1480 Wt. 3 lbs.

VERBATIM 5 1/4" DISKETTES 10 per box

CAT NO.	TYPE	DESCRIPTION	PRICE
1147	525-01	Soft sector, TRS-80, etc.	\$33.00
1148	525-10	10 hole, hard, Apple, North Star	\$33.00
1149	525-16	16 hole, hard, Micropolis	\$33.00
2330	577-01	Soft sector, certified	\$49.95
2331	577-10	10 hole, hard, certified	\$49.95
2332	577-16	16 hole, hard, certified	\$49.95

DISKETTE DRIVE HEAD CLEANING KIT

Diskette drive heads need periodic maintenance to assure efficient and error-free operation. Unlike other peripheral devices, the read/write head(s) on diskette drives are extremely difficult to clean without partially disassembling the drive. The diskette drive head cleaning kit allows the user to clean the heads in just minutes, without disassembling the drive. Available in 5 1/4" or 8", both single and double sided. Kit contains 2 cleaning diskettes, 4 oz. bottle of CS-85 cleaning solution and an easy pour dispenser.

CAT NO.	DESCRIPTION	PRICE
2499	8" Disk Drive Cleaning Kit	\$30.75
2534	5 1/4" Disk Drive Cleaning Kit	\$30.75

SEND FOR FREE FLYER, FEATURING:

Page after page of exciting products. Computerized toys and games, personal computers, disk drives, integrated circuits, semi conductors. Add new dimension to your Apple, Atari, TRS-80, etc. with our special application boards and comprehensive software library. Hundreds of products available at terrific Hobbyworld prices. Circle our reader service number or write/phone for your free illustrated flyer today.

HOW TO ORDER

Pay by check, MasterCard, Visa, or C.O.D. Charge card orders please include expiration date. Payment in U.S. dollars only. Order by phone, mail or at our retail store. **MINIMUM ORDER \$10.00** Please include phone number and magazine issue you are ordering from. Prices valid thru last day of cover date. **SHIPPING:** USA: Add \$2.00 for first 2 lbs. .35¢ each add'l lb. for ground. For AIR add \$3.00 first 2 lbs., .75¢ each add'l lb. **FOREIGN:** surface: \$3.00 first 2 lbs., .60¢ each add'l lb. AIR: \$11.00 first 2 lbs., .50¢ each add'l lb. C.O.D.s add \$1.25 add'l. Not responsible for typographical errors. Some items subject to prior sale or quantity limitations. 120 day guaranteed satisfaction. Exception: partially assembled kits.

19511 Business Center Drive Dept. V8 Northridge, Calif. 91324

TRS-80 SERIAL I/O

- Can input into basic
- Can use LIST and LPRINT to output, or output continuously
- RS-232 compatible
- Can be used with or without the expansion bus
- On board switch selectable baud rates of 110, 150, 300, 600, 1200, 2400, parity or no parity odd or even, 5 to 8 data bits, and 1 or 2 stop bits. D.T.R. line
- Requires +5, -12 VDC
- Board only \$19.95 Part No. 8010, with parts \$59.95 Part No. 8010A, assembled \$79.95 Part No. 8010 C. No connectors provided, see below.



EIA/RS-232 connector Part No. DB25P \$6.00 with 9' 8 conductor cable \$10.95 Part No. DB25PS.

3' ribbon cable with attached connectors to fit TRS-80 and our serial board \$19.95 Part No. 3CAB40

COMPUCRUISE



\$129.95, with cruise control \$169.95

PAPER TIGER



Prints address labels, multicopy invoices and legal-size reports. Adjust the tractor width from 1-3/4 to 9-1/2 inches. 8 switch-selectable forms lengths. Print 6 or 8 lines per inch. Add the software-selectable full dot plotting graphics option to print illustrations, block letters, charts, graphs. Part No. 162172 \$899.95 with graphics option Part No. 162173 \$1099.95

GAME PADDLES & SOUND




Includes: 2 game paddles, interface, software, speaker, power supply, full documentation including: schematics, theory of operation, and user guide; plus 2 games on cassette (Pong and Starship War). \$79.95 Complete Part No. 7922C

DIGICOM DATA PRODUCTS INC. Series 312 Acoustic Coupler



300 BAUD Originate, Part No. AC3122, \$219.95. 300 BAUD Answer, Part No. AC3122, \$219.95. 300 BAUD Answer/Originate, Part No. AC3123, \$229.95.

IBEX LIGHT PEN



Comes with Backgammon and Tic-Tac-Toe on tape with full documentation and program listing. Requires 9v battery. Part No. IBEX \$19.95

SYSTEM EXPANSION from LNW Research

- Serial RS232C/20 mA I/O
- Floppy controller
- 32K bytes memory
- Parallel printer port
- Dual cassette port
- Real-time clock
- Screen printer bus
- Onboard power supply
- Software compatible
- Solder mask, silk screen. PC board and user manual, Part No. LNW80, \$69.95.

DISKETTES




Box of 10, 5" \$29.95, 8" \$39.95. Plastic box, holds 10 diskettes, 5" - \$4.50, 8" - \$6.50.

16K RAM


For the Apple, TRS-80 or Pet \$8 each Part No. 4116/2117.

LEEDEX MONITOR



12" Black and White • 12 MHz Bandwidth • Handsome Plastic Case • \$139.00

S-100 INTERFACE

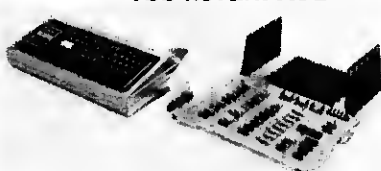

AN S-100 bus Adapter—Motherboard for the TRS-80. Kit, Part No. HUH81DLXK, \$295.95. Assembled, Part No. HUH81DLXA, \$375.95.

NOW! A FULL SUPPORT SYSTEM FOR TRS-80



- 32K of RAM
- EPROM firmware
- Disk control
- Data acquisition
- Parallel I/O
- Serial I/O
- Plug into GPA's Motherboard. GPA's quality design includes: 6-44 pin edge connectors • +5V, -5V, +12V, -12V external power supply required
- Active termination. The Motherboard, Part No. GPA80, is only \$149.95.

TAKE ADVANTAGE OF GPA-EXPANSION CARDS FOR THE GPA80


Memory cards: Now with Fortran compilers available for your TRS-80, additional expansion memory is a must! Card with sockets only, Part No. GPA801, \$119.95. Card with 16K of 4116 Dynamic Ram, Part No. GPA802, \$224.95. Card with 32K of 4116 Dynamic Ram, Part No. GPA803, \$329.95. All cards come equipped with sockets to accommodate 32K of Ram.

EPROM firmware card. Put those valuable subroutines in firmware. Don't waste time loading and unloading tapes and disks. For 2708 or 2716 EPROMS, Part No. GPA806, \$79.95.

Serial I/O card. Here's what you've been asking for, a full serial terminal interface, with RS-232C or 20 mA. Current loop. Input/output capabilities. Part No. GPA807, \$79.95.

Parallel I/O Card. Control functions in the outside world, monitor and store real time events. Two parallel output ports. Dip switches select ports (0-254). Part No. GPA808, \$79.95.

FLOPPY DISK STORAGE BINDERS



Three ring binder comes with ten transparent plastic sleeves which accommodate either twenty, five-inch or ten, eight-inch floppy disks. Binder & 10 holders, Part No. 810B—\$9.95 • Extra holders, Part No. 810—69¢ each.




Three-ring binder with ten 5 1/4 inch jackets Part No. 510B—\$9.95 • Jackets only, fits standard 3-ring binders, Part No. 510—69¢ each.

DIGITAL CASSETTE



5 min. each side. Box of 10 \$9.95. Part No. C-5.

TRENDCOM PRINTER



TRENDCOM 200, Part No. TRCO200 \$495.95. **Interface** for TRS-80, Part No. T80A \$49.95, For Apple II, Part No. TRCALL \$75.95. For PET, NO. TRCP2, \$79.95. For Scocerer, TRCSR1 \$45.95.

SARGON: A Computer Chess Program

Features the complete program that won the 1978 West Coast Computer Faire Tournament. Part No. 00603 — TRS-80 Level II; Part No. 00604 — Apple II (24K). \$19.95

SPINWRITER MODELS 5510 and 5520



Features—EIA RS-232C/CCITT V.24 Interface Standard • 55 Characters Per Second Maximum Print Rate • Impeccable Print Quality (OCR Quality) • Microprocessor Electronics • High Resolution Plotting/Graphing • Lowest Operating Noise Level • Self-Test Printing • Operator Engineered Control Panel • Prints Original and up to Seven Copies • NEC Information Systems new Model 5510 Receive Only and Model 5520 Keyboard Send/Receive SPINWRITER terminals are microprocessor controlled serial, impact terminals designed for remote printing applications where impeccable print quality is required. Model 5510 RO, Part No. NECA30759 \$2795.95 • Model 5520 KSR, Part No. NECA30762 \$3095.95

Send for FREE Catalog...a big self addressed envelope with 80¢ postage gets it fastest!

To Order:

Mention part no., description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders (U.S. only) or a VISA or Master Charge no., expiration date, signature and phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. Prices subject to change without notice.



✓ 26

Order Line: (408) 448-0800

ELECTRONIC SYSTEMS Dept. 80, P.O. Box 21638, San Jose, CA USA 95151

BRAND NEW* TRS-80's
and accessories at FANTASTIC SAVINGS

LEVEL II 16K COMPLETE.....\$690 #TRS-001XISI
16K EXPANSION UNIT.....\$400 #TRS-002SISI
32K EXPANSION UNIT.....\$525 #TRS-003SISI
DISK DRIVES (Specify which drive you want)
.....\$425 each #TRS-004SISI
FRICTION MODEL PRINTER.....\$870 #TRS-005SISI

TRACTOR FEED MODEL PRINTER.....\$1350 #TRS-006ISI
LINE PRINTER III (AND CABLE).....\$1750 #TRS-007ISI
MOD II 64K.....\$3400 #TRS-008
MOD II 2 DISK DRIVE EXPANSION
SYSTEM.....\$1625 #TRS-00
*A registered trademark of Tandy Corp.

TRS TERMS: Shipment normally within one week of receipt of your order. Microcomputer accessories may take three extra weeks to ship. Personal checks take additional two weeks to clear bank. ADD \$2.50 PER ITEM FOR HANDLING. Everything will be sent to you with UPS freight charges COLLECT. Sorry, no credit card purchases or extra discounts on TRS-80 items.

*NOT UPGRADED USED OR RECONDITIONED LEVEL I's WITH OLD KEYBOARDS BUT BRAND SPARKING NEW TRS-80's IN FACTORY CARTONS WITH FULL FACTORY WARRANTY! COMPARE PRICES AND QUALITY AND ORDER FROM MOM'S.

MOM'S

MAIL ORDER MICROS ✓ 158

Dept 880 • PO Box 427 • Marlboro NH 03455

Phone: (603) 924-3041*

TRS-80 MODEL II 64K
\$3400.00 SEE TRS TERMS

LEVEL II 16K COMPLETE

LATEST KEYBOARD,
FULL FACTORY WARRANTY
in factory carton...
NEW... \$690.00

ORDER #TRS-001X...no extra discounts...cashier's checks, personal checks, or money orders only...no credit cards. See TRS TERMS for details of shipping.

FREE with any TRS-80 LEVEL II or ACCESSORY ORDER

Your choice of any \$7.95 Instant Software Cassette (See Instant Software ad for list of programs.)

SPECIAL SUPER SAVINGS

NO CREDIT CARD ORDERS ACCEPTED

VERBATIM MINI DISKETTES

FOR TRS-80, PET, APPLE, HEATH

(Please specify which computer)

FOR TRS-80 MOD II

#P007XS

5 1/4" 10 PACK...ONLY \$24

Plus \$2.50 shipping & handling

#P015XS

8" 10 PACK.....ONLY \$36

Plus \$2.50 shipping & handling

SPECIAL SUPER SAVINGS SALE PRICES GOOD THRU COVER MONTH OF MAGAZINE—OTHER PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

*** CAUTION—**

Our phone is usually answered by machine. Orders taken with credit cards. Questions answered by mail. Please leave your name and address clearly.

5% EXTRA DISCOUNT—ITEMS THIS SECTION ONLY—ORDER NOW
for orders with checks or money orders (see "TERMS" for details). Prices subject to change without notice.

ASK MOM

For details of October 1980 Asian and European Electronics Tours. See January Wayne Green editorials in KiloBaud Microcomputing and 73 Magazine. Info #002... No charge.

MAGIC LIGHT BULB SAVER

If you've got a light bulb you need our MAGIC L.B.S. which increases the life expectancy of a new bulb 93 times! ... and saves you 44% on energy costs. Regularly \$2.50... MOM's price is \$1.99 each. #LS001.

HEAD ALIGNMENT KIT

Best cassette recorder tape head alignment kit available. Solves loading problems. #K001-only \$9.95.

TERMS: EXTRA 5% DISCOUNT ALLOWED ONLY ON ORDERS ACCOMPANIED BY CASHIERS CHECK, PERSONAL CHECK OR MONEY ORDER. NO C.O.D.'S PLEASE. ADD \$2.50 FOR HANDLING FOR ORDERS UP TO \$50.00—ALL OTHERS ADD 5% (WE REFUND EXCESS). WE SHIP UPS OR INSURED MAIL IF POSSIBLE. WE ACCEPT MC, VISA OR AMEX.

BOOK CLEARANCE

50% OFF OR MORE!

How to Buy and Use Minis And Micros (Sams-publisher) #BK 1025—was \$9.95 now \$5.
How to Program Microcomputers (Sams-publisher) #BK1027—was \$9.95 now \$4.50.
8080A Bugbook (Sams-publisher) #BK1103—was \$9.95 now \$5.
Understanding Microcomputers (Scebi-publisher) #BK1079—was \$8.30 now \$4.
Your Own Computer (Sams-publisher) #BK1072—was \$1.95 now \$1.
Underground Buying Guide (PMS-publisher) #BK1067—was \$5.45 now \$2.50.
Periodical Guide 1976 (Berg-publisher) #BK1041—was \$3 now \$1.50.
Periodical Guide 1977 (Berg-publisher) #BK1042—was \$3 now \$1.50.
Computer Book (Tab-publisher) #BK1012—was \$7.95 now \$4.

CASIO'S NEW C-80 CALCULATOR CHRONOGRAPH



has lightweight attractive ruggedly built black plastic water-tight case and band, regular digital watch features of hours, minutes, seconds, AM/PM and day on display PLUS two time zones, calendar and a 4 function calculator! You've seen it advertised in the Wall Street Journal for \$75... MOM's price is only \$49.95. Hurry our supply is limited... order #PC80 now.

SCOTT ADAMS ADVENTURES

SPECIAL 10% OFF REGULAR PRICES
(Reg \$14.95)

#1 ADVENTURELAND

YOU'LL WANDER THROUGH AN ENCHANTED LAND ENCOUNTERING WILD ANIMALS AND MAGICAL BEINGS WHILE YOU TRY TO RECOVER LOST TREASURES
Order #SA0011 for TRS Level II 16K #SA0015 for Sorcerer 16K #SA001A for Apple 24K—\$13.45 each on cassette

#2 PIRATE ADVENTURE

SAIL TO TREASURE ISLAND AND TRY TO RECOVER LONG JOHN SILVER'S LOST TREASURES
Order #SA0021 for TRS Level II 16K #SA0025 for Sorcerer 16K #SA002A for Apple 24K—\$13.45 each on cassette

#3 MISSION IMPOSSIBLE ADVENTURE

SAVE THE WORLD'S FIRST AUTOMATED NUCLEAR REACTOR WHEN YOU COMPLETE YOUR MISSION
Order #SA0031 for TRS Level II 16K #SA0035 for Sorcerer 16K #SA003A for Apple 24K—\$13.45 each on cassette

#4 WOODOO CASTLE

SAVE COUNT CRISTO FROM THE FIENDISH CURSE OR FOREVER BE DOOMED BEWARE THE WOODOO MAN
Order #SA0041 for TRS Level II 16K #SA0045 for Sorcerer 16K #SA004A for Apple 24K—\$13.45 each on cassette

#5 THE COUNT

LOVE AT FIRST BYTE FROM YOUR BIG BRASS BED IN PENNSYLVANIA
Order #SA0051 for TRS Level II 16K #SA0055 for Sorcerer 16K #SA005A for Apple 24K—\$13.45 each on cassette

#6 STRANGE ODYSSEY

YOU'RE MAROONED AT THE GALAXY'S EDGE AND DISCOVER RUNDS OF AN ANCIENT ALIEN CIVILIZATION AND TRY TO COPE WITH UNHEALTHY TECHNOLOGIES WHILE YOU AMASS FABULOUS TREASURES
Order #SA0061 for TRS Level II 16K #SA0065 for Sorcerer 16K #SA006A for Apple 24K—\$13.45 each on cassette

#7 MYSTERY FUN HOUSE

FIND YOUR WAY THROUGH THE STRANGEST FUN HOUSE BEFORE THE WEIRD PARK CLOSES.
Order #SA0071 for TRS Level II 16K #SA0075 for Sorcerer 16K #SA007A for Apple 24K—\$13.45 each on cassette

#8 PYRAMID OF DOOM


AN EGYPTIAN TREASURE HUNT THROUGH A NEWLY UNCOVERED PYRAMID COMPLETE WITH ANCIENT CURSE
Order #SA0081 for TRS Level II 16K #SA0085 for Sorcerer 16K #SA008A for Apple 24K—\$13.45 each on cassette

This gadget fits into most dashboards... no strain even in a tiny sports car like the Mazda RX-7... and once you have it, every trip is like flying a 747. The darned thing tells you the time, how fast you're going, how far you've been on this trip or since the last regassing, how many miles per gallon you're getting, either at the instant or the average on the trip... or gallons per hour at the moment or for the trip... temperature outside... inside (for coolant temperature, if you prefer)... oh, it has an elapsed time for the trip, a stop watch, lap time, an alarm... how much further for your trip, how many gallons more the trip will take, how much longer for the trip at your present average speed... yes, it gives you your average speed for the trip. You prefer it in metric, no strain... liters remaining, etc. Did we mention that it also has cruise control either at a speed set on the control board or at whatever speed you are traveling? The Computriscruise will keep you busy and entertained during any trip... telling you more than you will ever want to know.

The Computriscruise is not difficult to install... though it does connect to everything except the cigarette lighter. Until you've tried computerized travel, you haven't found out how much fun driving can be. It will work on any car not having fuel injection... and there is a front-wheel drive accessory gadget available for only \$4.40-#P001 (regularly \$5.50).

The price for the Computriscruise is regularly \$199.95... and a bargain at that price. We'll sell you one of these fantastic gadgets for \$159.95 with cruise control (Model 44-#P002), and \$127.95 without (Model 41-#P003). Send money... and start having fun!

If you enjoy driving, you're going to get a **COMPU CRUISE**. Once you see what it can do, you just won't be able to live without it.

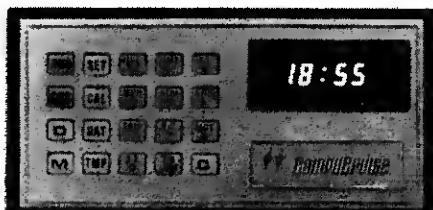

COMPU CRUISE

MODEL # 41

\$127.95

... We have them All!

All the Disks and Printers that interface to the TRS-80®

CENTRONICS PRINTERS



NEW 737

Text Quality

Parallel

List \$995 **ONLY \$849**

NEW 730 w/friction and tractor . . . **ONLY \$679!**
779 (TRS-80 Line Prtr. II), List \$1245 . . . **949***
779 w/tractor, List \$1350 . . . **1049***
702 120 cps, bi-directional, tractor, VFU . **1995**
703 180 cps, bi-directional, tractor, VFU . **2395**
 *same as Line Printer I . . . same as Line Prtr. II
 (Shipping for 730 and 737 \$7.50. Other models shipped freight collect)

RADIO SHACK® TRS-80®

with standard
Radio Shack warranty
through Radio Shack stores.



10% off on Mod I and Mod II

Mod I, 4K, List \$499 **OUR PRICE \$449**

Mod I Level 2, 16K, List \$849 **764**

Mod II w/64K, List \$3899 **3499**

Expansion-Interface with 0 RAM **\$269**



Paper Tiger, List \$995 . . . **\$895**

w/graphics option, incl. buffer, \$1194 . . . **\$989**

TRS-80 cable **\$ 45**

(Add \$7.50 for shipping and insurance.)

OKIDATA PRINTER MICROLINE 80

9x7 dot matrix, 6 or 8 lines per inch, prints 132 columns using compressed print. Prints block formatted graphics as displayed by TRS-80, u/lc, friction feed (prints from roll) or will feed standard 9 1/2" pin-feed fanfold paper. Uses Centronics style parallel interface; plug compatible with all TRS-80's. List \$949.

The
Microline
80



OUR PRICE ONLY \$649

Adjustable Tractor Feed Option **\$99**

Printers for TRS-80 require Level II machines. Printer cables extra. Call for price and order number.

NEC SPINWRITER™



A fantastic 55 cps letter-quality printer
A fantastic value . . . Call for Price!

TI-810 w/serial/parallel interf. (outperforms Line Printer III).
List \$1940 (shipped freight col.) **\$1735**

CP/M® OPERATING SYSTEM

for Mod I CP/M 1.4, List \$145 **\$129**

for Mod II CP/M 2.2, List \$170 **\$149**

Shipping \$2.50

Complete line of CP/M software available at discount prices — Call us!

TPM — a disk operating system which runs CP/M compatible programs, written specifically for 280 based systems — more efficient and less expensive than CP/M*
List \$79.95 — specify Mod I or Mod II

OUR PRICE \$59.95

Disk Drive for the TRS-80®

Save over \$100 on Radio Shack Price

Percom, Lobo, Vista

Full compatible with expansion interface and TRSDOS software.

OUR PRICE \$369

NEW Digital Innovations Drive

— complete w/case and P.S. Your choice of Shugart or MPI (40 track) drive

A Fantastic Value \$349

2-Drive Cable \$24.95

4-Drive Cable \$34.95

(Add \$6 for shipping and insurance)

CORVUS 10 megabyte hard disk for Mod. I or II

ONLY \$4795

ESCON CONVERSION FOR IBM SELECTRIC

Complete w/microprocessor controller and power supply. Factory built. User installs solenoid assembly or it can be done at Esccon factory at nominal cost.

Parallel version/TRS-80, \$575 **Only \$514**

TRS-80 Cable (specify Mod I or II) \$25

(Add \$6 for shipping)

PERCOM ELECTRIC CRAYON

List \$249.95 **ONLY \$229.95**

Prices in this ad are for prepaid orders. Charge cards and C.O.D. 2% higher. Deposit may be required with C.O.D. All prices subject to change and offers subject to withdrawal without notice. Radio Shack and TRS-80 are trademarks of the Tandy Corporation. CP/M is a trademark of Digital Research.

— WRITE FOR FREE CATALOG —

MiniMicroMart, Inc.

1618 James Street, Syracuse, NY 13203 (315) 422-4467

TWX 710-541-0431



80


microcomputing^{T.M.}

bookshelf

2 new books from the editors of KB & 80 Microcomputing



● **40 COMPUTER GAMES**—BK7381—Forty games in all in nine different categories. Games for large and small systems, and even a section on calculator games. Many versions of BASIC used and a wide variety of systems represented. A must for the serious computer gamesman. \$7.95*

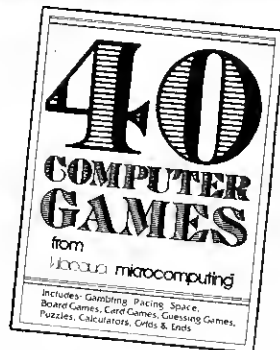


● **UNDERSTANDING AND PROGRAMMING MICROCOMPUTERS** —BK7382—A valuable addition to your computing library. This two part text includes the best articles that have appeared in 73 and Kilobaud Microcomputing magazines on the hardware and software aspects of the new microcomputing hobby. Well known authors and well structured text helps the reader get involved in America's fastest growing hobby. \$10.95*

— INTRODUCTORY —

● **HOBBY COMPUTERS ARE HERE!**—BK7322—If you (or a friend) want to come up to speed on how computers work... hardware and software... this is an excellent book. It starts with the fundamentals and explains the circuits, and the basics of programming. This book has the highest recommendations as a teaching aid for newcomers. \$4.95.*

● **THE NEW HOBBY COMPUTERS**—BK7340—This book takes it from where "HOBBY COMPUTERS ARE HERE!" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards... and much, much more! Don't miss this tremendous value! Only \$4.95.*

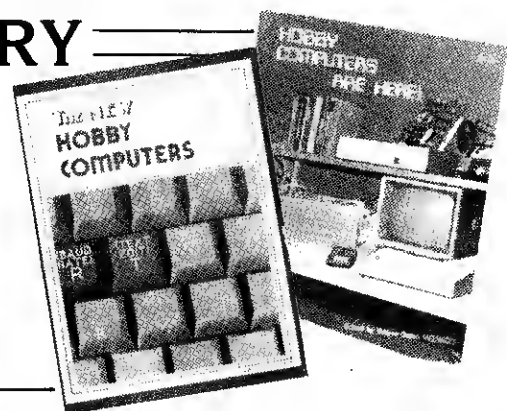

INTRODUCTION TO MICROCOMPUTERS (VOL. 0—III)

● **AN INTRODUCTION TO MICROCOMPUTERS, VOL. 0—BK1130**—The Beginner's Book—Written for readers who know nothing about computers—for those who have an interest in how to use computers—and for everyone else who must live with computers and should know a little about them. The first in a series of 4 volumes, this book will explain how computers work and what they can do. Computers have become an integral part of life and society. During any given day you are affected by computers, so start learning more about them with Volume 0. \$7.95.*


● **VOL. I**—BK1030—2nd Edition completely revised. Dedicated to the basic concepts of microcomputers and hardware theory. The purpose of Volume I is to give you a thorough understanding of what microcomputers are. From basic concepts (which are covered in detail), Volume I builds the necessary components of a microcomputer system. This book highlights the difference between minicomputers and microcomputers. \$12.50.*

● **VOL. II**—BK1040 (with binder)—\$30.00*—Contains descriptions of individual microprocessors and support devices used only with the parent microprocessor. Volume II describes all available chips.

● **VOL. III**—BK1133 (with binder)—\$20.00.* Contains descriptions of all support devices that can be used with any microprocessor.

● **HOW TO BUILD A MICROCOMPUTER—AND REALLY UNDERSTAND IT**—BK7325—by Sam Creason. The electronics hobbyist who wants to build his own microcomputer system now has a practical "How-To" guidebook. This book is a combination technical manual and programming guide that takes the hobbyist step-by-step through the design, construction, testing and debugging of a complete microcomputer system. Must reading for anyone desiring a true understanding of small computer systems. \$9.95.*

● **TOOLS & TECHNIQUES FOR ELECTRONICS**—BK7348—is an easy-to-understand book written for the beginning kit builder as well as the experienced hobbyist. It has numerous pictures and descriptions of the safe and correct ways to use basic and specialized tools for electronic projects as well as specialized metal working tools and the chemical aids which are used in repair shops. \$4.95.*

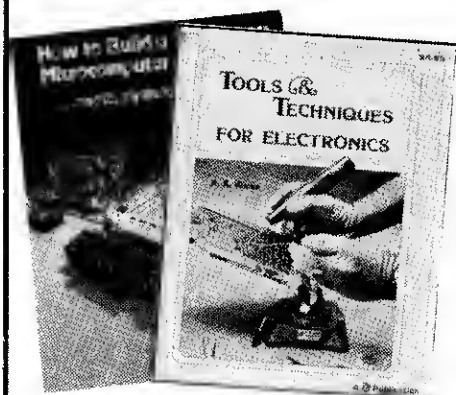

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to 80 Microcomputing Bookshelf • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All above add \$1.00 handling. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write Customer Service at the above address.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

Z80 BOOKS

● **TRS-80 DISK AND OTHER MYSTERIES**—BK1181—by Harvard C. Pennington. This is the definitive work on the TRS-80 disk system. It is full of detailed "How to" information with examples, samples and in-depth explanations suitable for beginners and professionals alike. The recovery of one lost file is worth the price alone. \$22.50.*

● **PROGRAMMING THE Z-80**—BK1122—by Rodnay Zaks. Here is assembly language programming for the Z-80 presented as a progressive, step-by-step course. This book is both an educational text and a self-contained reference book, useful to both the beginning and the experienced programmer who wish to learn about the Z-80. Exercises to test the reader are included. \$14.95.*

● **Z-80 ASSEMBLY LANGUAGE PROGRAMMING**—BK1177—by Lance A. Leventhal. This book thoroughly covers the Z80 instruction set, abounding in simple programming examples which illustrate software development concepts and actual assembly language usage. Features include Z80 I/O devices and interfacing methods, assembler conventions, and comparisons with 8080A/8085 instruction sets and interrupt structure. \$12.50.*

● **Z-80 SOFTWARE GOURMET GUIDE AND COOKBOOK**—BK1045—by Nat Wadsworth. Scelbi's newest cookbook! This book contains a complete description of the powerful Z-80 instruction set and a wide variety of programming information. Use the author's ingredients including routines, subroutines and short programs, choose a time-tested recipe and start cooking! \$15.95.*

● **INTRODUCTION TO TRS-80 GRAPHICS**—BK1180—by Don Inman. Dissatisfied with your Level I or Level II manual's coverage of graphics capabilities? This well-structured book (suitable for classroom use) is ideal for those who want to use all the graphics capabilities built into the TRS-80. A tutorial method is used with many demonstrations. It is based on the Level I, but all material is suitable for Level II use. \$8.95.*

BASIC

● **LEARNING LEVEL II**—BK1175—by David Lien. Written especially for the TRS-80, this book concentrates on Level II BASIC, exploring every important BASIC language capability. Updates are included for those who have studied the Level I User's Manual. Sections include: how to use the Editor, dual cassette operation, printers and peripheral devices, and the conversion of Level I programs to Level II. \$15.95.*

● **THE BASIC HANDBOOK**—BK1174—by David Lien. This book is unique. It is a virtual **ENCYCLOPEDIA** of BASIC. While not favoring one computer over another, it explains over 250 BASIC words, how to use them and alternate strategies. If a computer does not possess the capabilities of a needed or specified word, there are often ways to accomplish the same function by using another word or combination of words. That's where the **HANDBOOK** comes in. It helps you get the most from your computer, be it a "bottom-of-the-line" micro or an oversized monster. \$14.95.*

● **MY COMPUTER LIKES ME...WHEN I SPEAK BASIC**—BK1039—An introduction to BASIC...simple enough for kids. If you want to teach BASIC to anyone quickly, this is the way to go. \$3.95.*

● **ADVANCED BASIC**—BK1000—Applications, including strings and files, coordinate geometry, area, sequences and series, simulation, graphing and games. \$9.65.*

● **SIXTY CHALLENGING PROBLEMS WITH BASIC SOLUTIONS (2nd Edition)**—BK1073—by Donald Spencer, provides the serious student of BASIC programming with interesting problems and solutions. No knowledge of math above algebra required. Includes a number of game programs, as well as programs for financial interest, conversions and numeric manipulations. \$6.95.*




● **BASIC BASIC (2ND EDITION)**—BK1026—by James S. Coan. This is a textbook which incorporates the learning of computer programming using the BASIC language with the teaching of mathematics. Over 100 sample programs illustrate the techniques of the BASIC language and every section is followed by practical problems. This second edition covers character string handling and the use of data files. \$9.45.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to 80 Microcomputing Bookshelf • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All above add \$1.00 handling. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write Customer Service at the above address.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

GAMES

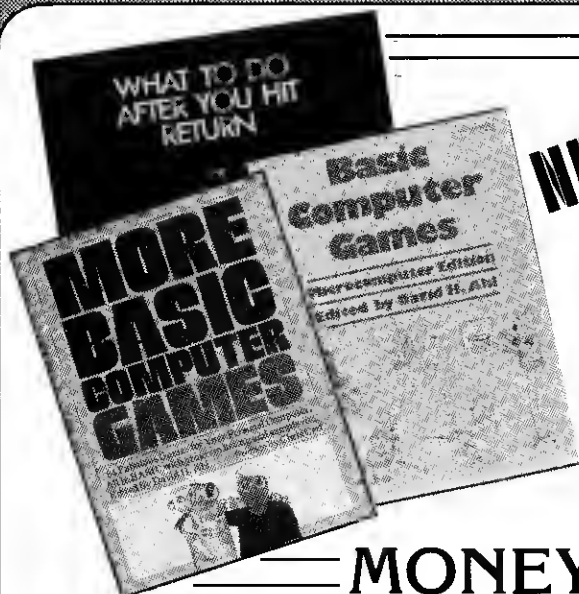

NEW!

● **MORE BASIC COMPUTER GAMES**—BK1182—edited by David H. Ahl. More fun in BASIC! 84 new games from the people who brought you *BASIC Computer Games*. Includes such favorites as Minotaur (battle the mythical beast) and Eliza (unload your troubles on the doctor at bargain rates). Complete with game description, listing and sample run. \$7.50.*

● **WHAT TO DO AFTER YOU HIT RETURN**—BK1071—PCC's first book of computer games... 48 different computer games you can play in BASIC... programs, descriptions, many illustrations. Lunar Landing, Hammurabi, King, Civel 2, Qubic 5, Taxman, Star Trek, Crash, Market, etc. \$10.95.*

● **BASIC COMPUTER GAMES**—BK1074—Okay, so once you get your computer and are running in BASIC, then what? Then you need some programs in BASIC, that's what. This book has 101 games for you from very simple to real buggers. You get the games, a description of the games, the listing to put in your computer and a sample run to show you how they work. Fun. Any one game will be worth more than the price of the book for the fun you and your family will have with it. \$7.50.*

MONEY-MAKING

● **HOW TO MAKE MONEY WITH COMPUTERS**—BK1003—In 10 information-packed chapters, Jerry Felsen describes more than 30 computer-related, money-making, high profit, low capital investment opportunities. \$15.00.*


● **HOW TO SELL ANYTHING TO ANYBODY**—BK7306—According to *The Guinness Book of World Records*, the author, Joe Girard, is "the world's greatest salesman." This book reveals how he made a fortune—and how you can, too. \$2.25.*

● **FREELANCE SOFTWARE PUBLISHING**—BK1179—by B. J. Korites. "This book is about money and how to make it by writing and selling computer programs," (author's foreword). If you have the skills to write a saleable program, you now need to acquire the skills to sell that program. This compact book comprehensively covers the entire publishing process and many aspects of software salesmanship. \$14.95.*

● **THE INCREDIBLE SECRET MONEY MACHINE**—BK1178—by Don Lancaster. A different kind of "cookbook" from Don Lancaster. Want to slash taxes? Get free vacations? Win at investments? Make money from something that you like to do? You'll find this book essential to give you the key insider details of what is really involved in starting up your own money machine. \$5.95.*



BUSINESS

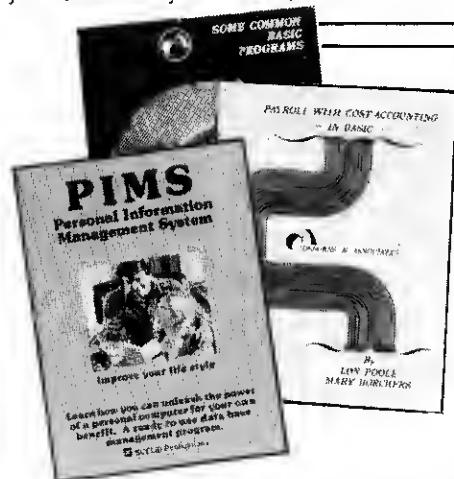

● **PAYROLL WITH COST ACCOUNTING—IN BASIC**—BK1001—by L. Poole & M. Borchers, includes program listings with remarks, descriptions, discussions of the principle behind each program, file layouts, and a complete user's manual with step-by-step instructions, flowcharts, and simple reports and CRT displays. Payroll and cost accounting features include separate payrolls for up to 10 companies, time-tested interactive data entry, easy correction of data entry errors, job costing (labor of distribution), check printing with full deduction and pay detail, and 16 different printed reports, including W-2 and 941 (in CBASIC). \$20.00.*

● **SOME COMMON BASIC PROGRAMS**—BK1053—published by Adam Osborne & Associates, Inc. Perfect for non-technical computerists requiring ready-to-use programs. Business programs, plus miscellaneous programs. Invaluable for the user who is not an experienced programmer. All will operate in the stand-alone mode. \$12.50 paperback.*

● **PIMS: PERSONAL INFORMATION MANAGEMENT SYSTEM**—BK1009—Learn how to unleash the power of a personal computer for your own benefit in this ready-to-use data-base management program. \$11.95.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to 80 Microcomputing Bookshelf • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All above add \$1.00 handling. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write Customer Service at the above address.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

ADVERTISERS

RS Number	Page	RS Number	Page	RS Number	Page
282 ACR Consultants.....	151	141 FEC Ltd.....	179	178 Omni Automation.....	40
368 AEM Computer Services.....	161	12 FMG.....	106	296 Orange Micro.....	171
311 Abacus Computer.....	163	252 Ferin Enterprises.....	175	108 Orthon Computer.....	183
34 Acorn Software Products.....	70	102 Fuller Software.....	155	96 PCD Systems.....	157
161 Acorn Software Products.....	40	170 Allen Gelder Software.....	40	370 Pacific Exchanges.....	163
97 Adventure International.....	65	75 Godbout.....	173	228 Palomar Software.....	147
387 Aerocomp, Inc.....	167	218 Good-Lyddon Data Systems.....	142	64 Pan American Electronics.....	172
69 Alpha Byte Storage.....	119	270 Mark Gordon Computers.....	153, 166	207 Pensadyne Computer Services.....	117
210 Alpha Products Company.....	64	317 Hanson House.....	134	258 Percom Data Company.....	58
401 Alpha Products Company.....	64	313 Harris Data Systems.....	150	408-411 Percom Data Company.....	3
138 The Alternate Source.....	93, 151	383 Heath Company.....	11	1 Percom Data Company.....	Cov. II
397 American Business Computers.....	126	23 Hobby World Electronics.....	187	171 Percom Data Company.....	38
396 American Fan Distributors.....	104	13 Houston Micro-Computer Tech., Inc.....	53	43 The Peripheral People.....	162
264 Apparat.....	39, 112, 113	103 Howe Software.....	147	393 Personal Computing 80.....	125
47 Applied Economic Analysis.....	67	37 IJG Inc.....	88, 89	325 Personal Micro Computer, Inc.....	37
122 Archbold Electronics.....	134	301 Information Technology Systems.....	151	17 The Program Store/Realsoft.....	91
146 Audio Video Systems.....	162	300 Information Technology Systems.....	106	21 Programma International.....	111
367 Audio Video Systems.....	134	2 Instant Software.....	34, 35, 176, 177	364 The Programmers Guild.....	179
375 Audio Video Systems.....	150	378 Integrated Service Systems, Inc.....	179	395 OC Microsystems.....	67
49 Basics and Beyond, Inc.....	181	246 Interface, Inc.....	142	269 Quant Systems.....	117
351 The Berg Works.....	61	319 Interface Technology.....	74	41 Racet Computers.....	94
357 Big Five Software Company.....	171	287 Interlude.....	15	166 Radio Shack (TX).....	40
235 The Bottom Line.....	126	187 International Software Assoc.....	141	400 Radio Shack Dealer (MA).....	142
6 The Bottom Shelf, Inc.....	46	315 JLS.....	162	406 Rand Labs.....	131
57 Bourrut Consulting Corp.....	181	249 JMS Corp.....	185	241 Rational Software.....	49
382 Business Micro Products.....	172	190 JPC Products.....	57	372 Realty Software Co.....	134
388 CP Aids.....	175	398 J & R Electronics.....	186	70 Remsoft Inc.....	185
298 CPU Shop.....	101	193 Joe Computer.....	155	276 Richcraft Engineering Ltd.....	163
145 C&S Electronics.....	165	293 Johnson Associates.....	182	182 Rochester Data, Inc.....	38
294 Caldata Systems.....	173	226 Johnson Data.....	74	191 Rondure Company.....	143
* Calsoft.....	146	353 Kalgio Electronics Co., Inc.....	134	271 S-C Computer Technology.....	163
62 Cecdat, Inc.....	180	394 Karlant Publishing Co., Inc.....	186	244 SJW, Inc.....	165
195 Cecdat, Inc.....	134	184 Key Systems, Inc.....	37, 38	* S & M Systems, Inc.....	85, 147
381 Robert M. Chambers.....	157	* Kilobaud Microcomputing.....	168	291 Scientific Engineering Lab.....	143
46 Checks To-Go.....	30	149 Kogyosha Company.....	169	290 Semi-Soft.....	155
32 Cloud Magazine.....	129	53 LNW Research.....	97	297 Service Technologies, Inc.....	183
363 Compu-services.....	150, 162	14 Level IV Products, Inc.....	120	255 Michael Shrayar Software, Inc.....	149
100 CompuCover.....	131	15 Lobo Drives International.....	Cov. III	413 SimpleSoft-DBM.....	61
386 CAMI.....	175	180 MPS Software.....	40	67 Sirius Systems.....	127
312 Computer Business Systems.....	79	95 Andrew Machen.....	159	402 Electronics.....	145
199 Computer Case Company.....	157	318 Maco Manufacturing.....	134	30 Small System Software.....	151
240 Computer Forms.....	131	59 Magnetic Media Distributors.....	135	232 Snapp, Inc.....	51
163 Computer Simulations Co.....	40	87 Management Systems Software.....	175	358 Software Affairs.....	48
390 Computer Textiles.....	90	90 Manhattan Software, Inc.....	61	399 Software Efficiency.....	163
321 Computers Unlimited.....	106	179 Manhattan Software, Inc.....	38	176 Software Engineering System, Inc.....	37
215 ComputerCity.....	102	16 Matchless Systems.....	159	42 Software Etc.....	9
392 Computex.....	142	128 Med Systems Software.....	183	284 Software Exchange.....	115
9 Computronics, Inc.....	80, 81, 82, 63	104 Mercer Systems, Inc.....	157	286 The Software Mart.....	22, 23
10 Contract Services Associates.....	133	20 Meta Technologies Corp.....	6, 7	277 Solutions 80.....	157, 163
165 Corvus Systems.....	38	406 Meta Technologies Corp.....	4	316 Southeastern Software.....	81
233 Cottage Software.....	147	54 Micro Architect.....	97	373 Southern Innovative Design (SID).....	29
119 Crown Plastics.....	175	379 Micro-Design.....	169	275 Speedway Electronics.....	166
* Cryptext Corporation.....	73	89 Micro Learningware.....	183	82 Sturdivant & Dunn, Inc.....	126
7 Custom Computer Center.....	33	72 Micro Management Systems, Inc.....	41	267 Suma Microwave.....	74
121 Custom Electronics.....	162	68 Micro Matrix.....	141	217 Sumware.....	162
* Cybernetics, Inc.....	47	309 Micro Mega.....	49	403 Superior Software.....	157
371 Daltex.....	72	29 Micro Mega.....	78	* Synergistic Solar, Inc.....	163
44 Data Train, Inc.....	106	310 Micro Mint.....	163	358 Syracuse R & D Center.....	115
274 Data Trans.....	165	384 Micro Systems Software Inc.....	71	148 Tab Sales Co.....	143
352 Datascore.....	49	28 Microcomputer Tech., Inc.....	39, 112, 113	380 Tailronics Enterprises.....	173
407 DataSoft.....	169	360 Microtek.....	27	45 Taranto & Associates.....	75
366 Discount Data Forms.....	63	* Micron, Inc.....	185	147 Task Computer Applications.....	150
* Discovery Bay Software Co.....	185	112 Miller Microcomputer Services.....	183	376 Think Tank Labs.....	157
412 Discovery Games.....	150	24 Mini Micro Mart, Inc.....	190	303 Tora Systems Limited.....	173
88 Documan Software.....	169	221 MISOSYS.....	142	385 Trimm Enclosure Products.....	96
359 EDF.....	117	158 MOM's.....	189	84 Ultimate Computer Systems.....	49
* Eighty Microcomputing.....	19, 141, 150, 161, 166, 180, 191-193	324 Britt Monk.....	143	292 Universal Interface.....	123
63 Elcompco.....	74, 121	285 Mullen Computer Products.....	73	31 V R Data Corp.....	179
58 Electronic Specialists.....	77	144 Mumford Micro Systems.....	99	111 Vern Street Products.....	106
26 Electronic Systems.....	188	142 National Tricor, Inc.....	155	27 Web Associates.....	72, 77
278 Emrol Systems, Inc.....	98	216 National Tricor, Inc.....	174	314 Williams Enterprises.....	161
225 En-Joy Computer Programs.....	163	323 New Wave Electronics, Inc.....	115	355 Zocchi Distributors.....	185
404 Epson America, Inc.....	139	116 Newby Software Development Co.....	183	163 Zoom.....	38
40 Esmark.....	96	74 Northeast Microwave.....	161		
3 Exatron.....	Cov. IV, 17	177 Occupational Computing Co.....	37		
		389 Omega Sales.....	63		

This advertiser prefers to be contacted directly.

Selling Lobo Drives Disk Memory Systems makes a lot of 'cents'.

Yes, becoming a LOBO DRIVES Dealer can make a lot of sense. For one thing, the demand for disk drive memory systems is growing... and will continue to grow for the next several years. Let LOBO DRIVES help you get your share of this expanding market.

- **DEALER DISCOUNTS** - LOBO offers a discount schedule that lets you increase your profitability.
- **DEALER SUPPORT** - LOBO backs its dealers with leads generated by national advertising; local, regional, and national trade shows; special promotions; outstanding documentation; quick response to phone calls; and delivering a quality product at a fair price, on time.
- **1 YEAR WARRANTY** - LOBO is so confident in the quality of its drives, it offers your customers a 1 year 100% parts/labor warranty. How's that for a selling point?
- **LARGE FAMILY OF PRODUCTS** - Only LOBO offers you a large selection of 5.25- and 8-inch floppy disk drives, and Winchester hard disk drives for TRS-80, APPLE and S-100 bus computers.

- **TECHNOLOGY LEADERSHIP** - All LOBO products represent the latest in the state-of-the-art technology. When there is something new in disk drive technology, LOBO will be the first to have it.

USING LOBO DRIVES MAKES GOOD SENSE... SELLING LOBO DRIVES MAKES MORE...

Call or write today for your dealer information kit.



INTERNATIONAL

TRS-80 • S-100 • Apple II • IBM • PC • XT • AT • XT • AT • XT • AT

935 Camino Del Sur
Goleta, California 93017
(805) 835-4546

"CAN YOU REALLY AFFORD
TO PAY LESS?"





STARTER KIT

EXATRON STRINGY FLOPPY FOR THE TRS-80

Recommended initial purchase:

Exatron Stringy Floppy	\$249.50	SPECIAL PRICE FOR THIS STARTER KIT	\$299.50
3 Wafers each: 5', 10', 20', 50'	40.00	Sales Tax (California only)	
Bus Extender, 2-for-1	15.00	Shipping and Handling	5.50
ESF Machine Language Monitor	9.95		
Wafer Organizer	5.00		
	<u>\$319.45</u>	TOTAL	

For more information see the current Exatron Stringy Floppy Owners Association Newsletter in *Microcomputing*.

If you have any questions about the product, about Exatron, or ESFOA, please call the Hot Line. Address letters to ESFOA, 3555 Ryder St., Santa Clara, CA 95051.

Stringy Floppy is a trademark of Exatron Corporation.

HOT LINE (For Calls Outside CA) 800-538-8559



excellence in electronics

exatron

3555 Ryder Street ■ Santa Clara, California 95051
(408) 737-7111